downloaded from: lib.ommolketab.ir



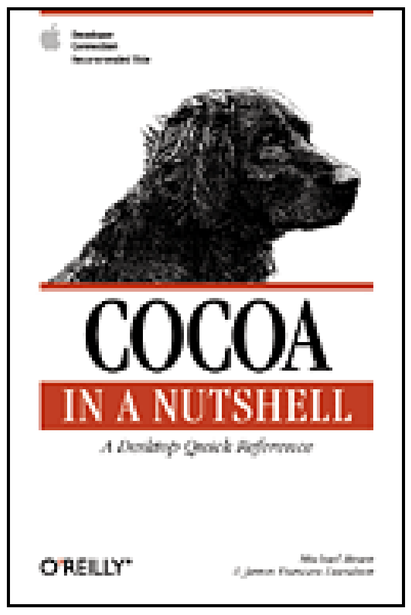



- Table of Contents
- Index
- Reviews
- Reader Reviews
- Errata


Cocoa in a Nutshell

By Michael Beam, James Duncan Davidson


Publisher: O'Reilly

Date Published: May 2003

ISBN: 0-596-00462-1

Pages: 566


*Cocoa in a Nutshell* begins with a complete overview of Cocoa's object classes. It provides developers who may be experienced with other application toolkits the grounding they'll need to start developing Cocoa applications. A complement to Apple's documentation, it is the only reference to the classes, functions, types, constants, protocols, and methods that make up Cocoa's Foundation and Application Kit frameworks, based on the Jaguar release (Mac OS X 10.2).



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

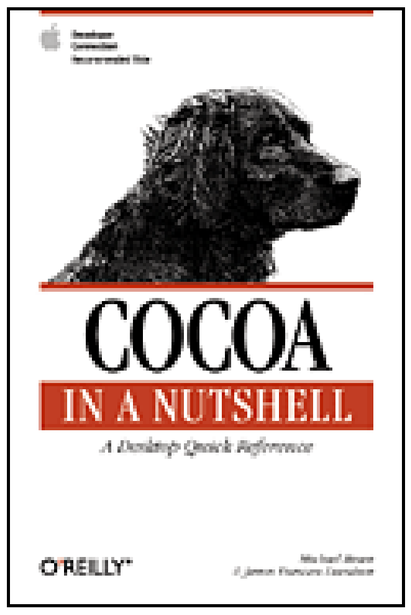


- Table of Contents
- Index
- Reviews
- Reader Reviews
- Errata

Cocoa in a Nutshell

By Michael Beam, James Duncan Davidson

Publisher: O'Reilly
Date Published: May 2003
ISBN: 0-596-00462-1
Pages: 566

Copyright
Preface
What Is Cocoa?
How This Book Is Organized
Conventions Used in This Book
How the Quick Reference Was Generated
Comments and Questions
Acknowledgments

Part I: Introducing Cocoa
Chapter 1. Objective-C
Section 1.1. Objects
Section 1.2. Messaging
Section 1.3. Classes
Section 1.4. Creating Object Instances
Section 1.5. Memory Management
Section 1.6. Deallocating Objects

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Section 1.7. Categories
Section 1.8. Naming Conventions

Chapter 2. Foundation
Section 2.1. Data
Section 2.2. Key-Value Coding
Section 2.3. Working with Files
Section 2.4. Bundles and Resource Management
Section 2.5. Archiving Objects
Section 2.6. User Defaults
Section 2.7. Notifications
Section 2.8. Operating System Interaction
Section 2.9. Threaded Programming

Chapter 3. The Application Kit
Section 3.1. AppKit Design Patterns
Section 3.2. Nibs
Section 3.3. Application Architecture
Section 3.4. Controls
Section 3.5. Menus
Section 3.6. Sheets
Section 3.7. Drawers
Section 3.8. Toolbars
Section 3.9. Event Handling
Section 3.10. Document-Based Applications

Chapter 4. Drawing and Imaging
Section 4.1. The Role of Quartz
Section 4.2. Coordinate Systems
Section 4.3. Graphics Contexts
Section 4.4. Working with Paths
Section 4.5. Drawing Text
Section 4.6. Working with Color
Section 4.7. Working with Images
Section 4.8. Transformations

Chapter 5. Text Handling
Section 5.1. Text System Architecture
Section 5.2. Assembling the Text System

Chapter 6. Networking
Section 6.1. Hosts
Section 6.2. URL Resources
Section 6.3. Rendezvous Network Services
Section 6.4. Sockets
Section 6.5. NSFileHandle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Chapter 7. Interapplication Communication
Section 7.1. NSPipe

Chapter 8. Other Frameworks
Section 8.1. AddressBook
Section 8.2. The Message Framework
Section 8.3. Disc Recording Frameworks
Section 8.4. Third-Party Frameworks

Part II: API Quick Reference
Chapter 9. Foundation Types and Constants
Section 9.1. Data Types
Section 9.2. Enumerations
Section 9.3. Global Variables
Section 9.4. Constants
Section 9.5. Exceptions

Chapter 10. Foundation Functions
Section 10.1. Assertions
Section 10.2. Bundles
Section 10.3. Byte Ordering
Section 10.4. Decimals
Section 10.5. Java Setup
Section 10.6. Hash Tables
Section 10.7. HFS File Types
Section 10.8. Map Tables
Section 10.9. Object Allocation
Section 10.10. Objective-C Runtime
Section 10.11. Path Utilities
Section 10.12. Points
Section 10.13. Ranges
Section 10.14. Rects
Section 10.15. Sizes
Section 10.16. Uncaught Exceptions
Section 10.17. Zones

Chapter 11. Application Kit Types and Constants
Section 11.1. Data Types
Section 11.2. Enumerations
Section 11.3. Global Variables
Section 11.4. Exceptions

Chapter 12. Application Kit Functions
Section 12.1. Accessibility
Section 12.2. Applications
Section 12.3. Events

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Section 12.4. Fonts
Section 12.5. Graphics: General
Section 12.6. Graphics: Window Depth
Section 12.7. Interface Styles
Section 12.8. OpenGL
Section 12.9. Panels
Section 12.10. Pasteboards
Section 12.11. System Beep

Chapter 13. Foundation Classes
NSAppleEventDescriptor
NSAppleEventManager
NSAppleScript
NSArchiver
NSArray
NSAssertionHandler
NSAttributedString
NSAutoreleasePool
NSBundle
NSCalendarDate
NSCharacterSet
NSClassDescription
NSCloneCommand
NSCloseCommand
NSCoder
NSConditionLock
NSConnection
NSCountCommand
NSCountedSet
NSCreateCommand
NSData
NSDate
NSDateFormatter
NSDecimalNumber
NSDecimalNumberHandler
NSDeleteCommand
NSDeserializer
NSDictionary
NSDirectoryEnumerator
NSDistantObject
NSDistantObjectRequest
NSDistributedLock
NSDistributedNotificationCenter
NSEnumerator
NSException
NSExistsCommand

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSFileHandle
NSFileManager
NSFormatter
NSGetCommand
NSHost
NSIndexSpecifier
NSInvocation
NSKeyedArchiver
NSKeyedUnarchiver
NSLock
NSLogicalTest
NSMachBootstrapServer
NSMachPort
NSMessagePort
NSMessagePortNameServer
NSMethodSignature
NSMiddleSpecifier
NSMoveCommand
NSMutableArray
NSMutableAttributedString
NSMutableCharacterSet
NSMutableData
NSMutableDictionary
NSMutableSet
NSMutableString
NSNameSpecifier
NSNetService
NSNetServiceBrowser
NSNotification
NSNotificationCenter
NSNotificationQueue
NSNull
NSNumber
NSNumberFormatter
NSObject
NSPipe
NSPort
NSPortCoder
NSPortMessage
NSPortNameServer
NSPositionalSpecifier
NSProcessInfo
NSPropertyListSerialization
NSPropertySpecifier
NSProtocolChecker
NSProxy

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSQuitCommand
NSRandomSpecifier
NSRangeSpecifier
NSRecursiveLock
NSRelativeSpecifier
NSRunLoop
NSScanner
NSScriptClassDescription
NSScriptCoercionHandler
NSScriptCommand
NSScriptCommandDescription
NSScriptExecutionContext
NSScriptObjectSpecifier
NSScriptSuiteRegistry
NSScriptWhoseTest
NSSerializer
NSSet
NSSetCommand
NSSocketPort
NSSocketPortNameServer
NSSpecifierTest
NSSpellServer
NSString
NSTask
NSThread
NSTimer
NSTimeZone
NSUnarchiver
NSUndoManager
NSUniqueIDSpecifier
NSURL
NSURLHandle
NSUserDefaults
NSValue
NSWhoseSpecifier

Chapter 14. Foundation Protocols
NSCoding
NSComparisonMethods
NSCopying
NSDecimalNumberBehaviors
NSKeyValueCoding
NSLocking
NSMutableCopying
NSObjCTypeSerializationCallBack
NSObject

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSScriptingComparisonMethods
NSScriptKeyValueCoding
NSScriptObjectSpecifiers
NSURLHandleClient

Chapter 15. Application Kit Classes
NSActionCell
NSAffineTransform
NSApplication
NSBezierPath
NSBitmapImageRep
NSBox
NSBrowser
NSBrowserCell
NSButton
NSButtonCell
NSCachedImageRep
NSCell
NSClipView
NSColor
NSColorList
NSColorPanel
NSColorPicker
NSColorWell
NSComboBox
NSComboBoxCell
NSControl
NSCursor
NSCustomImageRep
NSDocument
NSDocumentController
NSDrawer
NSEPSImageRep
NSEvent
NSFileWrapper
NSFont
NSFontManager
NSFontPanel
NSForm
NSFormCell
NSGlyphInfo
NSGraphicsContext
NSHelpManager
NSImage
NSImageCell
NSImageRep

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSImageView
NSInputManager
NSInputServer
NSLayoutManager
NSMatrix
NSMenu
NSMenuItem
NSMenuItemCell
NSMenuView
NSMovie
NSMovieView
NSMutableParagraphStyle
NSNibConnector
NSNibControlConnector
NSNibOutletConnector
NSOpenGLContext
NSOpenGLPixelFormat
NSOpenGLView
NSOpenPanel
NSOutlineView
NSPageLayout
NSPanel
NSParagraphStyle
NSPasteboard
NSPDFImageRep
NSPICTImageRep
NSPopUpButton
NSPopUpButtonCell
NSPrinter
NSPrintInfo
NSPrintOperation
NSPrintPanel
NSProgressIndicator
NSQuickDrawView
NSResponder
NSRulerMarker
NSRulerView
NSSavePanel
NSScreen
NSScroller
NSScrollView
NSSecureTextField
NSSecureTextFieldCell
NSSimpleHorizontalTypesetter
NSSlider
NSSliderCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSSound
NSSpellChecker
NSSplitView
NSStatusBar
NSStatusItem
NSStepper
NSStepperCell
NSTableColumn
NSTableHeaderCell
NSTableHeaderView
NSTableView
NSTabView
NSTabViewItem
NSText
NSTextAttachment
NSTextAttachmentCell
NSTextContainer
NSTextField
NSTextFieldCell
NSTextStorage
NSTextTab
NSTextView
NSToolbar
NSToolbarItem
NSTypesetter
NSView
NSWindow
NSWindowController
NSWorkspace

Chapter 16. Application Kit Protocols
NSAccessibility
NSChangeSpelling
NSColorPickingCustom
NSColorPickingDefault
NSComboBoxCellDataSource
NSComboBoxDataSource
NSDraggingDestination
NSDraggingInfo
NSDraggingSource
NSIgnoreMisspelledWords
NSInputServerMouseTracker
NSInputServiceProvider
NSMenuItem
NSMenuValidation
NSNibAwaking

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSOutlineViewDataSource
NSServicesRequests
NSTableDataSource
NSTextAttachmentCell
NSTextInput
NSTextStorageScripting
NSToolbarItemValidation
NSToolTipOwner
NSUserInterfaceValidations
NSValidatedUserInterfaceItem
NSWindowScripting

Method Index
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
XYZ

Part III: Appendix
Appendix A. Appendix: Resources for Cocoa Developers
Section A.1. Apple Documentation
Section A.2. Related Books
Section A.3. Web Sites
Section A.4. Mailing Lists
Section A.5. Partnering with Apple

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Colophon
Index
[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

Copyright © 2003 O'Reilly & Associates, Inc.

Printed in the United States of America.

Published by O'Reilly & Associates, Inc., 1005 Gravenstein Highway North, Sebastopol, CA 95472.

O'Reilly & Associates books may be purchased for educational, business, or sales promotional use. Online editions are also available for most titles (http://safari.oreilly.com). For more information, contact our corporate/institutional sales department: (800) 998-9938 or corporate@oreilly.com.

Nutshell Handbook, the Nutshell Handbook logo, and the O'Reilly logo are registered trademarks of O'Reilly & Associates, Inc. Many of the designations used by manufacturers and sellers to distinguish their products are claimed as trademarks. Where those designations appear in this book, and O'Reilly & Associates, Inc. was aware of a trademark claim, the designations have been printed in caps or initial caps. The association between the image of an Irish setter and the topic of Cocoa is a trademark of O'Reilly & Associates, Inc.

Apple Computer, Inc. boldly combined open source technologies with its own programming efforts to create Mac OS X, one of the most versatile and stable operating systems now available. In the same spirit, Apple has joined forces with O'Reilly & Associates to bring you an indispensable collection of technical publications. The ADC logo indicates that the book has been technically reviewed by Apple engineers and is recommended by the Apple Developer Connection.

Apple, the Apple logo, AppleScript, AppleTalk, AppleWorks, Carbon, Cocoa, ColorSync, Finder, FireWire, iBook, iMac, iPod, Mac, Mac logo, Macintosh, PowerBook, QuickTime, QuickTime logo, Sherlock, and WebObjects are trademarks of Apple Computer, Inc., registered in the United States and other countries. The "keyboard" Apple logo ( ) is used with permission of Apple Computer, Inc.

While every precaution has been taken in the preparation of this book, the publisher and authors assume no responsibility for errors or omissions, or for damages resulting from the use of the information contained herein.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Preface

It's practically impossible to know Cocoa inside and out. There was once a discussion between two programmers about Cocoa's large APIs: one was a veteran Perl programmer, the other a Cocoa programmer. The Perl programmer grumbled about the intimidating and verbose Cocoa APIs, saying there was simply too much to remember. Bemused, the Cocoa programmer retorted: "You don't *remember* Cocoa; you look it up!"

The point the Cocoa programmer was trying to impress upon the Perl programmer was that understanding object-oriented programming (OOP) concepts and the architecture of the frameworks is more important than remembering the wordy and numerous method and class names in the Cocoa frameworks.

This book is a compact reference that will hopefully grow worn beside your keyboard. Split into two parts, *Cocoa in a Nutshell* first provides an overview of the frameworks that focuses on both common programming tasks and how the parts of the framework interact with one another. The second part of the book is an API quick reference that frees you from having to remember method and class names so you can spend more time hacking code. This book covers the Cocoa frameworks-Foundation and Application Kit (AppKit)-as of Mac OS X 10.2 (Jaguar).



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# What Is Cocoa?

Cocoa is a complete set of classes and application programming interfaces (APIs) for building Mac OS X applications and tools. With over 240 classes, Cocoa is divided into two essential frameworks: the Foundation framework and the Application Kit.

The Foundation framework provides a fundamental set of tools for representing fundamental data types, accessing operating system services, threading, messaging, and more. The Application Kit provides the functionality to build graphical user interfaces (GUI) for Cocoa applications. It provides access to the standard Aqua interface components ranging from menus, buttons, and text fields-the building blocks of larger interfaces-to complete, prepackaged interfaces for print dialogs, file operation dialogs, and alert dialogs. The Application Kit also provides higher-level functionality to implement multiple document applications, text handling, and graphics.

Classes are not the only constituents of the Cocoa frameworks. Some programming tasks, such as sounding a system beep, are best accomplished with a simple C function. Cocoa includes a number of functions for accomplishing tasks such as manipulating byte orders and drawing simple graphics. Additionally, Cocoa defines a number of custom data types and constants to provide a higher degree of abstraction to many method parameters.

## The Cocoa Development Environment

Project Builder and Interface Builder are the two most important applications used in Cocoa development. *Project Builder* is the interactive development environment (IDE) for Mac OS X used to manage and edit source files, libraries, frameworks, and resources. Additionally, it provides an interface to the Objective-C compiler, *gcc*, and the GNU debugger, *gdb*.

*Interface Builder* is used to create GUIs for Cocoa applications by allowing developers to manipulate UI components (such as windows and buttons) graphically using drag and drop. It provides assistance for laying out components by providing visual cues that conform to Apple's Aqua Human Interface Guidelines. From an inspector panel, the behavior and appearance of these components can be tweaked in almost every way the component supports. Interface Builder provides an intuitive way to connect objects by letting the user drag wires between objects. This way, you set up the initial network of objects in the interface. In addition, you can interface without having to compile a single bit of code.

Interface components are not the only objects that can be manipulated with Interface Builder. You can subclass any Cocoa class and create instances of the subclasses. More importantly, you can give these classes instance variables, known as *outlets*, and methods, called *actions*, and hook them up to user interface components. Interface Builder can then create source files for these subclasses, complete header files, and an implementation file including stubs for the action methods. There is much more to Interface Builder and Project Builder than we can cover in this book, but as you can begin to imagine, the tight integration of these two applications create a compelling application development environment.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

## Cocoa Design Patterns

Cocoa uses many design patterns. *Design patterns* are descriptions of common object-oriented programming practices. Effective application development requires that you know how and where to use patterns in Cocoa. *Cocoa in a Nutshell* discusses these patterns in the context in which they are used. Here is a brief list of the design patterns you will encounter in the book:

*Delegation*

In this pattern, one object, the delegate, acts on behalf of another object. Delegation is used to alter the behavior of an object that takes a delegate. The developer's job is to implement any number of methods that may be invoked in the delegate. Delegation minimizes the need to subclass objects to extend their functionality.

*Singleton*

This pattern ensures that only one object instance of a class exists in the system. A singleton method is an object constructor that creates an instance of the class and maintains a reference to that object. Subsequent invocations of the singleton constructor return the existing object, rather than create a new one.

*Notification*

Notifications allow decoupling of message senders from multiple message receivers. Cocoa implements this pattern in the notification system used throughout the frameworks. It is discussed in Chapter 2.

*Model-View-Control*

The Model-View-Controller (MVC) pattern is used extensively in the Application Kit to separate an application into logically distinct units: a model, which knows how to work with application data, the view, which is responsible for presenting the data to the user, and the controller, which handles interaction between the model and the view. Chapter 3 discusses MVC in more detail.

*Target/action*

The target/action pattern decouples user-interface components, such as buttons and menu items, with the objects (the targets) that implement their actions. In this pattern, an activated control sends an action message to its target. Chapter 3 discusses this topic further.

*Responder chain*

The responder chain pattern is used in the event handling system to give multiple objects a chance to respond to an event. This topic is discussed in Chapter 3.

*Key-value coding*

Key-value coding provides an interface for accessing an object's properties indirectly by name. Chapter 2 covers key-value coding more thoroughly.

## Benefits

These days, application developers expect a lot from their tools, and users expect a lot from any application they use. Any application or application toolkit that neglects these needs is destined for failure. Cocoa comes through grandly by providing the features needed in applications now and in the future, including:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

*Framework-based development*

Cocoa development is based on its frameworks: the Foundation framework and the Application Kit. With framework-based programming, the system takes a central role in the life of an application by calling out to code that you provide. This role allows the frameworks to take care of an application's behind-the-scene details and lets you focus on providing the functionality that makes your application unique.

*"For free" features*

Cocoa provides a lot of standard application functionality "for free" as part of the frameworks. These features not only include the large number of user-interface components, but larger application subsystems such as the text-handling system and the document-based application architecture. Because Apple has gone to great lengths to provide these features as a part of Cocoa, developers can spend less time doing the repetitive work that is common between all applications, and more time adding unique value to their application.

*The development environment*

As discussed earlier, Project Builder and Interface Builder provide a development environment that is highly integrated with the Cocoa frameworks. Interface Builder is used to quickly build user interfaces, which means less tedious work for the developer.

Cocoa's most important benefit is that it lets you develop applications dramatically faster than with other application frameworks.

## Languages

Cocoa's native language is Objective-C. The Foundation and Application Kit frameworks are implemented in Objective-C, and using Objective-C provides access to all features of the frameworks. Chapter 1 covers Objective-C in depth.

Objective-C is not, however, the only language through which you can access the Cocoa frameworks. Through the Java Bridge, Apple provides a way to access the Cocoa frameworks using the Java language. The Java Bridge does not provide a complete solution since many of Cocoa's advanced features, such as the distributed objects system, are not available with Java. This book will not discuss Cocoa application development with Java.

Another option for working with Cocoa is AppleScript. AppleScript has traditionally been associated with simple scripting tasks, but with Mac OS X, Apple enabled AppleScript access to the Cocoa frameworks via AppleScript Studio. AppleScript Studio provides hooks into the Cocoa API so scripters can take their existing knowledge of AppleScript, write an application in Project Builder, and use Interface Builder to give their applications an Aqua interface-all without having to learn Objective-C. This exposes Cocoa to a completely new base of Macintosh developers, who know enough AppleScript to build simple task-driven applications for solving common problems. For more information about AppleScript Studio, see http://www.apple.com/applescript/studio.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# How This Book Is Organized

This book is split into two parts: the overview of Cocoa familiarizes developers with Cocoa's structure and the API quick reference contains method name listings and brief descriptions for all Foundation and Application Kit framework classes.

Part I is divided into the following eight chapters:

*Chapter 1, Objective-C*

This chapter introduces the use of Objective-C language. Many object-oriented concepts you may be familiar with from other languages are discussed in the context of Objective-C, which lets you leverage your previous knowledge.

*Chapter 2, Foundation*

This chapter discusses the Foundation framework classes that all programs require for commor programming tasks such as data handling, process control, run loop management, and interapplication communication.

*Chapter 3, The Application Kit*

This chapter introduces the Application Kit and details larger abstractions of the Application Kit such as how events are handled with responder chains, the document-based application architecture, and other design patterns that are important in Cocoa development.

*Chapter 4, Drawing and Imaging*

This chapter discusses Cocoa's two-dimensional (2D) graphics capabilities available in the Application Kit.

*Chapter 5, Text Handling*

This chapter details the architecture of Cocoa's advanced text-handling system, which provides a rich level of text-handling functionality for all Cocoa developers.

*Chapter 6, Networking*

This chapter summarizes networking technologies, such as Rendezvous and URL services, that are accessible from a Cocoa application.

*Chapter 7, Interapplication Communication*

This chapter discusses interapplication communication techniques, including distributed objects pipes, and distributed notifications.

*Chapter 8, Other Frameworks*

This chapter provides information about the many Objective-C frameworks that can be used in conjunction with Cocoa. These frameworks include those that are part of Mac OS X, such as AddressBook and DiscRecording, as well as frameworks supplied by third-party developers.

Part II contains Foundation and AppKit framework references and, as such, makes up the bulk of the book. First, there's an explanation of the organization of chapters inPart II and how class information is referenced. The rest of the section is divided into eight chapters and a method index. Each chapter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

focuses on a different part of the Cocoa API.

*Chapter 9, Foundation Types and Constants*

This chapter lists the data types and constants defined by the Foundation framework.

*Chapter 10, Foundation Functions*

This chapter lists the functions defined by the Foundation framework.

*Chapter 11, Application Kit Types and Constants*

This chapter lists the data types and constants defined by the Application Kit.

*Chapter 12, Application Kit Functions*

This chapter lists the functions defined by the Application Kit.

*Chapter 13, Foundation Classes*

This chapter contains the API quick-reference Foundation framework classes.

*Chapter 14, Foundation Protocols*

This smaller chapter covers the handful of protocols declared as part of the Foundation framework.

*Chapter 15, Application Kit Classes*

This chapter provides the API quick reference for Application Kit classes.

*Chapter 16, Application Kit Protocols*

This chapter provides reference to the protocols defined and used in the AppKit.

*Chapter 17, Method Index*

This index contains an alphabetical listing of every method in the Foundation framework and Application Kit. Each method name in the index has a list of classes that implement that method.

Unlike the rest of the book's sections, there is but one short appendix in Part III. Regardless of your experience level as a Mac developer, this section contains valuable resources for Cocoa programmers, including details on how you can partner with Apple to market your application.

*Appendix A*

This appendix lists vital resources for Cocoa developers, including Apple developer documentation, web sites, mailing lists, books, and details on how to partner with Apple to gain exposure for your applications.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# Conventions Used in This Book

This book uses the following typographical conventions:

*Italic*

Used to indicate new terms, URLs, filenames, file extensions, directories, commands, options, and program names, and to highlight comments in examples. For example, a filesystem path will appear as */Applications/Utilities*.

`Constant width`

Used to show the contents of files or output from commands.

**`Constant-width bold`**

Used in examples and tables to show commands or other text that the user should type literally.

*`Constant-width italic`*

Used in examples and tables to show text that should be replaced with user-supplied values, and also to highlight comments in code.

*Menus/navigation*

Menus and their options are referred to in the text as File Open, Edit Copy, etc. Arrows will also signify a navigation path in window options-for example, System Preferences Screen Effects Activation means that you would launch System Preferences, click on the icon for the Screen Effects preferences panel, and select the Activation pane within that panel.

*Pathnames*

Pathnames show the location of a file or application in the filesystem. Directories (or folders for Mac and Windows users) are separated by a forward slash. For example, if you see something like, "...launch the Terminal application (*/Applications/Utilities*)" in the text, you'll know that the Terminal application can be found in the Utilities subfolder of the Applications folder.

`%`, `#`

The percent sign (`%`) shows the user prompt for the default *tcsh* shell; the hash mark (`#`) is the prompt for the root user.

*Menu symbols*

When looking at the menus for any application, you will see symbols associated with keyboard shortcuts for a particular command. For example, to open a document in Microsoft Word, go to the File menu and select Open (File Open), or issue the keyboard shortcut, -O.

Figure P-1 shows the symbols used in various menus to denote a shortcut.

Figure P-1. Keyboard accelerators for issuing commands

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

You'll rarely see the Control symbol used as a menu command option; it's more often used in association with mouse clicks or for working with the *tcsh* shell.

Indicates a tip, suggestion, or general note.

Indicates a warning or caution.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# How the Quick Reference Was Generated

You'd have to be a madman to write this book's quick reference by hand. Madmen we are not, so following the example of David Flanagan, author of O'Reilly's*Java in a Nutshell*, Mike wrote a program that would take care of most of the tedious work.

The idea is to attack the problem in two stages. In the first stage, the code enumerates each header file of each Framework that is to be ripped (Foundation and AppKit) and runs each line of each header through a parser. This parser would look for key elements that identify parts of the header, such as `@interface`, `+` for class methods, `-` for instance methods, and so forth. Every discovered element was assembled into a cross-linked hierarchy of framework names, class names, or method names. When all headers had been processed, the hierarchy was output into a property list file, which, at the end of the day, weighed in at just over 41,500 lines of text!

Stage two involved reading the contents of this file and running it through several formatting routines that output the XML-formatted text required by the O'Reilly production team.

Each class has a little class hierarchy figure. These figures were autogenerated by drawing into a view (using `NSBezierPath`) and saving the PDF representation of the view contents to a file. The input data for the program that did all of the drawing was the same property list used to create the API quick reference entries.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Comments and Questions

Please address comments and questions concerning this book to the publisher:

O'Reilly & Associates, Inc.
1005 Gravenstein Highway North
Sebastopol, CA 95472
800-998-9938 (in the United States or Canada)
707-829-0515 (international or local)
707-829-0104 (fax)

There is a web page for this book, which lists errata, examples, or any additional information. You can access this page at:

http://www.oreilly.com/catalog/cocoaian

To comment or ask technical questions about this book, send email to:

bookquestions@oreilly.com

For more information about books, conferences, Resource Centers, and the O'Reilly Network, see the O'Reilly web site at:

http://www.oreilly.com



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# Acknowledgments

The authors would like to acknowledge the many people who helped make this book possible.

## From Mike

Writing this book has been quite an experience, and it was made possible only by the efforts and support of the people I worked with. My editor, Chuck Toporek, put in a lot of time on this book and kept this first-time author on course and in the right frame of mind with his kind words of encouragement and level-headed advice. He has become a good friend over the past year that we've worked together on this project.

I am grateful to Duncan for his efforts in helping me shape up the book and for contributing the material on Objective-C. Duncan is quite a person to work with, and I look forward to working with him on this book in the future. Any success of this book is due in no small part to both Chuck and Duncan. These two make a great team, and I am fortunate to have the opportunity to work with them.

Thanks to the tech reviewers: Scott Anguish, Sherm Pendley, and the engineers and technical writers at Apple who were kind enough to take time out of their busy lives to review the book. Special thanks go to Malcolm Crawford for going above and beyond the call of duty by providing in-depth comments and suggestions and working closely with us to give the book its final polish. His upbeat attitude and British charm helped us all bring this book to completion.

Derrick Story at the O'Reilly Network took an amazing chance with me by letting me write about Cocoa for www.macdevcenter.com, which gave me the opportunity to get my foot in the door when I was least expecting it. Why he did this baffles me to this day, but I am grateful for it and for his encouragement over the past two years.

Ryan Dionne introduced me to Macs when we were freshman at UT Austin, and he quickly changed my attitude about them (I was a switcher before switching was fashionable). Shortly after that, John Keto of the University of Texas, my teacher and employer, was tricked, by some of the grad students I worked with, into believing that I was some sort of Linux and C guru; let's just say that I quickly became one! I suppose that if either of these things hadn't happened, you wouldn't be reading this acknowledgment. Life's funny sometimes.

All remaining thanks, and all that I am, go to my family and my friends: Mom and Dad, for the love, encouragement, and support during the whole process; my sisters Kristin and Jennifer; and my future parents-in-law, Bill and Lauren, for their love and support; Ryan, Paige, and Tommy for puttin up with me and my antisocial behaviors during the past year, and for always having an eye on me and knowing when I needed to get some lunch. As always, my love and appreciation to my fiancée, Heather, (until July 2003!) for being incredibly patient, supportive, and caring during the past year.

## From Duncan

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

I'd like to thank Mike and Chuck for letting me contributeChapter 1 to the book. They were both very patient and attentive to all of the feedback I contributed to the rest of the book, even when they must have become annoyed by all my suggestions. Chuck, you're a great editor and you've helped me develop as an author, a skill that I never thought I'd have. Mike, I'm honored to have helped you with this book, and I look forward to working with you on it again in the future.

mmalcolm Crawford provided an invaluable service by checking the Objective-C chapter, as well as the rest of the book, in detail, and he really helped shape it into the what you see today. His dinner table discussions, and plenty of red ink stemming from many years of experience, have illuminated several areas of Cocoa and Objective-C for me. This book would not be the book it is without his valuable help.

Finally, thanks to my family and friends who put up with me disappearing during the crunch time leading up to the production of this book. You guys know who you are.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Part I: Introducing Cocoa

This part of the book provides a series of chapters that provide a general overview of Cocoa, helping you to quickly come up to speed. The chapters in this part of the book include:

*Chapter 1, Objective-C*

*Chapter 2, Foundation*

*Chapter 3, The Application Kit*

*Chapter 4, Drawing and Imaging*

*Chapter 5, Text Handling*

*Chapter 6, Networking*

*Chapter 7, Interapplication Communication*

*Chapter 8, Other Frameworks*



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 1. Objective-C

Objective-C is a highly dynamic, message-based *object-oriented* language. Consisting of a small number of additions to ANSI C, Objective-C is characterized by its deferral of many decisions until runtime, supporting its key features of dynamic dispatch, dynamic typing, and dynamic loading. These features support many of the *design patterns* Cocoa uses, including delegation, notification, and Model-View-Controller (MVC). Because it is an extension of C, existing C code and libraries, including those based on C++,[1] can work with Cocoa-based applications without losing any of the effort that went into their original development.

[1] For more information on using C++ with Objective-C, see the Objective-C++ documentation contained in */Developer/Documentation/ReleaseNotes/Objective-C++.html*.

This chapter is an overview of Objective-C's most frequently used features. If you need more detail about these features or want to see the full language specification, read through Apple's document, *The Objective-C Programming Language*, which is installed as part of the Developer Tools in */Developer/Documentation/Cocoa/ObjectiveC*.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 1.1 Objects

The base unit of activity in all object-oriented languages is the *object*-an entity that associates data with operations that can be performed on that data. Objective-C provides a distinctdata type, `id`, defined as a pointer to an object's data that allows you to work with objects. An object may be declared in code as follows:

```
id anObject;
```

For all object-oriented constructs of Objective-C, including method return values,`id` replaces the default C `int` as the default return data type.

## 1.1.1 Dynamic Typing

The `id` type is completely nonrestrictive. It says very little about an object, indicating only that it is an entity in the system that can respond to messages and be queried for its behavior. This type of behavior, known as *dynamic typing*, allows the system to find the class to which the object belongs and resolve messages into method calls.

## 1.1.2 Static Typing

Objective-C also supports *static typing*, in which you declare a variable using a pointer to its class type instead of `id`, for example:

```
NSObject *object;
```

This declaration will turn on some degree of compile time checking to generate warnings when a type mismatch is made, as well as when you use methods not implemented by a class. Static typing can also clarify your intentions to other developers who have access to your source code. However, unlike other languages' use of the term, static typing in Objective-C is used only at compile time. At runtime, all objects are treated as type `id` to preserve dynamism in the system.

> There are no class-cast exceptions like those present in more strongly typed languages, such as Java. If a variable declared as a `Dog` turns out to be a `Cat`, but responds to the messages called on it at runtime, then the runtime won't complain.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 1.2 Messaging

Objects in Objective-C are largely autonomous, self-contained, opaque entities within the scope of a program. They are not passive containers for state behavior, nor data and a collection of functions that can be applied to that data. The Objective-C language reinforces this concept by allowing any *message*-a request to perform a particular action-to be passed to any object. The object is then expected to respond at runtime with appropriate behavior. In object-oriented terminology, this is called *dynamic binding*.

When an object receives a message at runtime, it can do one of three things:

- Perform the functionality requested, if it knows how.
- Forward the message to some other object that might know how to perform the action.
- Emit a warning (usually stopping program execution), stating that it doesn't know how to respond to the message.

A key feature here is that an object can forward messages that it doesn't know how to deal with to other objects. This feature is one of the significant differences between Objective-C and other object-oriented languages such as Java and C++.

Dynamic binding, as implemented in Objective-C, is different than the*late binding* provided by Java and C++. While the late binding provided by those languages does provide flexibility, it comes with strict compile-time constraints and is enforced at link time. In Objective-C, binding is performed as messages are resolved to methods and is free from constraints until that time.

## 1.2.1 Structure of a Message

Message expressions in Objective-C are enclosed in square brackets.[2]

[2] This convention is known as *infix syntax*; it is borrowed from Smalltalk.

The expression consists of the following parts: the object to which the message is sent (the receiver) the message name, and optionally any arguments. For example, the following message can be verbalized as "send a `play` message to the object identified by the `iPod` variable":

```
[iPod play];
```

Any arguments in a message expression appear after colons in a message name. For example, to tell the `iPod` object to set the volume, send it the following message:

```
[iPod  setVolume:11];
```

If a message contains multiple arguments, the arguments are typically separated in the message name and follow colons after the corresponding component of the message. For example:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
[iPod usePlaylist:@"Techno" shuffle:YES];
```

The name of this message is `usePlaylist:shuffle:`. The colons are part of the method name. If you aren't familiar with this syntax, it may appear a bit odd at first. However, experience shows that structuring messages this way helps code be more self-documenting than in languages such as Java or C++ where parameters are lumped together without appropriate labeling.

#### 1.2.1.1 Nested messages

Messages can be nested so the return value from one message can become the receiver or parameter for another. For example, to assign the playlist for an iPod to play to the value of an iTunes playlist name without an intermediate variable, use the following:

```
[iPod usePlaylist:[iTunes currentPlaylist]];
```

#### 1.2.1.2 Messaging nil

Messaging an uninitialized (or *cleared*) object variable (i.e., one with a value of `nil`) is not an error. If a message doesn't have a return value, nothing will happen. If the message returns an object pointer, it will return `nil`. If the message returns a scalar value such as an `int`, it will return `0`. Otherwise, the return value is unspecified.

### 1.2.2 How Messages Are Resolved into Methods

When a message is sent to an object, a search determines the implemented method that should be called. The logic of this search is:

1. The runtime inspects the message's target object to determine the object's class.
2. If the class contains an instance method with the same name as the message, the method is executed.
3. If the class does not have a method, the search is moved to the *superclass*. If a method with the same name as the message is found in the superclass, it is executed. This search is continued up the inheritance tree until a match is found.
4. If no match is found, the receiver object is sent the `forwardInvocation:` message. If the object implements this method, it has the dynamic ability to resolve the problem. This method's default implementation in `NSObject` simply announces (with an error) that the object doesn't handle the message.

### 1.2.3 Selectors

While user-friendly names refer to methods in source code, the runtime uses a much more efficient mechanism. At compile time, each method is given a unique value of type `SEL` called a *selector*. When the runtime performs the message dispatch described in the previous section, it resolves the

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

message to a selector, which is then used to execute the method.

You can use selectors to indicate which method should be called on an object. The following example shows how to use the `@selector` declaration to get a selector and perform its method on an object:

```
SEL playSelector = @selector(play);
[iPod performSelector:playSelector];
```

A selector identifies a method and is not associated with any particular class. Assuming that a `Child` class is defined and implements a play method, the following would be valid:

```
[aChild performSelector:playSelector];
```

Using selectors directly can be helpful when you want to execute the same action on a collection of objects. For example, a case of iPod objects, held in an array, could all be told to play by sending the following message to the array:

```
[iPodArray makeObjectsPerformSelector:playSelector];
```

You will also see selectors in the Cocoa framework used in the Target/Action paradigm. For more information about using selectors to call methods on objects, see the `NSInvocation` class documentation in Chapter 14.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 1.3 Classes

Objects in Objective-C are defined in terms of a *class*. New classes of objects are specializations of a more general class. Each new class is the accumulation of the class definitions that it inherits from and can expand on that definition by adding new methods and instance variables or redefining existing methods to perform new or expanded functionality. Like Java and Smalltalk, but unlike C++, Objective-C is a *single inheritance language*, meaning that a class can inherit functionality only from a single class.

A class is not just a blueprint for building objects; it is itself an object in the runtime that knows how to build new objects. These new objects are *instances* of the class.

## 1.3.1 The Root Class

Every class hierarchy begins with a *root class* that has no superclass. While it is possible to define your own root class in Objective-C, the classes you define should inherit, directly or indirectly, from the `NSObject` class provided by the Foundation framework. The `NSObject` class defines the behavior required for an object to be used by the Cocoa framework and provides the following functionality:

- Defines the low-level functionality needed to handle object initialization, duplication, and destruction.
- Provides mechanisms to aid Cocoa's memory management model.
- Defines functionality for an object to identify its class membership and provide a reasonable description of the object.

## 1.3.2 Defining a Class

In Objective-C, classes are defined in two parts, usually separated into two different files:

- An *interface*, which declares a class's methods and instance variables, and names its superclass The interface is usually specified in a file with the *.h* suffix typical of C header files.
- An *implementation*, which contains the code that defines the class's methods. By convention, files containing the implementation of a class have a *.m* suffix.

### 1.3.2.1 The interface

To declare a class and give all the information other classes (and other programs) need to use it, an interface file needs to contain the following information:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

- The class that is being inherited from
- The instance variables, if any, that the class adds
- A list of method declarations, if any, indicating what methods the class adds or modifies significantly

Example 1-1 shows simple header file, saved by convention as *Song.h*, containing the interface for the Song class.

### Example 1-1. A simple header file for the Song class

```
#import <Cocoa/Cocoa.h>                        // 1

@interface Song : NSObject {                   // 2
    id title;                                  // 3
}

- (id)title;                                   // 4
- (void)setTitle:(id)aTitle;                   // 5

@end;                                          // 6
```

Each line is defined as follows:

1. Imports the definitions for the Cocoa frameworks. This line is similar to the `#include` directive in C, except the compiler ensures that it doesn't include a header file more than once.
2. Declares the name of the class, `Song`, and specifies `NSObject` as its superclass.
3. Declares an instance variable named `title`. The `id` type indicates that the variable is an object. If we wanted the compiler to enforce type checking for us, we could declare its type as `NSString *`.
4. Declares an instance method named `title` that returns an object. The `-` (minus sign) before the method name indicates that the method is an instance method.
5. Declares an instance method named `setTitle` that takes an object argument and doesn't return anything.
6. The `@end;` statement indicates to the compiler the end of the `Song` class interface.

### 1.3.2.2 Scoping instance variables

The object-oriented principle of *encapsulation* means that other programmers shouldn't need to know a class's instance variables. Instead, they need to know only the messages that can be sent to a class. The inclusion of instance variables in the interface file, while required by C, would seem to break encapsulation.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

To give a class the ability to enforce encapsulation even though the variables are declared in the header file, the compiler limits the scope of the class's instance variables to the class that declares them and its subclasses. This enforcement can be changed by using the following set of compiler directives:

`@private`

These instances are accessible within the class from which they are declared. Subclasses will not be able to access them.

`@protected`

These instances are available within the class that declares them and within classes that inheri from them. This is a variable's default scope.

`@public`

These instances are available to any class and can be used by code as if they were a field in a C structure. However, the directive should not be used except when absolutely necessary, because it defeats the purpose of encapsulation.

For example, to ensure that subclasses of the `Song` class could not directly access the title instance variable, use the `@private` directive as shown in Example 1-2.

### Example 1-2. Constraining a variable's scope

```
#import <Cocoa/Cocoa.h>

@interface Song : NSObject {
@private
    id title;
}

- (id)title;
- (void)setTitle:(id)aTitle;

@end;
```

### 1.3.2.3 The implementation

To define how the class works, an implementation file needs to contain implementations of the methods defined in the interface file. Example 1-3 shows the implementation, contained in the source file *Song.m* by convention, of the `Song` class.

### Example 1-3. Implementation of the Song class

```
#import Song.h                          // 1

@implementation Song                    // 2

- (id)title {                           // 3
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    return title;
}
- (void)setTitle:(id)aTitle {            // 4
    [title autorelease];
    title = [aTitle retain];
}

@end                                     // 5
```

Here is a detailed explanation of each part of this code:

1. Imports the header file that contains the interface for the file. Every implementation must `import` its own interface.
2. Declares that what follows is the `implementation` of the `Song` class.
3. Implementation of the `title` method. This method simply returns the `title` variable's value. The contents of a method are defined, like C functions, between a pair of braces. Also, the class's instance variables are in the scope of the method and can be referred to directly.
4. Implementation of the `setTitle` method. This method sets the `title` variable to the `aTitle` argument after performing some steps, using the `retain` and `autorelease` messages required for proper memory management. For more information about memory management, see Section 1.5, later in this chapter.
5. Indicates to the compiler the end of the `Song` class implementation.

Notice that the implementation doesn't need to repeat the superclass name or the instance variable declarations.

## 1.3.3 Special Variables

In addition to a class's instance variables, several other instance variables are defined within the scope of instance methods. These variables are:

`isa`

Defined by the `NSObject` class, the `isa` variable contains a pointer to the class object. This lets an object introspect itself. It is also what lets the runtime determine what kind of object it is when it resolves messages to methods.

`self`

A variable set by the runtime to point at the object the action is performed on-the receiver object of the message. This allows the functionality within a method to send messages to the object on which the method acts.

`super`

A variable set by the runtime that behaves similarly to self, except that the resolution of message to method starts with the object's superclass. This allows you to call the functionality of superclasses.

`_cmd`

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

The selector used to call the current method.

## 1.3.4 Class Methods

Since classes are objects, you can define methods that will act when messages are sent to a class. Class methods are defined in the same way as instance methods, except you use a plus symbol (+) at the beginning of the method declaration instead of a hyphen or minus sign (-). For example, if the `Song` class keeps track of the number of songs created, a `numberOfSongs` class method could be provided, as shown in Example 1-4.

### Example 1-4. Defining a class method

```
#import <Cocoa/Cocoa.h>

@interface Song : NSObject {
    id title;
}

+ (int)numberOfSongs;
- (id)title;
- (void)setTitle:(id)aTitle;

@end;
```

Similarly, this method's implementation is placed between the `@implementation` and `@end` directives in the implementation (*.m*) file. Since a class method operates on the class object, the `isa`, `self`, `super`, and `_cmd` variables are defined the same way as instance variables.

> There is no *class variable* concept in Objective-C. However, you can achieve much the same effect by declaring a C-style `static` variable in the same file as the class implementation. This limits the scope of the variable to the *.m* file that contains it.

## 1.3.5 Overriding Superclass Methods

When a new class is defined, a method can be implemented with the same name as a method in one of the superclasses up the inheritance hierarchy. This new method overrides the original when messages with the method name are sent to the derived class's object. When overriding methods, you can access the superclass's method functionality by sending a message to the special variable `super`.

For example, if the class of `iPod` inherits from a more generic `MP3Player` class that also defines the `play` method, the subclass's `play` method may require that the superclass functionality is executed. Example 1-5 shows how this could be achieved by using the `super` variable.

### Example 1-5. Overriding a superclass method

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)play {
    [self setPlayIndicator:YES];
    [super play];
}
```

When a superclass method is overridden, the method doesn't need to be declared again in the interface (*.h*) file. By convention, an overridden method is listed in the interface file only if you significantly change the way the method works.

Even though you can override methods of a superclass, you cannot override an inherited variable by declaring a new one with the same name. The compiler will complain if you try.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 1.4 Creating Object Instances

One of the principal functions of a class object is to serve as a factory for creating new instances. When new objects are created, memory is allocated and its instance variables are initialized. This is accomplished by using the `alloc` method, defined by the `NSObject` class, as follows:

```
Song song = [song alloc];
```

The `alloc` class method dynamically allocates memory, sets the `isa` variable to a pointer to the class's class object, sets all other variables to 0, and then returns the new object instance. This takes care of the system level tasks that need to be performed when an object is created, but doesn't allow the object to properly initialize itself. To give an opportunity for object-specific initialization, the `NSObject` class provides the `init` instance method. To fully create an instance of the `Song` class, use the following code:

```
Song song = [[song alloc] init];
```

The `init` method can be overridden in a subclass to assign defaults to instance variables and to take care of other tasks that need to be performed before an object is used.

> You can call the `alloc` and `init` methods by using separate lines of code. However, since object allocation and initialization are interlinked, calling both methods with one line of code is good practice.

When you override the `init` method, the superclass's `init` method (or designated initializer, as covered in the next section) should always be called to ensure that the superclass is initialized properly. Initialization methods should also return `self`, the object being initialized. Example 1-6 shows an `init` method for the `Song` class.

### Example 1-6. An initialization method for the Song class

```
- (id)init {                                    // 1
    self = [super init];                        // 2
    // ... Song-specific initialization code
    return self;                                // 3
}
```

The code shown in Example 1-6 performs the following tasks:

1. Declares the `init` method, which returns an object of type `id`. The returned object is the newly initialized object.
2. Calls the `init` method of the superclass (`super`) to let it properly configure its state. The `self` variable is set to the return value of the `init` method because it might return a different

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

instance than the one currently being worked with.

3. Returns the object using the `self` variable.

Initialization methods return an object of type `id` so an initialization method can actually return a different object of a different type, if necessary. For example, if a class needs to return a more specialized subtype to better take advantage of a system's runtime configuration, it can release the object originally created, create a new one of the subtype, and return it. This is why programs need to use the object returned by the `init` method and not the object returned by the `alloc` method, and why you should make sure that `self` is set to the `init` method's return value.

The ability for an initialization method to return a subtype allows for a programming pattern known as *class clusters*. This allows for a large amount of functionality to be exposed behind a small and easy to understand public class definition. For example, there are many different string classes that are represented by the public `NSString` class.

## 1.4.1 Designated initializers

A class can provide multiple initialization methods to allow varying levels of customization. When you have multiple initializers, only the *designated initializer* should call the superclass' initializer method. All other initializers must call the designated initializer. This will ensure that your classes always behave properly.

For example, if an `initWithTitle:` method is defined for the `Song` class, the more general `init` method would first need to be called to allow proper initialization of both the `Song` class and its parent classes before proceeding with specific initialization. Example 1-7 shows an example.

### Example 1-7. Calling a designated initializer

```
-(id)initWithTitle:(NSString *)aTitle {
    self = [self init];
    [self setTitle:aTitle];
    return self;
}
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 1.5 Memory Management

To properly manage memory, Cocoa provides a *reference counting* mechanism, supported by the `NSObject` and `NSAutoreleasePool` classes. As its name suggests, reference counting maintains a count of how many references there are to an object-indicating how many other objects are interested in keeping the object around. Reference counting is not automatic; the compiler has no way to determine an object's lifetime. Therefore, the following `NSObject` reference counting methods must be called to indicate the level of interest in an object to the memory management system:

`retain`

Increments the object's reference count by `1`. When you want to register interest in an object that you did not create or copy, indicate interest in it by calling this method.

`release`

Decrements the object's reference count by `1`. This message is sent to objects created with the `alloc` method or sent a `retain` message when you are no longer interested in using them. If this causes the retain count to reach `0`, the runtime deallocates the object.

`autorelease`

Adds the object to the current *autorelease pool*. This allows you to release your interest in an object without immediately causing the retain count to reach `0`. When the autorelease pool is itself released, it sends the `release` message to every object it contains. This is most useful when you want to pass the object to another object as a return value and won't have the opportunity to release the object later by yourself.

The following set of rules will help you perform accurate reference counting and avoid either leaking memory or prematurely destroying objects:

- Objects created by `alloc` or `copy` have a retain count of `1`.
- If you want to keep an object received from another mechanism, send it a `retain` message.
- When you are done with an object created by `alloc` or `copy`, or retained by the `retain` message, send it a `release` message.
- When you add an object to a collection, such as an array or dictionary (described in Chapter 2), the collection retains it. You are no longer responsible for the object, and you may safely release any interest in it.
- If you need to release interest in an object but need to ensure that it is not immediately destroyed, send an `autorelease` message so the object is put in the autorelease pool for later release.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



Once you have released interest in an object, you shouldn't send any messages to it. If an object is deallocated because its retain count reached `0`, sending a message to the object will cause an error.

## 1.5.1 Retaining Objects in Accessor Methods

Accessor methods require a bit of caution, especially those where an object's instance variables are set. Because an object passed to a set method may already be held, you must be careful about how memory management is performed. Releasing an object before retaining it can lead to unfortunate side effects and can be the source of much frustration. To ensure that memory management is performed correctly, send the `autorelease` method to an old object reference before replacing it with a new reference. Example 1-8 shows how this rule is applied in the `Song` class's `setTitle:` method.

### Example 1-8. Memory management in accessor methods

```
- (void)setTitle:(NSString *)aTitle {
    [title autorelease];
    title = [aTitle retain];
}
```

Another way to ensure proper memory management and further increase encapsulation is to make a copy of the parameter, as shown in Example 1-9. This ensures that even if a mutable subtype of `NSString` were given, any modifications to that parameter would not change the contents of the `title` variable.

### Example 1-9. Copying a parameter to enforce encapsulation

```
- (void)setTitle:(NSString *)aTitle {
    [title autorelease];
    title = [newTitle copy];
}
```

These practices ensure proper memory management in almost all situations you are likely to encounter. However, some fringe cases require care in handling. For more details,see http://www.stepwise.com/Articles/Technical/2002-06-11.01.html.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 1.6 Deallocating Objects

When an object is ready to be destroyed (as determined by the reference counting mechanism), the system will give the object an opportunity to clean up after itself by calling the `dealloc` method defined by `NSObject`. If the object has created or retained any other objects' reference by its instance variables, it must implement this method and perform the appropriate tasks to maintain integrity of the reference counting system.

In Example 1-8, the `Song` class retains the `title` instance variable in the `setTitle:` method. To properly implement memory management, you need to balance this retain with a release. Example 1-10 shows the release performed in the `Song` class's `dealloc` method.

### Example 1-10. Implementing a dealloc method

```
- (void)dealloc {
    [title release];
    [super dealloc];
}
```

This provides proper balance in the reference counting mechanism.

> You should never call the `dealloc` method yourself. Always let the memory management methods do it.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 1.7 Categories

Inheritance is not the only way to add functionality to a class. With an Objective-C language construct called a *category*, you can add methods to an existing class, thereby extending its functionality-and the functionality of its subclasses.

A category interface declaration looks like a class interface declaration, with one exception: the category name is listed in parentheses after the class name, and the superclass is not mentioned. Fo example, if you wanted to add a `rot13` method to the `NSString` class to get the `rot13` version of any string, the category interface would be defined as shown in Example 1-11.

### Example 1-11. Defining a category interface

```
#import "NSString.h"

@interface NSString (Obfuscation)

- (NSString *)rot13;

@end
```

The category's implementation looks like the implementation of a class itself. Example 1-12 shows an interface implementation.

### Example 1-12. Implementation of a category

```
#import "Obfuscation.h"

@implementation NSString (Obfuscation)

- (NSString *)rot13 {
    NSString * rot13string;

    // Perform logic to shift each character by 13
    return rot13string;
}

@end
```

Remember that a category can't declare new instance variables for a class; it can only add methods to an existing class.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



A category is not a substitute for a subclass. You should not redefine methods already in a class or a class's superclass-add only new methods to the class.

## 1.7.1 Protocols

Class and category interfaces define the methods that belong to a particular class. However, you might want many different classes, otherwise unrelated to one another, to perform the same set of methods. Objective-C does not support multiple inheritance, but because of the language's dynamic nature, its support for *protocols* (declaration of a group of methods under a name) fills the need. A protocol defines the methods that a class is expected to implement in order to function appropriately while leaving the implementation of those methods to the class.

Like classes and categories, protocols are defined in interface header (*.h*) files. To define a set of methods that apply to objects controlled by a media player, define the protocol as shown in Example 1-13.

### Example 1-13. Defining a protocol

```
@protocol Playable
- (void)play;
- (void)stop;
@end
```

A class adopts a protocol by listing the protocols in the file's interface declaration. Example 1-14 shows the syntax used in the interface declaration to indicate that the `Song` class conforms to the `Playable` protocol.

### Example 1-14. Conforming to a protocol in a class interface

```
#import <Cocoa/Cocoa.h>
#import "Playable.h"

@interface Song : NSObject <Playable> {
    id title;
}

- (id)title;
- (void)setTitle:(id)aTitle;

@end;
```

A class or category that adopts a protocol must implement all methods defined by that protocol. The compiler issues a warning if this requirement is not satisfied. Additionally, you can check whether or not objects conform to a particular protocol. If a media player wants to make sure that the `Song` class conforms to the `Playable` protocol, the check in Example 1-15 could be used.

### Example 1-15. Checking to see if an object conforms to a protocol

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
if([song conformsTo:@protocol(Playable)]) {
    [song play];
} else {
    // Issue a warning or do something else reasonable here
}
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 1.8 Naming Conventions

Several naming conventions have become widespread within the Objective-C community. To create code that your peers can maintain more easily, try to use the following conventions:

- Always capitalize class names.
- Begin variable and method names with lowercase letters. If a variable or method name consists of multiple words, capitalize the first letter of the second and any following words. This practice is known as *camelcase*.
- Begin accessor methods that set an instance variable value with the word "set," and make sure the instance variable name follows in camelcase.
- Give accessor methods that return the value of an instance variable the same name as the variable. It is also acceptable-though uncommon-to prefix the variable name with the word "get" and have the instance variable name follow in camelcase.
- Do not begin method names that you create with an underscore. By convention, Apple uses underscores to implement system level private functionality.

We've implemented these conventions throughout the book.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# Chapter 2. Foundation

The Foundation framework provides support for a variety of basic functionalities and data types, including the following:

- Strings, numbers, and collections
- Dates and time
- Binary data
- Means of working with files, including accessing data and working with bundles
- Distributed event notification
- Operating system interaction
- Threading

This chapter discusses these subjects and provides several short examples that demonstrate of the most common methods of the key classes.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 2.1 Data

The Foundation framework provides many classes and protocols that extend the capabilities of the Obje language to represent and work with basic data types, such as strings and numbers, in an object-oriente fashion. Additionally, the Foundation framework provides*application programming interfaces* (APIs) for w with more complex data types, such as dates and collections.

## 2.1.1 Immutable Versus Mutable Classes

Classes such as `NSString` and `NSArray` are *immutable* classes; instances of these classes cannot be alte after they are initialized. Each immutable class, however, has a*mutable* subclass: for example, `NSString` the mutable subclass `NSMutableString` , and `NSArray` has the subclass `NSMutableArray` . Mutable subcl extend their superclass's functionality to allow modification after initialization. Immutable classes are mo efficient, but mutable classes are more flexible.

## 2.1.2 Basic Types

Two of the most basic data types in an application are *strings* and *numbers* . The Foundation framework provides object abstractions in the form of `NSString` and `NSNumber` , and an extensive API to manipulate

### 2.1.2.1 Strings

Foundation's primary class used to represent and manipulate strings is `NSString` . Instances of `NSString` be considered, at their core, an immutable array of Unicode characters, and can represent characters fro alphabets of nearly every written language, past and present. In fact, `NSString` is a class cluster, which the developer from a number of underlying implementation details that make string handling more effici This abstraction is generally relevant only when subclassing `NSString` , so it will not be considered furthe here.

Objective-C provides a syntax shortcut to create strings in code that is of the form `@"... "`. In code, this like:

```
NSString *str = @"Hello";
```

When interpreted by the compiler, this syntax translates into an `NSString` object that is initialized with th ASCII encoded string between the quotes. This string object is created at compile-time and exists for th the application. While you may send `retain` and `release` messages to an `NSString` object created from literal syntax, such an object will never be deallocated. Example 2-1 shows several `NSString` methods. F more information on using `printf` -style formatting, see */Developer/Documentation/Cocoa/TasksAndConcepts/ProgrammingTopics/DataFormatting/iFormatString* .

Example 2-1. Creating instances of, and working with, NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// The literal syntax for an NSString object
NSString *str = @"Hello";

// Create one string from another string
NSString *str2 = [NSString stringWithString:str];

// You can also create a string using printf style formatting
str = [NSString stringWithFormat:@"%d potatoes", 10];

// The contents of a text file may be used to initialize a string
str = [NSString stringWithContentsOfFile:@"/path/to/file"];

// C character arrays may be used to create a string as well
char *cStr = "Hello again";
str = [NSString stringWithCString:cStr];

// How to get a C string from an NSString
char cStr = [str UTFString];

// Determine the length of a string, which is a count of the
// number of Unicode characters in the string
unsigned int strLength = [str length];

// Append one NSString to another
// str2 = "Hello, World!"
str2 = [str stringByAppendingString:@", World!"];

// Append a format to an NSString
// str3 = "Hello, World! 2003"
NSString *str3 = [str2 stringByAppendingFormat:@" %d", 2003];

// Extract substrings; returns characters 6 to the end
// subStr = @"World! 2003"
NSString *subStr = [str3 substringFromIndex7];

// Returns characters from beginning to character 5
// subStr = @"Hello"
subStr = [str3 substringToIndex:5];

// Returns 6 characters starting at index 7;
// Also see the comment that accompanies NSRange
// subStr = @"World!"
subStr = [str3 substringWithRange:NSMakeRange(7, 6)];

// Case conversion; returns capitalization: "Hello, World"
NSString *firstcaps = [str2 capitalizedString];

// Case conversion; returns lowercase: "hello, world!"
NSString *lower = [str2 lowercaseString];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Case conversion; returns uppercase: "HELLO, WORLD!"
NSString *upper = [str2 uppercaseString];

// Searching for substrings; returns NSRange {0, 2}
NSRange loc = [str2 rangeOfString:@"He"];

// Searching for substrings; returns NSRange {NSNotFound, 0}
loc = [str2 rangeOfString:@"and"];

// Checking whether a string is a prefix or suffix of another
BOOL r = [str2 hasPrefix:@"Hello, W"];    // Returns YES
BOOL r = [str2 hasSuffix:@"What?"];       // Returns NO
```

NSRange is a Foundation data type used to specify a portion of a series. NSRange is defined as:

```
typedef struct _NSRange {
    unsigned int location;
    unsigned int length;
} NSRange;
```

The location is the starting index of the portion, and the length is the number of elements of the series in the range. Methods that return NSRange s set the location of the range to NSNotFound to indicate an invalid range in the context of the operation.

To initialize an NSString from Unicode characters, first assemble a C array of the Unicode character cod which are of the type unichar . Example 2-2 shows how to use hexadecimal character codes to specify t Unicode characters for the string "α β γ δ ":

## Example 2-2. Working with Unicode strings and NSString objects

```
// Create the unichar string "αβγδ "
unichar uc[5] = {0x03b1, 0x03b2, 0x03b3, 0x03b4, 0x03b5};

// Initialize an NSString with a Unicode string
NSString *uStr = [NSString stringWithCharacters:&uc length:5];

// Copy the Unicode characters into a buffer
unichar uc2[5] = [uStr characterAtIndex:0];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

The entire Unicode character set catalog is available at http://www.unicode.org. This site offers a way for you to find the hexadecimal code for any character. In addition, Ma OS X also provides the Character Palette utility, found in the Input Menu, which can be used to look up character codes of any Unicode character. In Example 2-2, the Unicode characters were specified by their hexadecimal code because the default text encoding of source files (*Mac OS Roman* or another 8-bit encoding) doesn't allow direct representation of Unicode characters. However, Project Builder lets you specify *Unicode (UTF-16 and UTF-8)* as the text encoding for a source file, which would let you enter the Unicode characters directly into source strings with the Character Palette. The file encoding is specified globally in the Project Builder preferences, or on a per-file basis in the file's Project Builder info panel.

`NSString` includes a method used to break a string apart into components, based on a given separator character or string. This might be useful if you need to parse a record line from a text file whose fields a delimited by a character or string. Example 2-3 shows how this works for a string with colon-separated f

## Example 2-3. Breaking a string up into its components

```
// A sample record from some record set
NSString *rec = @"John:Doe:Austin:TX:etc";

// Break the string into components separated by colons
// Returns the array {John, Doe, Austin, TX, etc}
NSArray *fields = [str componentsSeperatedByString:@":"];

// NSArray can be used to rejoin the components into one string
// Returns "John*Doe*Austin*TX*etc"
NSString *rec2 = [fields componentsJoinedByString:@"*"];
```

`NSMutableString` extends `NSString` 's functionality to support in-place modification. This additional flex provided at the expense of decreased efficiency. Example 2-4 illustrates several commonly used method `NSMutableString` .

## Example 2-4. Using NSMutableString

```
// Create a mutable string from an immutable string
NSString *str = @"Hello, World";
NSMutableString *ms = [NSMutableString stringWithString:str];

// Append one string to another, ms is now "Hello, World!"
[ms appendString:@"!"];

// Insert strings within a string
// ms is now "He_garbage_llo, World!"
[ms insertString:@"_garbage_" atIndex:2];

// Delete part of a string, ms is now "Hello, World!"
[ms deleteCharactersInRange:NSMakeRange(2,9)];

// Replace part of a string with another string
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// ms is now "Hello, World."
[ms  replaceCharactersInRange:NSMakeRange(12,1)  withString:@"."];

// Replace the contents of a string with another string
[ms setString:@"That's all for now."];
```

### 2.1.2.2 Comparing strings

`NSString` provides several methods for comparing strings and testing equality. `NSObject` declares the m
`isEqual` : to test general object equality. This method works with `NSString` objects, but the `NSString` m
`isEqualToString` : more efficiently tests the equality of two objects known to be strings. Using it returr
the `id` s of the two strings are equal (which implies that the variables point to the same object) or if the
of a lexical comparison between the strings is `NSOrderedSame` .

A comparison that determines the lexical ordering of two strings is carried out with any of several metho
each of which provides varying degrees of control over the scope of the comparison. The method that pı
the greatest amount of control is `compare:options:range` :. The `options` : argument takes one or both
following two constants (both can be used with the C bitwise OR operator, `|` ):

`NSCaseInsensitiveSearch`

Makes the comparison case insensitive.

`NSLiteralSearch`

Compares the two strings on a byte-by-byte, rather than character-by-character, basis. This comp
can improve speed for some operations, but differing literal sequences may not match when they
otherwise would. For example, accented characters may be represented by a composite character
`é` ), or a combined sequence of two Unicode characters (e.g., `e` and ´ ).

The `range` : argument restricts the comparison to a substring of the receiver. If you want to compare or
first two string characters, specify an `NSRange` of `(0,2)` in the `range` : argument.

Two other related methods are `compare:options` : and `compare` :. The first method passes `options` : to
`compare:options:range` : and makes the range equal to the entire length of the receiver. The second,
`compare` :, passes no options, and again uses the full extent of the receiver as the range. Example 2-5 sh
different ways to compare strings.

Example 2-5. Comparing strings

```
NSString *a = @"Right";

// Test for equality; returns YES
BOOL v = [a isEqualToString:@"Right"];

// Determine lexical order of two strings; returns NSOrderedSame
NSComparisonResult r = [a compare:@"Right"];

// Returns NSOrderedDescending; light comes before Right
r = [a compare:@"light"];

// Returns NSOrderedAscending; sight comes after Right
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
r = [a compare:@"sight"];

// Literal, case-insensitive comparison by setting options
r = [a compare:@"right"
       options:NSCaseInsensitiveSearch | NSLiteralSearch];

// Easier case-insensitive comparison; returns NSOrderedSame
r = [@"next" caseInsensitiveCompare:@"NeXT"];
```

### 2.1.2.3 Attributed strings

`NSAttributedString` provides an API for text strings that contain information about graphicalattributes text, such as its font, color, size, and kerning. Attributes can be applied to individual characters, ranges characters, or to the entire length of the string. Like `NSString` , `NSAttributedString` is an immutable c with a mutable subclass, `NSMutableAttributeString` .

The functionality of `NSAttributedString` as it exists in the Foundation framework is fairly basic. Founda functionality is limited to keeping track of the string contents, as well as the various sets of attributes th apply to different ranges of the string. The Application Kit provides most functionality of `NSAttributedSt` related to drawing and displaying text, and is covered more in Chapter 3 and Chapter 4 .

### 2.1.2.4 Working with strings: character sets and scanners

In addition to a rich abstraction for strings, Foundation includes two classes that support string processir `NSScanner` and `NSCharacterSet` .

### 2.1.2.5 NSCharacterSet

An `NSCharacterSet` represents a collection of Unicode characters. A number of sets are predefined and accessible through class methods, including:

- `alphanumericCharacterSet`
- `capitalizedLetterCharacterSet`
- `controlCharacterSet`
- `decimalDigitCharacterSet`
- `letterCharacterSet`
- `punctuationCharacterSet`
- `whitespaceAndNewlineCharacterSet`
- `whitespaceCharacterSet`

You can also create a new character set from a string, using `characterSetWithCharactersInString` :, a set from a file with `characterSetWithContentsOfFile` :, or invert an existing set with `invertedSet` :.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSCharacterSet 's mutable subclass, NSMutableCharacterSet , allows you to, amongst other modificat add or remove string characters to or from a set and form a union or intersection with another set. Muta character sets are, however, less efficient than immutable character sets. If you do not need to change character set after establishing it, create an immutable copy withcopy , and use that.

You would typically use NSCharacterSet s to group characters, to let you find part of a particular set wh searching an NSString object. You might use NString 's rangeOfCharacterFromSet:options:range : method (or a variant thereof) to find the range in the receiver of the first (or in the case of a backwards search, last) character found from the set argument. NSCharacterSets are also used extensively with NSScanner .

### 2.1.2.6 NSScanner

An NSScanner object lets you search an NSString object for string and number values, with options for scanning up to or past characters from a given set or string. You would usually initialize a scanner with t string to scan, using scannerWithString : or initWithString . You can configure it to be case-sensitiv not, with setCaseSensitive; establish a starting point with setScanLocation :; or set its locale with setLocale :. A scanner's locale affects the way it interprets values from the string. In particular, a scan uses the locale's decimal separator to distinguish the integer and fractional parts of floating-point representations.

After it is configured, a scanner can read numeric values from its string into a variable, using methods su scanInt :, scanFloat :, and scanDecimal : (the first two methods read scalars; scanDecimal : creates NSDecimalNumber object). You can search for particular strings or characters by using any of the followi methods:

- scanString:intoString :
- scanUpToString:intoString :
- scanCharactersFromSet:intoString :
- scanUpToCharactersFromSet:intoString :

All of these methods return a Boolean value to indicate the operation's success. Pass a pointer to the va as the argument to these methods, or pass nil to skip a value. Finally, check whether you have reachec end of the input string with the isAtEnd method. For example, assume a file, *~/scannerTest.txt* , of the f

```
EmpId: 7830480 FirstName: Jo LastName: Wong
EmpId: 67567456 FirstName: Toni LastName: Jones
EmpId: 546776 FirstName: Dylan LastName: Blimp
```

Example 2-6 shows how the file may be parsed with NSScanner .

#### Example 2-6. Using NSScanner and NSCharacterSet

```
NSCharacterSet * letterSet , *whiteSet;
letterSet = [NSCharacterSet letterCharacterSet];
whiteSet = [NSCharacterSet whitespaceAndNewlineCharacterSet];

NSString *filePath, *fileString;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSScanner *scanner;

filePath = [@"~/scannerTest.txt" stringByExpandingTildeInPath];

fileString = [NSString stringWithContentsOfFile:filePath];

scanner = [NSScanner scannerWithString:fileString];

while ( ![scanner isAtEnd] )  {
  NSString *fName, *lName;
  int empId;

  if ( [scanner scanString:@"EmpId: " intoString:nil] ) {

    [scanner scanInt:&empId];

    [scanner scanString:@"FirstName: " intoString:nil];
    [scanner scanCharactersFromSet:letterSet intoString:&fName];

    [scanner scanString:@"LastName: " intoString:nil];
    [scanner scanCharactersFromSet:letterSet intoString:&lName];

    NSLog(@"%@ %@, EmpID: %d", fName, lName, empId);

    [scanner scanCharactersFromSet:whiteSet intoString:nil];
  }
}
```

The code in Example 2-6 produces the following output:

```
Jo Wong, EmpID: 7830480
Toni Jones, EmpID: 67567456
Dylan Blimp, EmpID: 546776
```

### 2.1.2.7 Numbers

For many numerical operations dealing with calculations, using C's primitive numerical data types is the
and most efficient way to represent numerical data. However, you might need to treat a number as an c
to store it in a collection or to store a number in the user defaults database. For such situations, the Fou
framework provides the class `NSNumber` , which is an Objective-C wrapper class for the standard numeric
types in C. You can initialize instances of `NSNumber` with a scalar and retrieve a scalar value from a numb
object. Example 2-7 shows many of the methods used to work with `NSNumber` s.

#### Example 2-7. Working with NSNumber

```
// NSNumbers can contain any primitive C type
NSNumber *iN = [NSNumber numberWithInt:1];
NSNumber *fN = [NSNumber numberWithFloat:50.5f];
NSNumber *dN = [NSNumber numberWithDouble:100.45];
NSNumber *cN = [NSNumber numberWithChar:100];
NSNumber *lN = [NSNumber numberWithLong:100];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSNumber *usN = [NSNumber numberWithUnsignedShort:30];

// Access the value of an NSNumber object
int i = [iN intValue];                          // Returns 1
float f = [fN floatValue];                      // Returns 50.5
double d = [dN doubleValue];                    // Returns 100.45
char c = [cN charValue];                        // Returns 100
long l = [lN longValue];                        // Returns 100
unsigned short us = [usN unsignedShortValue];   // Returns 30

// Test for equality of two numbers; returns YES
BOOL b = [nc isEqualToNumber:nl];

// Determine how one number compares to another in order
NSComparisonResult r = [nc compare:nus];        // NSOrderedDescending
r = [nus compare:ns];                           // NSOrderedAscending
```

`NSDecimalNumber` extends the capabilities of `NSNumber` with APIs to perform base-10 arithmetic, and it provides methods to initialize an instance in terms of the number's basic components. Example 2-8 shows to work with `NSDecimalNumber` .

## Example 2-8. Working with NSDecimalNumber

```
// Planck's Constant (1.04e-34)
NSDecimalNumber *h = [NSDecimalNumber
                          decimalNumberWithManitssa:104
                          exponent:-36
                          isNegative:NO];

// NSDecimalNumber has methods for returning commonly used numbers
NSDecimalNumber *one = [NSDecimalNumber one];        // 1.0
NSDecimalNumber *zero = [NSDecimalNumber zero];      // 0.0

// NSNumbers that represent system limits
NSDecimalNumber *max = [NSDecimalNumber maximumDecimalNumber];
NSDecimalNumber *min = [NSDecimalNumber minimumDecimalNumber];

// Methods to operate on the numbers
NSDecimalNumber *n;
n = [one decimalNumberByAdding:zero];          // n = 1.0
n = [one decimalNumberBySubtracting:zero];     // n = 1.0
n = [h decimalNumberByMultiplyingBy:c];        // n = 3.16e-26
n = [h decimalNumberByDividingBy:one];         // n = 1.05e-34
n = [c decimalNumberByRaisingToThePower:2];     // n = 9.0e16
```

Each method has corresponding methods that let you determine how to handle rounding and errors (typ by using instances of `NSDecimalNumberHandler` ), which is known as the number's *behavior* . Numbers r to the nearest integer by default; an exception is raised if there is division by zero, or if the result of a calculation exceeds the maximum or minimum numbers that can be represented.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

## 2.1.3 Collections

The Foundation framework offers several important classes for creating and manipulating collections of o
The primary collection classes are `NSArray` , `NSDictionary` , and `NSSet` :

`NSArray`

Stores an ordered, immutable collection of objects, where each member is referenced by its index number. Any given object may appear in an array more than once.

`NSSet`

Stores an immutable, unordered collection of unique objects, which support the mathematical idea set. `NSSet` objects are useful when your collection requires you to test an object for membership; N provides a more efficient implementation for testing object membership over that of other collecti classes.

`NSDictionary`

Stores a collection of objects as key-value pairs; each member has an associated key that identifi member object.

Each class has subclasses that extend their interfaces to provide mutability.

### 2.1.3.1 Arrays

Instances of `NSArray` represent an ordered collection objects. An index number identifies each member in the array; indexing begins at zero, just as in C arrays. Example 2-9 gives an overview of `NSArray` 's capabilities.

Example 2-9. Creating and working with NSArray objects

```
// Create an array from several objects
// Objects are separated by commas, and the list must end with nil
NSArray *a = [NSArray arrayWithObjects:@"Hello",@"how",@"are", @"you",nil];

// If you need an array with one object
NSArray *b = [NSArray arrayWithObject:@"One object"];

// Create an array from the contents of an XML property list
b = [NSArray arrayWithContentsOfFile:@"/path/to/plist"];

// Test arrays for equality
BOOL r = [a isEqualToArray:b];                // Returns NO

// Determine the number of memebers in a collection
int n = [a count];                            // Returns 4

// Access elements of the array
NSString *one = [a objectAtIndex:0];          // Returns @"Hello"
NSString *end = [a lastObject];               // Returns @"you"
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Discover the index of an object
unsigned idx = [a indexOfObject:@"how"];     // Returns 1

// Find out if an array contains some object
BOOL result = [a containsObject:@"today"];           // Returns NO

// Obtain a new array by adding an object
NSArray *newA = [a arrayByAddingObject:@"today"];

// Extract subarrays
NSArray *subA = [a subarrayWithRange:NSMakeRange(1,2)];
```

NSMutableArray extends NSArray by adding support for arrays whose contents can be changed after th initialization. Example 2-10 shows how a small set of the mutability methods works.

Example 2-10. A sampling of NSMutableArray methods

```
// Create a mutable array from an immutable array
NSMutableArray *ma = [NSMutableArray arrayWithArray:a];

// Create an empty mutable array
NSMutableArray *ma = [NSMutableArray array];

// Exercise mutability
[ma addObject:@"World"];                    // ma is {World}
[ma insertObject:@"Hello" atIndex:0];        // ma is {Hello, World}
[ma removeObjectAtIndex:0];                          // ma is {World}
[ma removeLastObject];                      // ma is {}
```

### 2.1.3.2 Sets

NSSet declares an interface to unordered collections of unique objects. The Foundation framework imple two subclasses of NSSet : NSMutableSet and NSSCountedSet , which is a child class of NSMutableSet . L arrays and dictionaries, the contents of a set can be any Objective-C object. Example 2-11 shows how to NSSet .

Example 2-11. Using NSSet

```
// Create a set from the contents of an array
NSSet *set1 = [NSSet setWithArray:anArray];

// Create a set from arbitrary objects
set1 = [NSSet setWithObjects:@"a", @"b", @"c",@"d", nil];

// Create a set from a single object
NSSet *set2 = [NSSet setWithObject:@"a"];

// Determine the size of the set
unsigned int n = [set1 count];               // Returns 4
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Access set members; creates an NSArray from the set contents
NSArray *setObjs = [set1 allObjects];

// You can have a set randomly (essentially) return a member
id object = [set1 anyObject];

// Test for membership, the strength of NSSet; returns YES
BOOL b = [set1 containsObject:@"a"];
b = [set1 containsObject:@"z"];                // Returns NO
id mem = [set1 member:@"a"];                   // Returns @"a"
id mem = [set1 member:@"z"];                   // Returns nil

// Compare two sets
NSSet *set3 = [NSSet setWithObjects:@"c", @"d", @"e", @"f", nil];
BOOL b = [set2 isSubsetOf:set1];               // Returns YES
b = [set2 intersectsSet:set1];                 // Returns YES
b = [set3 intersectsSet:set1];                 // Returns NO
b = [set1 isEqualToSet:set2];                  // Returns NO
```

Example 2-12 shows what `NSMutableSet` adds to `NSSet` .

## Example 2-12. Methods provided by NSMutableSet

```
// Add and remove member objects
[set1 addObject:@"e"];                 // set1 now [a, b, c, d, e]
[set1 removeObject:@"a"];              // set1 now [b, c, d, e]
[set2 removeAllObjects];               // set1 now []

// Combine sets
[set1 unionSet:set3];                  // set1 now [b, c, d, e, f]
[set1 minusSet:set3];                  // set1 now [b]
[set1 intersectSet:set3];              // set1 now []
[set1 setSet:set3];                    // set1 now [c, d, e, f]
```

`NSCountedSet` is based on a slightly different idea of a set than its superclasses. In a standard set, each member object must be unique. Counted sets remove the constraint on uniqueness, making it possible t an object to a counted set more than once. However, a counted set does not keep multiple references to object; rather, it keeps a count of the number of times an object was added to the set. Whenever an ob added to the set of which it is already a member, the count for that object is incremented. When an obj removed from a counted set, its count is decremented until it reaches zero, at which point the object is longer a member of the set. The code in Example 2-13demonstrates the functionality added by `NSCount` .

## Example 2-13. Methods provided by NSCountedSet

```
// Add and remove objects; inherits methods from NSMutableSet
[set3 addObject:@"b"];                 // set3 now [b, c, d, e, f]
[set3 addObject:@"b"];                 // Increments count for b to 2
[set3 addObject:@"b"];                 // Count for b now 3
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
[set3 countForObject:@"b"];          // Returns 3
[set3  removeObject:@"b"];
[set3 countForObject:@"b"];          // Returns 2
```

### 2.1.3.3 Dictionaries

Cocoa dictionaries provide a collection class that implements the idea of key-value pairs. In a dictionary, member objects are associated with a unique identifier key, used to identify and access the object. Altho keys are typically `NSString` objects, both keys and values may be of any class. Example 2-14summarize several commonly used methods of `NSDictionary` .

Example 2-14. Working with NSDictionary

```
// Create an empty dictionary, useful for
// creating empty mutable dictionaries
NSDictionary *d = [NSDictionary dictionary];

// Initialize a dictionary with contents of an XML property list
d = [NSDictionary dictionaryWithContentsOfFile:@"pList"];

// Create a dictionary from one object with a key
d = [NSDictionary dictionaryWithObject:@"a" forKey:@"A"];

// Create a dictionary with many objects and keys
d = [NSDictionary dictionaryWithObjects:@"a", @"b", nil
                                forKeys:@"A", @"B", nil];

// Count the number of objects in the dictionary;
int n = [d count];                              // Returns 2

// Access objects and keys;
id obj = [d objectForKey:@"A"];                 // Returns "a"

// Returns nil since "a" is not a valid key
obj = [d objectForKey:@"a"];

// Returns an array whose members are the keys of the receiver
NSArray *k = [d allKeys];

// Returns an array with the dictionary's objects
NSArray *v = [d allValues];

// Returns an enumerator for the receiver's keys
NSEnumerator *e = [d keyEnumerator];

// Returns enumerator for objects in dictionary
e = [d objectEnumerator];

// Write contents of dictionary to a file formatted
// as an XML property list
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
[d writeToFile:@"/path/to/file" atomically:YES];
```

Example 2-15 shows how to work with mutable dictionaries.

### Example 2-15. Working with NSMutableDictionary

```
// Create a mutable dictionary from an immutable dictionary
NSMutableDictionary *md;
md = [NSMutableDictionary dictionaryFromDictionary:d];

// Add a key-value pair
[md setObject:@"c" forKey:@"C"];

// Remove an object from the dictionary
[md removeObjectForKey:@"A"];

// You can also remove all objects in one fell swoop
[md removeAllObjects];

// Finally, replace the current contents with the
// contents of another dictionary
[md setDictionary:d];
```

#### 2.1.3.4 Enumerators

Traditionally, a for-loop is used to enumerate the contents of acollection, which provides access to each member by its index. Since the for-loop technique depends on indexed collection contents, it won't work non-indexed collections, such as sets and dictionaries.`NSEnumerator` provides an object-oriented way of iterating over the contents of any collection. Each Foundation collection type implements the method `objectEnumerator` , which returns an enumerator for the receiver.

To illustrate how `NSEnumerator` is used in place of the for-loop, consider Examples Example 2-16and Exa 2-17 . Example 2-16 shows how an array is traditionally enumerated using a for-loop.

### Example 2-16. Using a for-loop to enumerate an array's contents

```
// Assume NSArray *array exists
int i;
id object;

for ( i = 0; i < [array count]; i++ ) {
    object = [array objectAtIndex:i];

    // Do something with the object
}
```

Example 2-17 shows how the `NSEnumerator` class accomplishes the same task.

### Example 2-17. Using NSEnumerator to enumerate an array's contents

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Assume NSArray *array exists
NSEnumerator *e = [array objectEnumerator];
id object;

while ( object = [e nextObject] ) {

    // Do something with the object
}
```

Some collection classes have variations on the standard `objectEnumerator` method. For example, the `reverseObjectEnumerator` method of `NSArray` lets you access the array's contents from the last item t first. Another variation is `NSDictionary` 's `keyEnumerator` method, which lets you enumerate the dictior keys instead of its values.

Since the members of an array are indexed, expect an enumerator to return the contents of an array in predictable order. `NSDictionary` and `NSSet` , on the other hand, don't store their contents in a meaning order, so the order in which the enumerators return the members is unpredictable.

### 2.1.3.5 Memory management in collections

Whenever an object is added to a collection, the collection object sends that object a `retain` message, asserting some ownership over the object that is now a member of the collection. This is true whether t object is added as part of the collection initialization, or at a later point with the `addObject` :-based meth mutable collection classes. Objects that are removed from collections receive a `release` message, as the collection no longer has any interest in maintaining ownership over the object. When a collection is deal all member objects are sent a release message. Example 2-18 shows how this works in practice.

Example 2-18. Collection memory management

```
// anObject has reference count of 1
id anObject = [[ObjectClass alloc] init];

// Assume anArray is an existing mutable array; reference
// count of anObject is now 2.
[anArray addObject:anObject];

// anObject reference count now 1, still valid because of
// retain sent by the array in addObject:
[anObject release];

// Either of these actions will cause anObject to be released
[anArray removeObject:anObject];
[anArray release];
```

## 2.1.4 Dates and Time

Cocoa provides three classes to represent date and time information: `NSDate` , `NSCalendarDate` , and `NSTimeZone` . `NSDate` represents an instant in time, to millisecond precision, as the number of secondssi the absolute reference time, midnight (GMT), January 1, 2001. Many `NSDate` methods work with time int A time interval is represented by the Foundation data type `NSTimeInterval` (which is a redefinition of th

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

primitive type `double` ). `NSTimeInterval` s specify a length of time in units of seconds. Example 2-19 sho how to use `NSDate` .

### Example 2-19. Fundamental methods of NSDate

```
// Create an NSDate set to the current date
NSDate *today = [NSDate date];

// Obtain a date that is many centuries in the future
NSDate *future = [NSDate distantFuture];

// Similarly, obtain a date that is many centuries in the past
NSDate *past = [NSDate distantPast];

// A date that is some number of seconds past the system reference
// date (or before if you supply a negative value)
NSDate *intvl = [NSDate dateWithTimeIntervalSinceReferenceDate:60];

// Check for equality of two dates; returns NO
BOOL b = [today isEqualToDate:intvl];

// These methods return either the earlier or
// the later of the two dates involved.
NSDate *d = [today earlierDate:past];       // Returns past
NSDate *d = [today laterDate:future];       // Returns future

// Obtain Time Intervals
NSTimeInterval d = [intvl timeIntervalSinceReferenceDate];

// Number of seconds between receiver date and current date
d = [today timeIntervalSinceNow];

// Number of seconds between the two dates
d = [today timeIntervalSinceDate:[NSDate date]];

// Number of seconds since 1970, another reference date
d = [today timeIntervalSince1970];
```

`NSDate` is a lightweight class that represents dates as points in time. `NSCalendarDate` , a subclass of `NSD` can additionally perform date arithmetic based on the Western Gregorian calendar. `NSCalendarDate` exp the functionality of `NSDate` to provide methods that work with dates in terms of days, weeks, months, ar years. Example 2-20 summarizes what you can do with `NSCalendarDate` .

### Example 2-20. Working with NSCalendarDate

```
// Create an NSCalendarDate
NSCalendarDate *cd = [NSCalendarDate calendarDate];

// Create an arbitrary calendar date
cd = [NSCalendarDate dateWithYear:2002 month:4 day:10 hour:20
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
                                        minute:3 second:0
                                        timeZone:[NSTimeZone systemTimeZone]];

// Retrieve elements of a calendar date
int dce = [cd dayOfCommonEra];      // Returns 730950
int dm = [cd dayOfMonth];           // Returns 10
int dw = [cd dayOfWeek];            // Returns 3
int d = [cd dayOfYear];             // Returns 100
int h = [cd hourOfDay];             // Returns 20
int m = [cd minuteOfHour];          // Returns 3
int s = [cd secondOfMinute];        // Returns 0
int y = [cd yearOfCommonEra];       // Returns 2002
```

Associated with every `NSCalendarDate` object is an `NSTimeZone` object. Instances of `NSTimeZone` capture information about geographic time zones across the planet, such as their name, abbreviation, and "dista from the reference time zone, GMT, in seconds. Additionally, `NSTimeZone` is aware of daylight savings tim capable of translating dates between time zones. `NSCalendarDate` still stores a date in its lowest form as time interval from the reference date, which is behavior it inherits from `NSDate` . `NSTimeZone` translates t time interval from GMT to a specific time zone. The `systemTimeZone` method used in Example 2-20 is jus method of `NSTimeZone` that returns the time zone set on your system. In addition to this method, `NSTime` declares several other methods, some of which are shown in Example 2-21.

### Example 2-21. Working with NSTimeZone

```
// Create time zone objects
NSTimeZone *tz = [NSTimeZone timeZoneWithAbbreviation:@"CST"];

// Obtain the geo-political name of the time zone
// Returns "America/Chicago"
NSString *name = [tz name];

// Get the time zone's abbreviation; Returns CST
NSString *abv = [tz abbreviation];

// Returns whether or not it is daylight saving time; returns NO
BOOL b = [tz isDaylightSavingTime];

// The time difference relative to GMT in seconds; Returns -18000
int s = [tz secondsFromGMT];
```

## 2.1.5 Binary Data

`NSData` encapsulates a buffer of bytes. Many Foundation framework classes have methods that let you i an object from an instance of `NSData` or convert the object's contents into an `NSData` object. `NSData` is a generic object that lets you store and transport data of any kind, any way you like. Example 2-22 gives a example.

### Example 2-22. Working with NSData

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// NSData objects can be created to hold the contents of any data
// buffer, such as a static C character string
char *cData = "This is data, a string of bytes";
NSData *data = [NSData dataWithBytes:cData length:strlen(cData)];

// Create NSData objects from files
data = [NSData dataWithContentsOfFile:@"/path/to/file"];

// Create data objects from resources located by NSURL objects
data = [NSData dataWithContentsOfURL:URLObject];

// Get a C pointer to the data object contents
void *p = [data bytes];

// Copy the contents of data object into a buffer
char  buffer[50];
[data getBytes:(void *)buffer];

// Copy a specified number of bytes into the buffer
[data  getBytes:buffer  length:4];

// Copy a range of bytes from the data object into the buffer
[data  getBytes:buffer  range:NSMakeRange(5,2)];

// Determine the number of bytes in the data
unsigned l = [data length];
```

Note in the second line that despite initializing an `NSData` object with a C string, the `NSData` object is not string. The data object has no idea what its contents represent, only that it is a collection of bytes. The that interacts with the data object is responsible for knowing how to interpret the contents.

Like many other Foundation classes, `NSData` is an immutable class that has a mutable child class, `NSMutableData` . `NSMutableData` adds methods to change the length of the stored data (how many byte in there) and append data to the stored data, as illustrated in Example 2-23

## Example 2-23. Working with NSMutableData

```
// Create an empty NSData object
NSMutableData *mData = [NSMutableData data];

// Set the size of the internal NSData buffer to 29 bytes
[mData  setLength:29];

// Take the data from a buffer and place it
// into the NSData object
[mData  appendBytes:cData  length:29];
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 2.2 Key-Value Coding

*Key-value coding* lets you access the properties of an object (such as the instance variables) indirectly by using strings referred to as *keys*. Although key-value coding can access instance variables directly, it first tries to use accessor methods to access a property. However, accessor methods are not necessarily mapped to instance variables, which means that an accessor may provide a property value that is computed (perhaps from instance variables).

Key-value coding is a powerful feature of Cocoa that forms the basis of many important technologies For example, Cocoa's scripting capability is heavily based on the functionality of key-value coding.

The methods that provide an interface to key-value coding are declared in the Foundation framework's `NSKeyValueCoding` protocol. The principal methods are `valueForKey:` and `takeValue:forKey:`, which get and set the instance variable associated with the specified key. `NSObject` provides default implementations of the methods of `NSKeyValueCoding`. These default implementations associate keys with instance variables based on a simple set of rules. The methods that return a value, `valueForKey:` for instance, attempt to access the property specified by the string `@"key"` using the following means:

1. A public accessor of either the form `key` or `getKey`.
2. A private accessor method of either the form `_key` or `_getKey`.
3. An instance variable named either `key` or `_key`.
4. Finally, if none of these first three attempts results in anything, the method invokes `handleQueryWithUnboundKey:`. The default implementation raises an exception; classes may choose to provide another implementation suitable to their needs.

Methods that set the values of properties, such as `takeValue:forKey:`, attempt to access those properties in a similar fashion, assuming again that the key is the string `@"key"`:

1. A public accessor of the form `setKey:`.
2. A private accessor of the form `_setKey:`.
3. An instance variable named either `key` or `_key`.
4. Finally, if none of these first three rules results in anything, the methods invoke `handleTakeValue:forKey:`. The default implementation raises an exception; classes may choose to provide another implementation suitable to their needs.

Example 2-24 shows the interface for a class with three instance variables, a public accessor to one of the instance variables, and a private accessor to another.

### Example 2-24. Using key-value coding in a class called KVExample

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
@interface KVExample : NSObject {
    id property1;
    id property2;
    id property3;
}
- (id)property1;     // Public accessor; could be getProperty1
- (id)_property2;    // The private accessor; could be _getProperty2
@end

@implementation KVExample
- (id)init
{
    self = [super init];

    if ( self ) {
        property1 = @"Property 1";
        property2 = @"Property 2";
        property3 = @"Property 3";
    }
    return self;
}

// These two methods return instance variable values
-  (id)property1
{
     return property1;
}

-  (id)_property2
{
     return property2;
}

// This method returns a property value that is computed,
// rather than stored in an instance variable
-(NSArray *)allProperties
{
     return [NSArray arrayWithObjects:property1, property2, property3, nil];
}
@end
```

Example 2-25 shows how to access each accessor using the key-value coding interface.

### Example 2-25. Accessing properties of a class using key-value coding

```
id kv = [[KVExample alloc] init];

NSLog( [kv valueForKey:@"property1"];     // Prints "Property 1"
NSLog( [kv valueForKey:@"property2"];     // Prints "Property 2"
NSLog( [kv valueForKey:@"property3"];     // Prints "Property 3"
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Prints "{Property1, Property2, Property 3}"
NSLog( [kv valueForKey:@"allProperties"]);
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 2.3 Working with Files

The Foundation framework provides access to data stored in files in several ways. All of the basic data classes have methods for initializing objects from the contents of files, and for writing the data represented by the object to a file. In addition to these convenience facilities, Foundation provides two classes that provide a much higher level of interaction with files and the filesystem: `NSFileManager` and `NSFileHandle`.

## 2.3.1 The File Manager

The `NSFileManager` class is an interface that applications use to access and manipulate files and directories in the filesystem; instances of `NSFileManager` provide a doorway to the filesystem for application developers. Several of `NSFileManager`'s methods call for a `handler:` argument. The handler is an object that should implement `fileManager:willProcessPath:` and `fileManager:shouldProceedAfterError:` methods. These callback methods allow for error handling and confidence testing with respect to the operation being performed. In Example 2-26, `nil` is passed to `handler:` for the sake of clarity.

Additionally, methods that deal with movement around in the filesystem and perform operations on files and directories typically return a `BOOL` value, to indicate an operation's success or failure. Finally, methods that create new files or directories usually take a dictionary with file attributes as an argument. The attributes dictionary may take values to set the file's owner, group owner, modification date, POSIX permissions; determine whether the extension is hidden; and finally, set th HFS type and creator codes. Any unspecified attribute will take on the default value. Example 2-26 shows how to work with file managers and the filesystem.

### Example 2-26. Working with NSFileManager

```
// Return the default manager for the filesystem
NSFileManager *fm = [NSFileManager defaultManager];

// Change the current directory; returns YES if successful
BOOL b = [fm changeCurrentDirectoryPath:@"/usr"];

// Return the path to the current directory; returns "/usr"
NSString *p = [fm currentDirectoryPath];

// Create a new directory at the path with default attributes
b = [fm createDirectoryAtPath:@"/usr/newDir" attributes:nil];

// Working with file attributes using a mutable dictionary
NSMutableDictionary *attr = [NSMutableDictionary dictionary];
[attr setObject:@"mike" forKey:NSFileOwnerAccountName];
[attr setObject:@"admin" forKey:NSFileGroupOwnerAccountName];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
[attr  setObject:660  forKey:NSFilePosixPermissions];

// Create a new file with these attributes
b = [fm createFileAtPath:@"/usr/newDir/newFile"
                         contents:data attributes:attr];

// Carry out practical filesystem tasks
NSString *p1 = @"/Users/mike/file"
NSString *p2 = @"/Users/mike/Documents/file"
b = [fm movePath:p1 toPath:p2 handler:nil];
b = [fm copyPath:p2 toPath:p1 handler:nil];
b = [fm removeFileAtPath:p2 handler:nil];

// Determine whether a file exists
b = [fm fileExistsAtPath:p1];

// Determine whether a file exists and if it is a directory
// Returns YES; sets dir = NO
BOOL dir;
b = [fm fileExistsAtPath:p1 isDirectory:&dir];

// Check whether the current user can read file at path
b = [fm isReadableAtPath:p1];

// Check whether the current user can write to file at path
b = [fm isWritableAtPath:p1];

// Check whether the current user can execute file at path
b = [fm isExecutableAtPath:p1];

// Check whether the current user can delete file at path
b = [fm isDeletableAtPath:p1];

// Discover the contents of directory at path
NSArray *contents = [fm directoryContentsAtPath:@"/"];

// Determine the directories contained within a directory
NSArray *subpaths = [fm subpathsAtPath:@"/"];


// An enumerator that enumerates the contents at a given path
NSEnumerator *de = [fm enumeratorAtPath:@"/"];
```

Filesystem paths are represented as `NSString` objects. Any path that you pass to an `NSFileManager` method must be an absolute path. This means that files in a user's home directory must be referenced as */Users/username/file*, rather than *~/file*. To aid in path manipulation and standardization, `NSString` provides a number of methods specific to these tasks, many of which are demonstrated in Example 2-27.

## Example 2-27. Path manipulation with NSString

```
// The starting path
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSString *p1 = @"~/Documents/class.m";

// Expand the tilde; returns "/Users/mike/Documents/class.m"
p1 = [p1 stringByExpandingTildeInPath];

// Get the last path component; returns "class.m"
p1 = [p1 lastPathComponent];

// This is how you determine the path extension; returns "m"
p1 = [p1 pathExtension];

// Delete the extension; returns "class"
p1 = [p1 stringByDeletingPathExtension];

// Add a path component to a path; returns "/Users/mike/class"
p1 = [@"/Users/mike" stringByAppendingPathComponent:p1];

// Place the tilde back in; returns "~/class"
p1 = [p1 stringByAbbreviatingWithTildeInPath];

// Add an extension; returns "~/class.h"
p1 = [p1 stringByAppendingPathExtension:@"h"];
```

The Foundation framework also provides several functions that return paths to common locations in the filesystem. `NSHomeDirectory` returns the path to the home directory of the currently logged-in user. `NSHomeDirectoryForUser` takes a username as an argument and returns the home directory for that user. The function `NSTemporaryDirectory` returns a string that is the path to the current temporary directory, typically */tmp*.

## 2.3.2 File Handles

`NSFileHandle` lets developers access and manipulate file data with a fine degree of control by providing methods for moving a pointer within a file, as well as inserting, deleting, and extracting data from the file. Moreover, in the true spirit of Unix, `NSFileHandle` can represent a gateway to communication channels such as pipes, sockets, and devices (such as */dev/null*, */dev/stderr*, */dev/console*). `NSFileHandle` is covered further in Chapter 6, where methods for asynchronous reading and writing are discussed. Example 2-28 explores some uses of `NSFileHandle`.

### Example 2-28. Working with NSFileHandle

```
// Create a file handle for reading an arbitrary file
NSFileHandle *fh = [NSFileHandle fileHandleForReadingAtPath:p1];
fh = [NSFileHandle fileHandleForReadingAtPath:@"/dev/srandom"];

// Create a file handle for writing to a file
fh = [NSFileHandle fileHandleForWritingAtPath:p2];
fh = [NSFileHandle fileHandleForWritingAtPath:@"/dev/null"];

// Create commonly used file handles
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
fh = [NSFileHandle fileHandleWithStandardError];
fh = [NSFileHandle fileHandleWithStandardInput];
fh = [NSFileHanfle fileHandleWithStandardOutput];
fh = [NSFileHandle fileHandleWithNullDevice];

// Write data to a file handle
NSString *str = @"Other Unix boxes";
NSData *data = [str dataUsingEncoding:NSASCIIStringEncoding];
[fh writeData:data];

// Read data from a file handle;
// this could be used for something like % echo "Hello" | ThisApp
fh = [NSFileHandle fileHandleWithStandardInput];

// Read all available data and converting it to a string
NSData *data = [fh availableData];
NSString *str = [NSString stringWithData:data];

// You can also read a specified number of bytes
data = [fh readDataOfLength:400];

// Or you can read up to an end-of-file
data = [fh readDataToEndOfFile];

// And close it when finished
[fh closeFile];
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 2.4 Bundles and Resource Management

A bundle is an abstraction that represents a collection of resources, such as image files, nib files, or loadable code, stored within a folder. Bundles are used pervasively in Mac OS X-applications are themselves bundles, as are preference pane and screensaver modules and application plug-ins. Although bundles are directories, the Finder often presents them to the user as a single file. For a more in-depth discussion of bundles and their usage in Mac OS X, see *Inside Mac OS X: System Overview* (*/Developer/Documentation/Essentials/SystemOverview/SystemOverview.pdf* ).

`NSBundle` provides an interface to bundles in the filesystem. Every Cocoa application has at least one bundle-the main bundle, accessed using the `mainBundle` method-that represents the application. To load other bundles, use the methods `initWithPath:` or `bundleWithPath:`. To access a bundle containing a given class, use `bundleForClass:`.

## 2.4.1 Loading Resources

Using `NSBundle`, you can obtain the paths to resources without knowledge of a bundle's internal directory structure or what localization is used. Methods that find a resource come in two flavors: those that retrieve individual resources, whose names are on the base method name `pathForResource:ofType:`, and those that return all resources of a type, which are based on the method name `pathsForResourceOfType:`. The paths returned by these methods are absolute paths in the filesystem. For example, consider the method `pathForResource:ofType:`. Given the name of the resource (resource file name sans extension) and, optionally, the type (the extension may pass `nil` or `@""` here), this method will return the full path to the specified resource in the main resources directory, which is at *BundleName/Contents/Resources*. If the resource is not found there, then any *.lproj* folders are searched in order according to the user's Language setting in Preferences.

If you want to specify a directory to search in for the resource (as it may not be contained in the *Resources* directory), use the method `pathForResource:ofType:inDirectory:`. If the resource is not present in the specified directory, the method returns `nil`. If `nil` is passed for the parameter `inDirectory:`, a search is performed through a prioritized list of directories. See the `NSBundle` documentation for the search order.

In addition to containing resources, bundles may contain other bundles in the form of plug-ins, frameworks, and other applications. Plug-ins and frameworks are generally located in the */BundleName/Contents/PlugIns* and */BundleName/Contents/Frameworks* directories, respectively. You can discover these paths by using the `builtInPlugInsPath`, `privateFrameworksPath` and `sharedFrameworksPath` methods.

Example 2-29 shows how to use these methods to access resources contained within a bundle.

### Example 2-29. Accessing bundle resources

```
NSString *imagePath;
NSImage *anImage;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSBundle *bundle = [NSBundle mainBundle];

// Locate and load a resource
if ( imagePath = [bundle pathForResource:@"mug_shot"
        ofType:@"tiff"] ) {
    anImage = [[NSImage alloc] initWithContentsOfFile:imagePath];
    // Do something with anImage
}

// The path to the frameworks directory
NSString *fPath = [bundle sharedFrameworksPath];
fPath = [bundle privateFrameworksPath];

// Path of the bundle itself
NSString *bPath = [bundle bundlePath];

// Path to bundle executable
NSString *ePath = [bundle executablePath];

// Obtain the Info.plist dictionary for the bundle
NSDictioanry *iDict = [bundle infoDictionary];
```

## 2.4.2 Loading Code

Bundles also load new classes into the runtime system. Several methods that do this are provided: `load`, `principalClass`, and `classNamed:`. The `load` method loads a bundle's executable code into the runtime, if it has not been loaded previously. The method will return `YES` if loading is successful or if the executable has been loaded already, and `NO` otherwise.

The `principalClass` and `classNamed:` methods not only load a bundle's executable code, but they return a class object for the specified class. In `classNamed:`, the returned class object is specified by name in an `NSString`. If no class by the specified name can be located in the bundle, `Nil` will be returned (`Nil` is the equivalent of `nil` for class objects).

The `principalClass` method returns a class object that is determined by the bundle itself. The bundle's principal class is the class that is generally responsible for the other classes within a bundle. For example, the principal class of most standard Cocoa applications is `NSApplication`. A bundle's *Info.plist* file contains an entry that identifies the principal class with the key `NSPrincipalClass`. Bundle developers can specify a class name here for the principal class. If this entry is not present, `principalClass` returns the class object for the first class loaded in the bundle. Developers can specify the load order of classes by arranging class files in a project in the desired order. Like `classNamed:`, this method returns `Nil` if there is an error loading the code or if no executable is found within the bundle.

Example 2-30 shows how to load executable code with `NSBundle`.

### Example 2-30. Loading code using NSBundle

```
Class exampleClass;
id newObject;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// The main bundle
NSBundle *bundle = [NSBundle mainBundle];

// Obtain and instantiate the principal class
if ( exampleClass = [bundle principalClass] ) {
    newObject = [[exampleClass alloc] init];
    // Do something with newObject
}

// Obtain and instantiate a class by name
if ( exampleClass = [bundle classNamed:@"MyClass"] ) {
    newObject = [[exampleClass alloc] init];
    // Do something with newObject
}
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 2.5 Archiving Objects

Archiving an object (or a collection of interconnected objects, known as a graph) into a `NSData` representation is often useful or necessary. Objects that are archived into an `NSData` object can be transported over network connections or interprocess communication channels and saved to the filesystem. Later, the original graph of objects can be reconstituted from the archive data.

Foundation provides five classes to support the creation and extraction of archives, all subclasses of `NSCoder`:

- `NSArchiver`
- `NSUnarchiver`
- `NSKeyedArchiver`
- `NSKeyedUnarchiver`
- `NSPortCoder`

`NSCoder` declares the common interface for encoding and decoding objects and other Objective-C data types. For example, the `encodeObject` method encodes an object into an archive, and methods such as `encodeInt:` and `encodeRect:` support encoding C data types such as integers and common Cocoa data structures.

`NSCoder` does not implement these methods; it is an abstract class. Rather, subclasses implement the appropriate methods for their particular purpose. `NSArchiver` and `NSUnarchiver` provide a straightforward way of encoding and decoding objects and scalars, but they have limitations. The biggest limitation is that objects in an archive can be decoded only in the same order in which they were encoded. Because of this constraint, changing an encoding system is difficult once it has been established publicly.

## 2.5.1 Keyed Archiving

The `NSKeyedArchiver` and `NSKeyedUnarchiver` classes solve this problem by associating keys with each object and scalar encoded in an archive. Decoders can use these keys to access an archive's contents in a convenient order that isn't constrained by a design decision made in a previous version of the application.

> Keyed archiving is not available in versions prior to Mac OS X 10.2. If your application supports Mac OS X 10.1, then check whether the coder passed in `initWithCoder:` or `encodeWithCoder:` supports keyed archiving. To do this, use the `NSCoder` method `allowsKeyedCoding`, which returns `YES` if keyed coding is supported, and `NO` otherwise.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

The last NSCoder subclass, NSPortCoder, encodes and decodes object proxies in the distributed objects system. NSConnection uses this class, and as such, you should never have to interact with it Chapter 6 discusses the distributed objects system in more detail.

Consider Examples Example 2-31 and Example 2-32. Example 2-31 shows the interface for a hypothetical Employee class. Note in this example that the interface declaration indicates that Employee conforms to the NSCoding protocol.

### Example 2-31. Employee class with support for the NSCoding protocol

```
@interface Employee : NSObject < NSCoding > {
    NSString *firstName;
    NSString *lastName;
    int employeeNumber;
}
// Methods left out
@end
```

Example 2-32 shows a way to implement the NSCoding protocol for the Employee class.

### Example 2-32. Implementing NSCoding in the Employee class

```
@implementation Employee

- (void)setFirstName:(NSString *)newName
{
    [newName retain];
    [firstName autorelease];
    firstName = newName;
}

- (void)setLastName:(NSString *)newName
{
    [newName retain];
    [lastName autorelease];
    lastName = newName;
}

- (void)encodeWithCoder:(NSCoder *)encoder
{
    if ( [encoder allowsKeyedCoding] ) {
        [encoder encodeObject:firstName forKey:@"First"];
        [encoder encodeObject:lastName forKey:@"Last"];
        [encoder encodeInt: employeeNumber forKey:@"Number"];
    } else {
        [encoder encodeObject:firstName];
        [encoder encodeObject:lastName];
        [encoder encodeValueOfObjCType:@encode(int)
                                  at:&employeeNumber];
    }
}
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id)initWithCoder:(NSCoder *)decoder
{
    if ( [decoder allowsKeyedCoding] ) {
        // These may be decoded in any order you like
        employeeNumber = [decoder decodeIntForKey:@"Number"];

        // Returned  values are autoreleased
        [self setFirstName: [decoder decodeObjectForKey:@"First"]];
        [self setLastName: [decoder decodeObjectForKey:@"Last"]];
    } else {
        // These must be decoded in the same order that they
         // were encoded
        [self setFirstName: [decoder decodeObject]];
        [self setLastName: [decoder decodeObject]];
        [decoder decodeValueOfObjCType:@encode(int)
                                  at:&employeeNumber];
    }
    return self;
}

@end
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 2.6 User Defaults

*User defaults* is another term for user application preferences. Mac OS X has a well-designed user defaults system that is accessed in Cocoa through the Foundation class `NSUserDefaults`. Working with `NSUserDefaults` is similar to working with an `NSDictionary`. Default values are stored in the database by keys that the application developer defines in the application. The defaults database is actually a collection of property list files; every application has its own property list file where default are stored. You can view these files in *~/Library/Preferences*.

Defaults are organized into *domains*, which are groupings of default values that have varying degrees of visibility to applications. A domain is either *persistent* or *volatile*. Defaults in a persistent domain are stored in the defaults database, while defaults in avolatile domain are applicable only during the lifetime of the `NSUserDefaults` object that contains those values. `NSUserDefaults` has five standard domains:

`NSArgumentDomain`

Set values for defaults in the argument domain by passing key-value pairs to the application as arguments on the command line, (e.g., *`% MyApp -KeyName Value`*). The argument domain is volatile, so arguments affect the application only during the application session for which they were specified.

*Application*

Application-specific defaults are stored here and kept persistently in the user's defaults database.

`NSGlobalDomain`

Defaults stored in the global domain are applicable to all applications run by the user. This persistent domain is stored in the defaults database.

*Languages*

The languages domain stores defaults that pertain to language choice and localization.

`NSRegistrationDomain`

The registration domain is the lowest-level domain containing application-provided defaults (or "factory settings") used when a default value is otherwise unspecified in a higher domain.

When a default is requested, the domains are searched for the value in order, starting with `NSArgumentDomain` and ending with `NSRegistrationDomain`. The search ends at the first discovery of a default value. Thus, if many domains have values for the same default, `NSUserDefaults` returns the default that occurred in the higher-level domain. You can exploit the search order as a debugging aid by overriding any default by specifying a value in the `NSArgumentDomain`.

User defaults are capable of storing only what property lists can store, namely `NSData`, `NSNumber`, `NSString`, `NSDate`, `NSArray`, and `NSDictionary` (although convenience methods are also provided to get and set scalar values). Using these data types, you can store information, such as dates, numbers, and text, as well as any object that is archiveable. Example 2-33 shows how to interact with the user defaults system.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Example 2-33. Interacting with the user defaults system using NSUserDefaults

```
// Create an instance of NSUserDefaults
NSUserDefaults *prefs = [NSUserDefaults standardUserDefaults];

// Store and retrieve a string
[prefs setObject:@"Mike Beam" forKey:@"Author"];
NSString *author = [prefs stringForKey:@"Author"];

// Store and retrieve a number
[prefs  setFloat:1373.50  forKey:@"NASDAQ"];
[prefs  setInt:2002  forKey:@"Year"];
float level = [prefs floatForKey:@"NASDAQ"];
int year = [prefs intForKey:@"Year"];

// Store and retrieve dates
[prefs setObject:[NSDate date] forKey:@"Last Opened"];
NSDate *lastOpenDate = [prefs objectForKey:@"Last Opened"];

// Store collections
[prefs setObject:dictionary forKey:@"A Dictionary"];
[prefs setObject:array forKey:@"An Array"];

// Retrieve collections
NSArray *array = [prefs arrayForKey:@"An Array"];
NSDictionary *dict = [prefs dictionaryForKey:@"A Dictionary"];

// Use the following if you want mutable objects...
NSMutableArray *mArray = [NSMutableArray
    arrayWithArray: [prefs arrayForKey:@"An Array"]];
NSMutableDictionary *mDict = [NSMutableDictionary
    dictionaryWithDictionary: [prefs dictionaryForKey:@"A Dictionary"]];
```

All applications should establish factory default settings in the registration domain. This is done with the `registerDefaults` method. Establishing defaults in the registration domain often takes place in an overridden `initialize` class method of one of the first classes loaded in your application. This method works well because it is used to initialize classes when they are first loaded by the runtime system, and it is thus one of the earliest entry points in code execution. This example shows how it might be done for a small number of defaults:

```
+ (void)initialize
{
    NSUserDefaults *prefs;
    NSMutableDictionary *defs;

    prefs = [NSUserDefaults standardUserDefaults];
    [defs setObject:@"May" ForKey:@"Month"];
     [defs setInteger:2002 ForKey:"Year"];
    [prefs registerDefaults:defs];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
}
```

If you need to register a large number of defaults, hardcoding them this way might prove cumbersome. For these situations, it may be more convenient to store factory settings in a property list included with the application, which is then read into a dictionary and registered with user defaults:

```
+ (void)initialize
{
    NSString *prefsFile;
    NSUserDefaults *prefs;
    NSDictionary *defs;

    // The factory defaults file is a resource in the application
    // bundle. The path is retrieved using NSBundle.
    prefsFile = [[NSBundle mainBundle]
            pathForResource:@"FactoryDefaults"
            ofType:@"plist"];

    defs = [NSDictionary dictionaryithContentsOfFile:prefsFile];
    prefs = [NSUserDefaults standardUserDefaults];
    [prefs registerDefaults:defs];
}
```

One commonly stored preference is an `NSColor`. There are, however, no provisions for storing a color directly in the defaults database. One way to store information about colors in the defaults database is to store the color space name and a dictionary of the color component values.. All of these data types are supported by `NSUserDefaults`. A better solution is to archive the `NSColor` object into an `NSData` instance and store it in the preferences, as shown in Example 2-34.

## Example 2-34. Storing an NSColor to user defaults

```
// Assume NSColor object color exists
// Store the color
NSUserDefaults *prefs = [NSUserDefaults standardUserDefaults];
NSData *colorData;
colorData = [NSArchiver archivedDataWithRootObject:color];
[prefs setObject:colorData forKey:@"Text Color"];

// Retrieve the color
colorData = [prefs dataForKey:@"Text Color"];
id color = [NSUnarchiver unarchiveObjectWithData:colorData];
```

This technique is not limited to only `NSColor`. It can work with any class of object that conforms to the `NSCoding` protocol, the prerequisite for compatibility with Foundation's archiving system.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 2.7 Notifications

Notifications provide a mechanism for distributing information about events within an application. Notifications provide an alternative to messaging as a means for communicating between objects. Messaging requires that the sender of the message know who the receiver is when the message is dispatched. Effectively, the notifications system decouples the message sender from the message receiver. With notifications, a broadcast paradigm is implemented in which objects post notifications to a *notification center*, which then sends messages to objects (known as observers) which have registered their interest in the type of event, or the originating object.

The notification center is an instance of the `NSNotificationCenter` class; notifications are instances of the `NSNotification` class. Every notification object has a name identifying the notification type, an object associated with the notification that provides context for the notification, and an optional `userInfo` dictionary with which posters may pass additional information. When an observer registers with the notification center, it specifies a method to be invoked in response to the posting of a notification. Upon receiving a notification, the notification center identifies the observers of the specific named notification and invokes a predetermined method in each observer.

To obtain an instance of `NSNotificationCenter`, use the class method `defaultCenter`. This returns an application's default notification center. To register an object with the notification center, invoke the `NSNotificationCenter` method `addObserver:selector:name:object:`. The first argument in this method is the object that is added as an observer; this object is usually `self`. The `selector:` argument provides a method selector for the method that needs to be invoked in response to the notification. The parameter `name:` is the name of the notification, while the final argument lets you specify the object whose notifications you want to be notified of.

Observers can be flexible when specifying the granularity of which notifications they would like to respond to in the `addObserver:selector:name:object:` method. For example, if `nil` is passed to `object:`, then the observer is notified of all notifications of the specified name, regardless of the originating object. Alternatively, `nil` can be passed for the notification name and an object can be specified, which causes the observer to be notified of all notifications posted by the indicated object.

Objects that have registered with the notification center are responsible for removing themselves when they no longer wish to receive notifications or when being destroyed. It is particularly importan to remove an observer object in the object's `dealloc` method, since the notification center does not retain observers. If you do not remove objects before they are destroyed, the notification center will attempt to send messages to objects that no longer exist, resulting in a runtime error.

To remove an object from the notification center, use either `removeObserver:` or `removeObserver:name:object:`. The first removes the specified object as an observer of all notifications from all objects; this is the method you should use before an object is deallocated. The second method selectively removes the specified object from the notification center.

`NSNotificationQueue` is a class that lets you change a notification center's delivery behavior. Each thread has its own notification queue, which has two duties. The first is to coalesce notifications so multiple notifications of the same name posted within a short time of one another are posted to the notification center only once. Second, the notification queue allows for asynchronous posting; the standard behavior of `NSNotificationCenter` handles notifications synchronously.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Cocoa uses notifications extensively. Most objects post notifications of some sort that other objects can use to coordinate actions between objects. For example, Chapter 7 shows how `NSFileHandle` uses notifications to handle asynchronous communication with a socket. Because of the large numbe of predefined notifications, we frequently find ourselves registering objects as observers to these notifications.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 2.8 Operating System Interaction

The Foundation framework provides many services through a small set of classes that allow developers to interact with the underlying operating system in several ways. `NSTask` is an object-oriented interface to configure and launch a process as a subprocess of the current application. `NSProcessInfo` lets an application discover information about its current process.

## 2.8.1 Process Info

Example 2-35 shows some of the information you can obtain by using `NSProcessInfo`.

Example 2-35. Using NSProcessInfo

```
// Get the shared process info object for the current process
NSProcessInfo *proc = [NSProcessInfo processInfo];

// The name and PID of the process
NSString *name = [proc processName];
int pid = [proc processIdentifier];

// The arguments launched with the process
NSArray *args = [proc arguments];

// A dictionary of the environment variables for the process
NSDictionary *env = [proc environment];

// The host name for the host running the process
NSString *host = [proc hostName];

// The operating system version string
// Note: this string is NOT appropriate for parsing
NSString *ver = [proc operatingSystemVersionString];
```

## 2.8.2 Tasks

`NSTask` is a class that lets a program configure, launch, and communicate with another program as a subprocess. This is something you'll see every time you execute an application you work on from within Project Builder.

An `NSTask` is launched in a fully configurable execution environment where environment variables, command line options, and other key points of a task may be set. By default, if no environment configuration is provided for a new task, the task inherits the environment of the parent process that launched it.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Setting up and running a task is straightforward. For example, you could run *ls* on the root directory, as shown in Example 2-36.

### Example 2-36. The quick and dirty NSTask

```
NSArray *args = [NSArray arrayWithObject:@"/"];
NSTask *task = [NSTask launchedTaskWithLaunchPath:@"/bin/ls
                                        arguments:args];
```

Since no environment was set up for the task, the environment of the parent process is used, which includes sending the standard output of the child process to the standard output of the parent process. The issue of interprocess communication becomes important when working with multiple tasks in an application, since tasks do not share memory space with one another, as do multiple threads of an application. You could improve Example 2-33 so the standard output data can be read from a file handle, rather than being forwarded to the parent processes' standard output. Example 2-37 illustrates the flexibility Cocoa offers for configuring and launching new processes.

### Example 2-37. A more complex use of NSTask

```
NSData *data;

// Instantiate and initialize a new task
NSTask *task = [[NSTask alloc] init];

// Create a pipe to communicate with the task
NSPipe *pipe = [NSPipe pipe];

// Get a file handle to read from the pipe
NSFileHandle *fh = [pipe fileHandleForReading];

// Set the path to launch the task at
[task setLaunchPath:@"/bin/ls"];

// Set the arguments; ls takes the directory to list
[task setArguments:[NSArray arrayWithObject:@"/"]];

// Connect the pipe to the task's stdout
[task setStandardOutput:pipe];

// Finally, launch it
[task launch];

// Once its launched we can read data from the pipe
data = [fh availableData];
NSLog(@"%s", [data bytes]);
```

If you compile and run this code, you will find the result to be the same as that from Example 2-36. The point of this exercise, however, was to demonstrate how to fine tune a task in every practical manner.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 2.9 Threaded Programming

Cocoa uses the `NSThread` class to provide multiple threads of execution in applications. Threads are useful if you want to perform a computationally intensive or time-consuming procedure in the background while allowing the main thread of execution to continue normally. When executing code in the main thread of the application, the flow of execution must stop while that code completes execution. If code takes a long time to execute, the user will notice that the application user interface controls freeze and do not respond to any actions.

To correct this problem, you could isolate the time-consuming code into its own method, and then execute that method in its own thread. This is how `NSThread` works-using the `detachNewThreadSelector:toTarget:withObject:` method, as shown in Example 2-38.

### Example 2-38. Multithreading an application

```
// This method is invoked in response to some user action
- (void)someActionMethod:(id)sender
{
    [NSThread detachNewThreadSelector:@selector(longCode)
                              toTarget:self withObject:nil];
}

- (void)longCode
{
    NSAutoreleasePool *pool;
    pool = [[NSAutoreleasePool alloc] init];
    BOOL keepGoing = YES;

    while ( keepGoing) {
        // Do something here that will eventually stop by
        // setting keepGoing to NO
    }

    [pool release];
}
```

As illustrated in Example 2-38, threads exit after the natural completion of a method. If the threaded method is to integrate properly with Cocoa objects, then that method is responsible for setting up and destroying its own autorelease pool.

You can also cause a thread to exit before the natural completion of a method's execution by invoking the `exit` method. In fact, this is the method `NSThread` uses to cause a thread to exit normally at the end of a method. For example, you could insert a conditional into your threaded processing loop, as shown in Example 2-39.

### Example 2-39. Using NSThread's exit method

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)longCode
{
  NSAutoreleasePool *pool;
  pool = [[NSAutoreleasePool alloc] init];
  BOOL exitEarly = NO;

  while ( YES ) {
    // Your code here, which may set exitEarly = YES

    if ( exitEarly ) {
      [pool release];
      [NSThread exit];
    }

    [pool release];
}
```

`NSThread` also declares the `sleepUntilDate:` method, which instructs the thread to take a break until the indicated date is reached. This is demonstrated in Example 2-40.

### Example 2-40. Using NSThread's sleepUntilDate: method

```
- (void)longCode
{
    NSAutoreleasePool *pool = [[NSAutoreleasePool alloc] init];
    BOOL keepGoing = YES;

    while ( keepGoing ) {
        // Put the thread to sleep for 10 seconds
         NSDate *d = [NSDate dateWithTimeIntervalFromNow:10.0];
        [NSThread sleepUntilDate:d];

        // Do something here that will eventually stop by
        // setting keepGoing to NO
    }

    [pool release];
}
```

Another useful method of `NSThread` lets you specify the priority for a thread in the same sense that you can specify a priority for a process using the commands *nice* and *renice*. The method is `setThreadPriority:`, which takes as its argument a `float` between 0.0 and 1.0. A value of 1.0 gives the thread highest priority, while 0.0 gives the thread lowest priority.

Examples Example 2-38 through Example 2-40 indicate that when working with objects in a threaded method, you should always create and destroy an autorelease pool manually for that thread. `NSApplication` defines a thread convenience constructor, which detaches a thread for a specified method, managing the autorelease pool for that thread. This method, declared in `NSApplication`, is `detachDrawingThread:toTarget:withObject:`. The arguments used by this method are the same as `NSThread`'s `detachNewThreadSelector:toTarget:withObject:`, discussed previously in this section.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### 2.9.1 Locks

One of the difficulties of making applications multithreaded is making certain that data accessible from multiple threads (such as class instance variables) is not accessed simultaneously by multiple threads. Cocoa provides a solution to this problem through the class `NSLock`, which provides a mechanism for coordinating the actions of multiple threads.

Foundation defines the `NSLocking` protocol and three classes that conform to this protocol: `NSLock`, `NSRecursiveLock`, and `NSConditionLock`. For a class to conform to the `NSLocking` protocol, it must implement the `lock` and `unlock` methods. The three classes that do conform to this protocol add methods of their own, as described later in this section.

## How Locks Work

Before a thread can execute code that was protected by a lock, a thread must first acquire the lock. A thread acquires a lock by sending a `lock` message to an object that conforms to the `NSLocking` protocol. If a thread has acquired a lock and hasn't yet relinquished it, then any other threads wishing to acquire the lock must stop in their tracks until the current thread releases the lock. By setting a lock in a thread, you prevent other threads from executing a section of code until the lock is removed. Thus, you can prevent threads from simultaneously accessing data by either protecting a common access point to the data with a lock, or by protecting every part of the code that accesses a certain variable with the same lock. This can be done in as shown in Example 2-37. Note that locks are generally created before an application becomes multithreaded, not when the lock is abou to be used.

Using locks is one way to make data sharing between threads safe. Using Cocoa's distributed objects system, discussed at the end of this chapter, is another way to transfe data between threads safely.

#### 2.9.1.1 NSLock

`NSLock` is the simplest lock in the Foundation framework. Example 2-41 shows how it works.

Example 2-41. Using NSLock to coordinate threads

```
NSLock *aLock = [[NSLock alloc] init];    // Previously created

[aLock lock];                             // Set the lock
[anObject setSomeData:toThisData];
[aLock unlock];                           // Relinquish the lock
```

One shortcoming of the code fragment in Example 2-27 is that if one thread has acquired the lock, `aLock`, and hasn't yet relinquished it, then other threads attempting to execute this code will be stopped cold while they wait to acquire the lock. This behavior would be undesirable in many situations. Using `NSLock`'s `tryLock` method is one potential solution. This method attempts to acquire

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

a lock, but doesn't sit around waiting for it. If the lock is immediately available for acquisition, the lock is acquired and `tryLock` returns `YES`. If another thread has the lock at the time `tryLock` is invoked, `NO` is returned and execution resumes. Thus, you could base the following conditional execution of code on the ability for a thread to acquire a lock:

```
// Use the same aLock from Example 2-41

if ( [aLock tryLock] ) {
    // Run your code here
    [aLock unlock];
}
```

### 2.9.1.2 NSRecursiveLock

Sometimes, in sufficiently complex code that has portions protected by locks, a thread attempts to acquire a lock more than once. However, if the thread has already acquired a lock and attempts to do so again, that thread freezes while it waits for the lock to become free. This lock never becomes free since the thread needs to relinquish it, but the thread is frozen waiting for the lock to become available, ad infinitum.

The solution to this problem is to use a lock that is an instance of the `NSRecursiveLock` class. This lock lets a thread acquire a single lock multiple times, thus saving itself from the deadlock that would result in the use of `NSLock`. Example 2-42 shows an example in which a single lock might be acquired more than once by the same thread; this would fail when using an `NSLock`, so use `NSRecursiveLock`.

#### Example 2-42. Using NSRecursiveLock when NSLock would deadlock a thread

```
id rLock = [[NSRecursiveLock alloc] init];
int i;

[rLock lock];

for ( i = 0; i < 10000; i++ ) {
// Perform some thread-worthy, time-consuming computations

    if ( someCondition == YES ) {
        [rLock lock];
// Do something here
        [rLock unlock];
    }
}
[rLock unlock];
```

### 2.9.1.3 NSConditionLock

The third Foundation class that conforms to the `NSLocking` protocol is the `NSConditionLock` class. `NSConditionLock` lets you assign an arbitrary condition when the lock is initialized using `initWithCondition:`; the condition is just an integer. To acquire the lock, the thread sends the lock either a `lockWhenCondition:` or a `tryLockWhenCondition:` message (which are analogous in

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

behavior to lock and tryLock). If the condition passed in these messages is equal to the condition of the receiver lock, then the lock is acquired. Additionally, when relinquishing the lock, you can use the method unlockWithCondition: rather than unlock; this sets the condition of the receiver to the new condition. Example 2-43 shows how to employ NSConditionLock.

### Example 2-43. Conditional locking with NSConditionLock

```
id cLock = [[NSConditionLock alloc] initWithCondition:1];

[cLock lock];
// Do something here whose state you want to record
// as a condition in the lock
[cLock  unlockWithCondition:0];
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 3. The Application Kit

The bulk of the Application Kit (or AppKit) is comprised of classes for user interface components, fron windows and widgets to colors and fonts. From the perspective of an application, the central class is `NSApplication`, which manages much of the basic application architecture, from loading user interface definitions to setting up the run loop to handle events, which relieves you of much of the nitty-gritty often associated with simply making an application tick. The AppKit also provides many architecture-related classes for document management, printing, and interaction with the workspace



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 3.1 AppKit Design Patterns

Besides leveraging the design patterns and methodologies used with the Foundation framework, the Application Kit relies heavily on several others. Two that merit special attention are Model-View-Controller and Target/Action.

## 3.1.1 Model-View-Controller

The Model-View-Controller (MVC) pattern is the driving design pattern in the Application Kit.[1] The premise of this pattern is that code may be split up into logically distinct units that each perform a specific role:

[1] MVC traces its lineage to the first object-oriented programming language, Smalltalk, and has been important ever since.

- The *model* is an object that encapsulates data and provides logic that manipulates that data.
- The *view* is a separate object that only knows how to display data.
- The *controller* is an arbiter between the model and the view. The controller's job is to take data from the model and pass it to the view where it can be displayed. If the view is interactive-able to accept user input-then the controller will interpret those actions and instruct the data model to do something in response.

Many views in the MVC pattern may subscribe to the controller, giving the application flexibility to display data in different contexts and formats without heavy modification of the modeling and contro logic. This idea is illustrated in Figure 3-1, which shows two views of the same data: a table view of the data and a chart view.

Figure 3-1. MVC used to display two different views of the same data

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### 3.1.2 Target/Action

The Application Kit uses the target/action pattern to decouple UI widgets (controls-typically subclasses of `NSControl`) from the code that is executed when the user activates the control. In this pattern, a control keeps a reference to a target object that receives an action message. The action message is stored as a selector in an instance variable of the control object. When the user activates the control, the action message is sent to the target. Action messages and targets are generally established in Interface Builder; however, you can change a control's behavior by using the `setAction:` and `setTarget:` methods of `NSControl`. The current target and action of a control may be ascertained programmatically by using the methods `target` and `action`.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 3.2 Nibs

One of the crown jewels of the Cocoa development environment is Interface Builder, a tool for building graphical user interfaces.

Interface Builder creates and stores user interfaces in *nib* files. Perhaps one of the most important aspects of Interface Builder is that it does not generate source code. Nibs are bundles that contain information and archived objects (in this context often referred to as "freeze-dried") that constitute the elements of the user interface (such as windows, widgets and menus, as well as non-UI objects) as they were arranged and configured with Interface Builder. When a nib file is loaded at run time, the elements are reconstituted exactly as they were in Interface Builder.

Every application has a *MainMenu.nib* file that contains the application's main menu structure. For simple applications, this nib might also contain the application's main window. More advanced applications generally have a number of nib files, each of which defines part of the user interface.

From a design perspective, creating a nib for each window (or logical group of windows) facilitates reuse. From a performance perspective, loading nibs into memory takes time, so it is best to keep them small. Thus, when the application launches, it needs to load only the nib containing the first window the user sees, rather than every window in the application, many of which the user may never open (such as the About Box).

## 3.2.1 Outlets and Actions

Nib files contain definitions for objects that can send messages to other objects in the nib file and be assigned to instance variables of other objects. An object instance variable in Interface Builder is known as an *outlet*. Outlets can be connected to other objects within the nib, and the source code for the class containing the outlet can reference those other nib objects through the outlet instance variable. Objects in nibs also have *actions*, which are methods that other objects may invoke in response to some event, such as a user clicking a button.

When designing a class in Interface Builder, you can create skeleton source files containing instance variables and stubs for action method definitions. In the header file of a class defined in Interface Builder, outlet instance variables have the `IBOutlet` type modifier and action methods have an `IBAction` return type, which is synonymous with `void`. These modifiers help Interface Builder parse class interfaces when importing classes.

When importing class interfaces, Interface Builder recognizes any instance variable of type `id` as an outlet. You can statically type an instance variable and have Interface Builder import it as an outlet by prepending the type with the `IBOutlet` modifier. Both of these instance variables are recognized as an outlet:

```
id statusTextField;
IBOutlet NSTextField *statusTextField;
```

However, the following instance variable will not be recognized as an outlet, since it is statically typed

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

and doesn't have the `IBOutlet` modifier:

```
NSTextField *statusTextField;
```

Interface Builder recognizes methods as actions if they have a `void` return type and a single parameter named `sender`. The type of the `sender` parameter can be `id`, or a class such as `NSButton`. Interface Builder looks for the `sender` parameter name as keyword when parsing methods for actions. If you want more meaningful argument names you can explicitly state that a method is an action using the `IBAction` return type. Interface Builder would recognize the following lines as action methods:

```
- (void)anAction:(id)sender;
- (void)aButtonAction:(NSButton *)sender;
- (IBAction)aButtonAction:(NSButton *)aButton;
```

However, the following example is not recognized as an action, since the argument is statically typed not named `sender`, and the return type is not `IBAction`:

```
- (void)aButtonAction:(NSButton *)aButton;
```

At any point during the execution of an application, you can load additional nibs. The Application Kit extends the Foundation class `NSBundle` (discussed in Chapter 2) to provide the ability to load nibs. The most straightforward way to load a nib is with the method `loadNibName:owner:`. This method searches the application bundle for the best localized nib file variant with the specified name and loads it into memory.

The `owner:` parameter lets you specify an object that will be the nib's owner. This object can be referenced by other objects in the nib file through the File's Owner proxy object, as illustrated in Figure 3-2. By importing the header for the class of object that will load the nib, you can assign the class for the File's Owner from the Info panel's Custom Class pane. This lets you use the outlets and actions of this class to define connections to objects within the nib.

> File's Owner is only a "promise." It does not guarantee that at runtime, the object will be an instance of the specified class. The developer is responsible for ensuring that the object specified in `owner:` is an instance of the appropriate class.

Figure 3-2. The File's Owner relationship between a nib and an object in an application

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

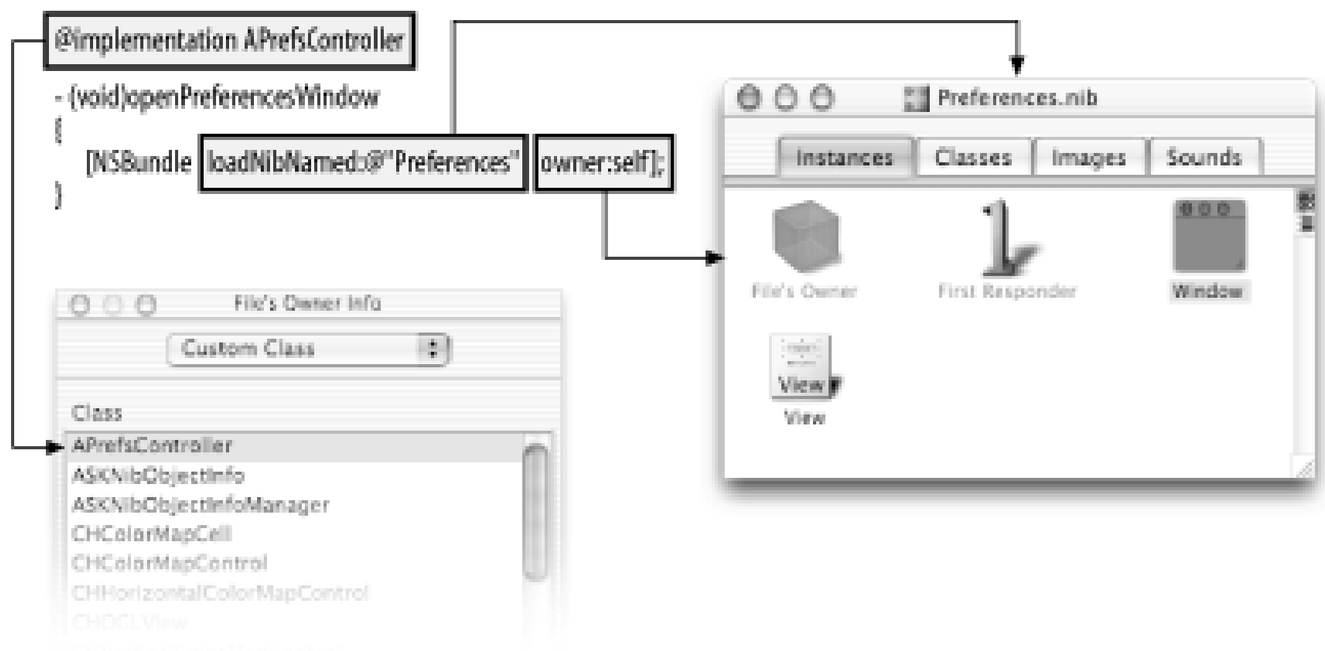


[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 3.3 Application Architecture

The Application Kit's basic architecture is primarily implemented in three classes: `NSApplication`, `NSWindow`, and `NSView`. Figure 3-3 shows the class hierarchy for these classes. Individually, these three classes provide the means for an application to interface with the operating system (and ultimately, the user) via connections to Quartz, the window server, and underlying Unix libraries through Core Foundation. Taken as a whole, these classes form the backbone of the Application Kit's event-handling infrastructure.

Figure 3-3. The hierarchical relationship between NSApplication, NSWindow, and NSView; these three classes all have a common parent in NSResponder

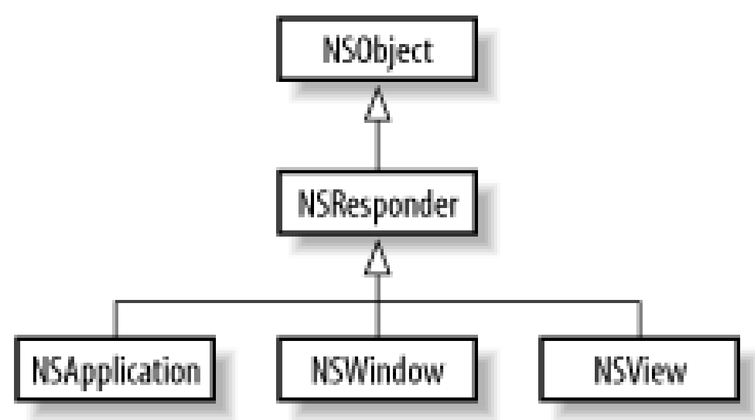


## 3.3.1 The Application

Fundamental to every Cocoa application is a singleton instance of `NSApplication` (accessible by using the class method `sharedApplication` or the global variable, `NSApp`). `NSApplication` provides a link to the window server and other essential operating system services. One of its most important responsibilities is management of the application's *run loop* and event handling. Run loops have the job of managing input from sources such as the mouse and keyboard (through the window server), ports, and timers. As the owner of the application's main run loop, `NSApplication` is the first stop for event processing in an application. Through a direct connection to the window server, `NSApplication` accepts events, packages them as Cocoa objects (instances of `NSEvent`), and dispatches them to the appropriate responder. `NSApplication` is also responsible for managing autorelease pools.

`NSApplication` is also concerned with other details, such as managing the main menu of an application, managing an application's Dock menu and icon, opening windows and sheets in modal run loops, hiding and unhiding the application, and application activation and deactivation. `NSApplication` also enables an application to connect to Mac OS X system services found in its Services menu.

### 3.3.1.1 NSApplicationMain

Every application begins with the same function, named `main`, that every C program starts execution at. Project Builder places this function in the file *main.m* by default, and it has the following very

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

simple implementation:

```
int main(int argc, const char *argv[])
{
    return NSApplicationMain(argc, argv);
}
```

The `NSApplicationMain` function is responsible for bootstrapping an application and getting it running; it performs three tasks:

1. Instantiates the shared instance of `NSApplication`.
2. Loads the application's main nib file (specified in the application bundle's *Info.plist* under the key `NSMainNibFile`).
3. Starts the main run loop by invoking `NSApplication`'s `run` method.

### 3.3.1.2 The application delegate

Like many Cocoa classes, `NSApplication` can take a delegate object that allows customization of how the application behaves without requiring you to create a subclass. For example, you can tell an application that it should quit after the last window closes by assigning a delegate that implements the `applicationShouldTerminateAfterLastWindowIsClosed:` method to return `YES`. This behavior is practiced in many single-window, utility applications that are intended for short-term, transient use.

The following delegate methods give you other opportunities to respond to various changes in the state of the application:

- `applicationDidFinishLaunching:`
- `applicationWillHide:`
- `applicationDidUnhide:`
- `applicationWillResignActive:`
- `applicationDidBecomeActive:`
- `applicationWillTerminate:`

The easiest way to assign a delegate to your application's `NSApplication` object is from within Interface Builder. *MainMenu.nib*'s File's Owner represents the shared application instance, so you can connect an object directly by using its delegate outlet. It is also possible to assign an application delegate programmatically using `NSApplication`'s `setDelegate:` method.

### 3.3.1.3 The run loop

Run loops monitor the various sources of input for an application-including timers, ports (receiving

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

messages from other applications), Distributed Objects connections, and keyboard and mouse events from the window system-and dispatch them to the various parts of an application for handling. Because of their role in receiving and dispatching events, run loops are often referred to as *event loops*. `NSApplication` is responsible for creating and managing an application's main run loop.

Run loops work by polling each input source to see if there is input that needs to be processed. Multiple input sources are handled in successive passes through the run loop. If an input source does require processing, then the run loop takes the necessary action to handle that input source. For example, if the run loop determines that a timer needs to be handled, it invokes the method specified by the timer in a target specified by the timer. Once this method invocation has returned, the run loop continues processing input. Figure 3-4 illustrates how this process occurs.

Figure 3-4. How run loops process input sources

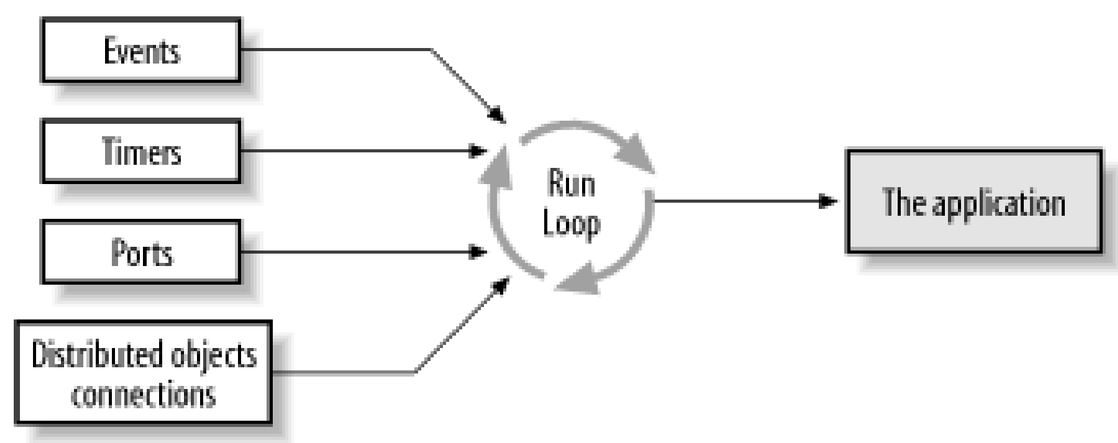


The Foundation class `NSRunLoop` is used as the interface to run loops. Generally you don't need to create or manage run loops, as this is taken care of by the application. Every thread in an application has a run loop created for it. However, `NSApplication` starts only the main application thread. If you create a new thread that needs to monitor input sources, you can obtain a reference to the run loop by using `NSRunLoop`'s method `currentRunLoop`; a `run` message to this run loop will set it in motion.

## 3.3.2 The Window

In Cocoa, the window is the foundation of all drawing, and it is a crucial link in the path of an event. Windows are instances of the class `NSWindow`, or one of its subclasses. The `NSWindow` class implements many parts of an application's machinery, such as the control of a window's level relative to other windows, window zooming and resizing, miniaturization, hiding and unhiding, activation, and deactivation. A subclass of `NSWindow`, `NSPanel`, adds behaviors to windows that make them suitable for utility purposes. The AppKit implements several `NSPanel` subclasses that give access to standard Mac OS X user interfaces, such Open and Save dialogs in `NSOpenPanel` and `NSSavePanel`, the font panel with `NSFontPanel`, and the Print dialog with `NSPrintPanel`.

### 3.3.2.1 Delegate methods

Like `NSApplication`, `NSWindow` defines delegate methods that let you modify the window's default behavior. For example, a controller managing a document might change a window's default closing behavior, as shown in Example 3-1.

Example 3-1. Altering the default closing behavior of a window

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)windowShouldClose:(NSWindow *)window
{
    // If the document is clean, let the window close
    if ( ![documentData hasUnsavedChanges] )  {
        return YES;
    } else  {
        // Run an alert panel to ask the user if they want to
        // save changes; return appropriate value
    }
}
```

### 3.3.3 The View

NSView, an abstract class that provides support for Cocoa's basic drawing, event-handling, and printing architecture, is the third class in the AppKit trifecta. It is the parent class of every control in Cocoa, from buttons and sliders to tables and color wells. Due toNSView's status as a child class of NSResponder (see Figure 3-2), all NSView subclasses can handle events. Additionally, NSView is the portal to Quartz; all custom drawing and graphics are handled by subclasses ofNSView (Chapter 4 discusses NSView's relationship with Quartz and drawing graphics withNSView).

In the Application Kit, an interface's hierarchical composition is manifested as a*view hierarchy* in which every NSView is nested within a parent NSView. Any view may contain zero, one, or several *subviews*, and every subview has exactly one*superview*. The exception is the top-level view at the root of the hierarchy, which is the parent window's*content view* . To access the content view, use the NSWindow methods contentView and setContentView:.

For an example of a view hierarchy, consider the main window of Mail, shown inFigure 3-5. Mail has a fairly simple view hierarchy. The window's top-level content view has two subviews: the NSTextField that displays the number of messages and an NSSplitView. This split view, in turn, has as its subviews an NSTableView and an NSTextView.

Figure 3-5. View hierarchy of a simple Mail window

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

There are actually two more view layers in the hierarchy between the split view, the table view, and the text view. Both `NSTableView` and `NSTextView` are generally contained within an `NSClipView`, which is then contained within `NSScrollView`. The scroll views are the true subviews of the `NSSplitView`. Thus, for the `NSTableView` the true hierarchy is `NSSplitView` `NSScrollView` ⟶ `NSClipView` `NSTableView`. Furthermore, a clip view is not the only child of a scroll view. The two scrollers are also view objects that are children of the scroll view.

Fortunately, Interface Builder interacts with `NSTableView` and `NSTextView` objects that are already part of the scroll view hierarchy, so you don't normally have to interact with the mechanics of scroll and clip views.

### 3.3.3.1 Managing the view hierarchy

`NSView` declares a number of methods that manage the view hierarchy. To add a subview to a view, use the method `addSubview:`, or `addSubview:positioned: relativeTo:`. To remove a subview invoke in the subview to remove the method `removeFromSuperview`. You can easily determine the superview of a view by sending that view a `superview` message; likewise, the subviews of a viewcan be returned as an `NSArray` of `NSView`s by sending that view a `subviews` message. When building an interface, you don't usually have to interact with the view hierarchy, as Interface Builder takes care of the details.

More important than knowing how to work with the view hierarchy is understanding how a view's geometry is defined both in terms of its coordinate system and the coordinate system of its superview. When a view is added to the hierarchy, it claims a rectangular region of its superview, known as the *frame*, as its own and takes responsibility for drawing in that region and handling events that originate in that region. The view's frame defines the position and size of the view within the coordinate system of its superview. You can modify the view's frame with methods such as `setFrame:` and `setFrameOrigin:`.

Another rectangle parameterizes the geometry of a view: the *bounds rectangle*. The bounds rectangle defines the view in terms of its own coordinate system. Another way of looking at it is that the frame gives an external description of the view while the bounds gives an interior description of the view. `NSView` declares the methods `frame` and `bounds` for retrieving these rectangles, which are of type `NSRect`.

You will often need to convert coordinates in one view's coordinate system to that of another view. `NSView` provides several methods for converting points, sizes, and rects between coordinate systems For example, `convertPoint:fromView:` converts the specified point from the coordinate system of `fromView:` into the coordinate system of the receiver. The method `convertPoint:toView:` does the opposite, converting from the receiver's coordinate system to that of `toView:`. Similar methods convert `NSSize`s and `NSRect`s.

`NSView`, being a subclass of `NSResponder`, is a key component of the event handling system. By subclassing `NSView`, developers provide event-handling capabilities by simply implementing the relevant event-handling methods (declared in `NSResponder`), such as `mouseMoved:`. The event-handling system invokes these methods automatically, when appropriate.

Another feature of `NSView` is *tracking rectangles*. Tracking rectangles are regions in a view that generate special events as the mouse moves through the rectangle. When the mouse enters a

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

tracking rectangle, a mouse-entered event is generated. When the mouse exits the rectangle, a mouse-exited event is generated. Implement the methods`mouseEntered`: and `mouseExited`: to handle these events. Tracking rectangles are defined with the methods`addTrackingRect:owner:userData:assumeInside`:. This method returns a tag identifying the tracking rectangle. A tracking rectangle may be removed by specifying the tag in the`removeTrackingRect`: method.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 3.4 Controls

The most visible aspects of an application are thecontrols that users interact with. In Cocoa, control objects such as buttons, tables, sliders, and text fields all have a common parent class:`NSControl`, which is itself a subclass of`NSView`. Figures Figure 3-6 and 3-7 show the class hierarchies for`NSCell` and `NSControl`, and Table 3-1 describes the control classes implemented in the Application Kit.

Figure 3-6. NSControl class hierarchy

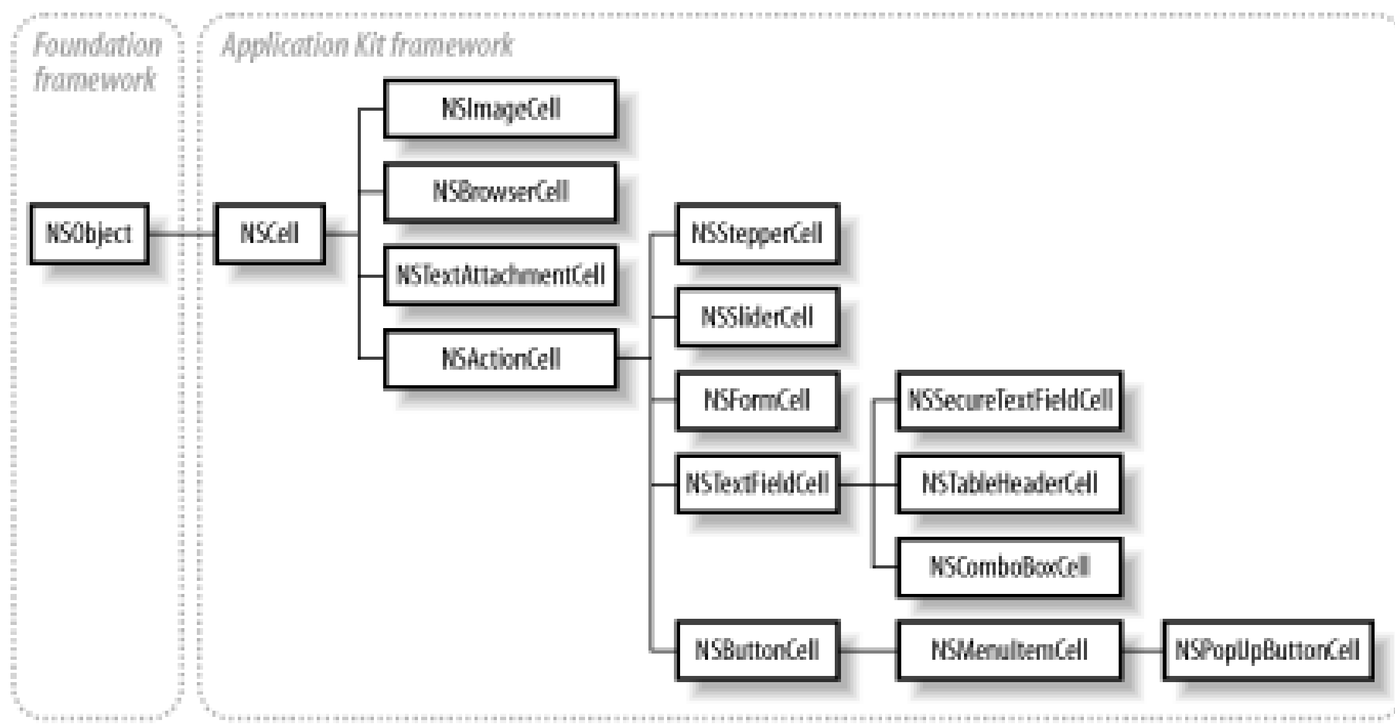


In general, a Cocoa control must have the ability to do several things:

- Draw itself on the screen.
- Respond to basic events such as a mouseclick or a drag.
- Send action messages to arbitrary objects in response to events.

`NSControl` gives some amount of control over when and how a control sends the action message to its target. Specifically, you can specify whether the action is to be sent only after the user has finished clicking the control (i.e., when the mouse button is raised), or if the action is to be sent continuously while the mouse button is depressed. You can set this behavior either in Interface Builder or by using the method `setContinuous:`.

## 3.4.1 Cells

Most AppKit controls have associated cell classes, and in those cases the cell implements all drawing and event handling, while the control serves as a container within which the cell is drawn. A cursory comparison of `NSCell` to `NSControl` makes it appear as though these classes unnecessarily duplicate

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

each other's behavior (see Figure 3-7). For example, both classes declare methods such as `intValue`, `floatValue`, `doubleValue`, `stringValue`, `alignment`, and `font`. The impression is strengthened when considering `NSCell`'s responsibility for drawing many Application Kit controls, and that it takes over other similar roles you would expect from an `NSControl`. To understand the division of labor between cells and controls, consider the issues of performance and flexibility.

Figure 3-7. NSCellclass hierarchy

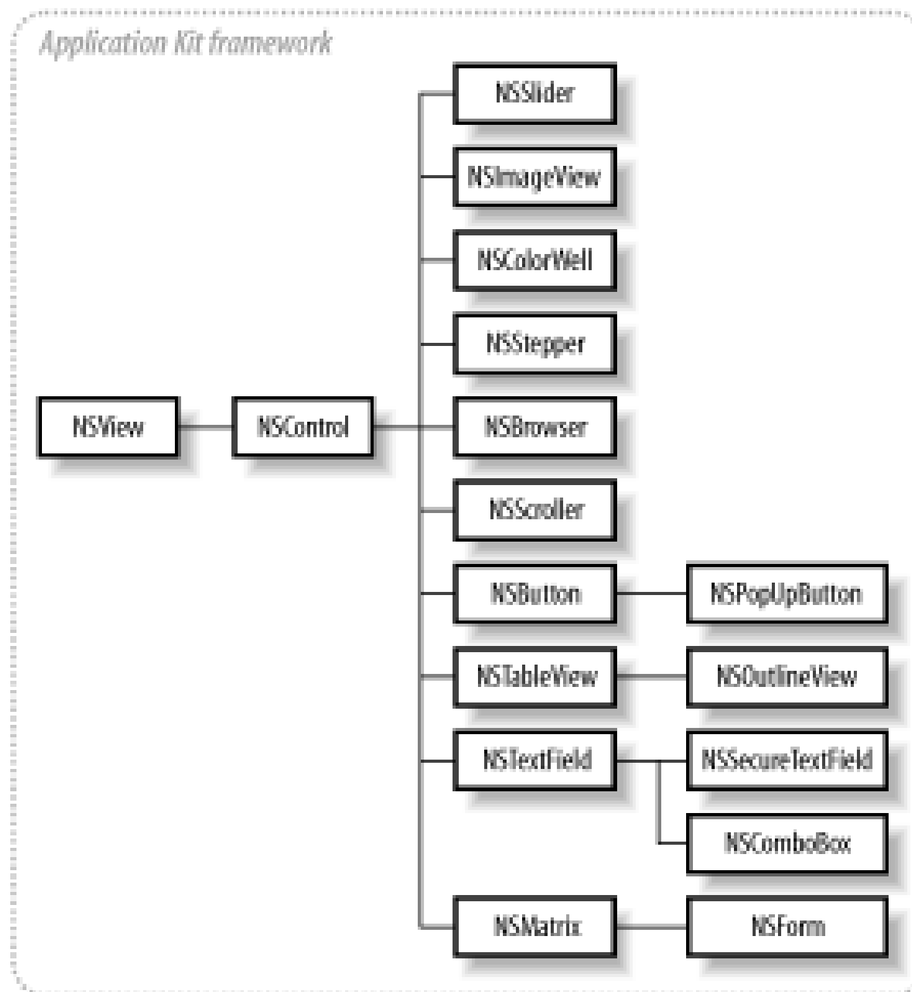


Because `NSControl` is a subclass of `NSView`, it comes with a lot of baggage (inherited instance variables and data structures) that take memory. As a result, the performance of an application can degrade as the number of `NSView` instances in an interface increases. `NSCell`, however, is a much more lightweight object.

Consider now the class `NSMatrix`. `NSMatrix` is a subclass of `NSControl` that manages a rectangular array of `NSCell`s. It is often used in situations when several similar controls are needed, such as for the keypad in the Calculator application, or in a spreadsheet. Consider the case of a 10-column by 10 row spreadsheet. Implementing such a spreadsheet with text views would require 100 instances of `NSTextField`. However, if you were to build a spreadsheet with an `NSMatrix` you would have just one instance of an `NSView` subclass and 100 instances of `NSTextFieldCell`, a decidedly lighter-weight class than `NSTextField`. Moreover, when drawing the matrix, there is just a single graphics context switch (as opposed to one context switch per view). You can see the advantage of using cells over views as the size of the spreadsheet increases.

Cells also facilitate the creation of composite controls that are composed of many different parts, such as table or browser views. `NSTableView`, for example, draws the contents of table columns with `NSTextFieldCells`. This can be changed to display the contents of a column using `NSComboBoxCell` or `NSButtonCell`.

Table 3-1 summarizes the various Application Kit control and cell classes.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Table 3-1. Various Application Kit control and cell classes

| Control class | Cell class | Description |
|---|---|---|
| NSControl | NSCell | The parent class of all controls; as an abstract class, it does not correspond to a real control |
| NSBrowser | NSBrowserCell | Displays hierarchical data with levels arranged in columns |
| NSButton | NSButtonCell | A simple push button |
| NSPopUpButton | NSPopUpButtonCell | Implements a pop-up or pull-down menu |
| NSColorWell | N/A | Selects and displays an NSColor |
| NSImageView | NSImageCell | Displays an image and allows dragging images to and from the control |
| NSMatrix | N/A | Displays rows and columns of controls, such as radio button controls |
| NSForm | NSFormCell | An NSMatrix of NSFormCells that are made up of an input text field and a label |
| NSScroller | N/A | A scrollbar control used in NSScrollViews |
| NSSlider | NSSliderCell | A slider control |
| NSTableView | N/A | A control that displays data arranged in rows and columns |
| NSOutlineView | N/A | Displays hierarchical data in an expandable/collapsible list |
| NSStepper | NSStepperCell | A control with two buttons that increment or decrement its value |
| NSTextField | NSTextFieldCell | Displays and inputs text |
| NSComboBox | NSComboBoxCell | A control that lets you enter text directly or click an attached arrow to reveal a pop-up menu list of items |
| NSSecureTextField | NSSecureTextFieldCell | A NSTextField subclass that displays all characters as dots |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 3.5 Menus

The `NSMenu` and `NSMenuItem` classes implement menus in Cocoa. `NSMenu` provides an implementation for actual menus, while `NSMenuItem` represents individual items within menus. An application's menus appear in the main menu bar across the top of the screen. By and large, an application's main menu is assembled in Interface Builder, which provides facilities for editing menu structures and setting menu item targets and actions. Additionally, Interface Builder has several pre-configured menus, such as File and Edit that contain standard menu items familiar to users. An application's main menu is contained in the main nib of an application.

Every application also has a Dock menu, which pops up when you right-click on an application's Dock icon. Dock menus are easily created in Interface Builder by connecting an instance of `NSMenu` to the File's Owner's `dockMenu` outlet. Alternatively, the application delegate can supply a Dock menu by implementing the method `applicationDockMenu:` (this is useful if you want to dynamically reconfigure the menu). A third way of specifying a Dock menu is to assemble the `NSMenu` object in a nib and specify the nib's file name in the application's *Info.plist* file under the `AppleDockMenu` key.

`NSView` objects manage contextual menus. In Interface Builder, every view has a `menu` outlet, which can be connected to an `NSMenu` object. The menu that you connect to this outlet will appear as a contextual menu when you right-click over the view. Contextual menus can be assigned to a view by overriding the method `menuForEvent:` in `NSView` subclasses. This method has an `NSEvent` object as the parameter and should be implemented to return an `NSMenu`. Because an event object is provided in this method, you can use it to return a menu based, for example, on the location of the event within the view. Example 3-5, in Section 3.9.1, shows how to extract this information from an `NSEvent` object.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 3.6 Sheets

Sheets implement window modal (as opposed to *application* modal) dialogs that are attached to the window. Thus, when a dialog pops up asking for attention, it blocks interaction only with that particular window, not the entire application. When a sheet is opened or closed, it appears to slide out of the title bar. Because the sheet is attached to another window, such as a document window, the user never loses track of what dialog belongs with which window. Figure 3-8 shows an example of a sheet.

Figure 3-8. A TextEdit sheet asking if you want to save changes

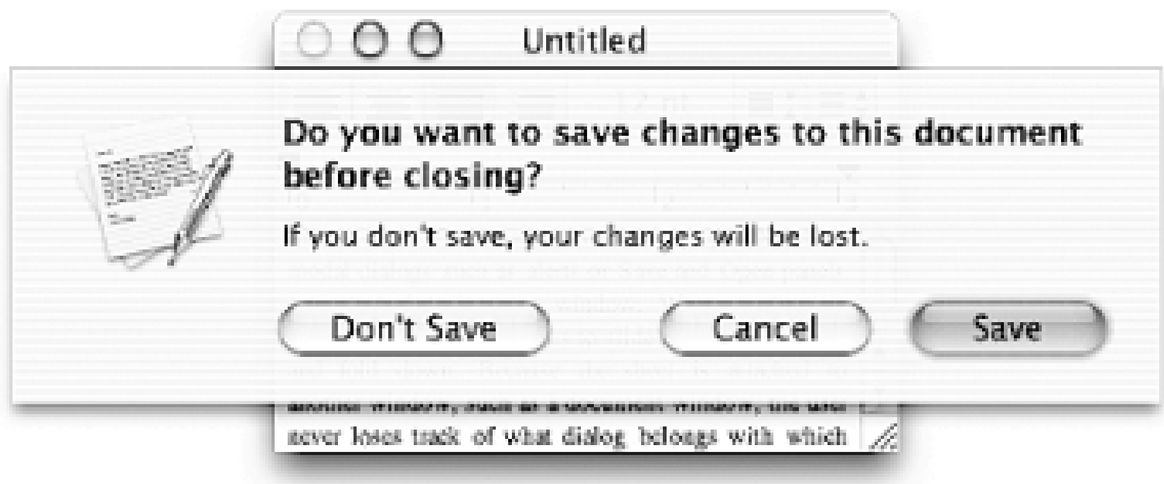


The Application Kit defines a number of convenient functions for displaying standard alert and message sheets, including `NSBeginAlertSheet`, `NSBegin-InformationalAlertSheet`, and `NSBeginCriticalAlertSheet`. Each function takes the same parameters; they differ only in the icon displayed on the left of the sheet. The function prototype for `NSBeginAlertSheet` is the following:

```
void NSBeginAlertSheet(NSString *title,
                       NSString *defaultButton,
                       NSString *alternateButton,
                       NSString *otherButton,
                       NSWindow *docWindow,
                       id modalDelegate,
                       SEL didEndSelector,
                       SEL didDismissSelector,
                       void *contextInfo,
                       NSString *msg, ...)
```

Table 3-2 describes each parameter.

Table 3-2. Parameters for alert sheet functions

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| Parameter | Description |
|---|---|
| `Title` | The title of the sheet, displayed at the top of the sheet in bold-faced font. |
| `defaultButton` | The title of the sheet's default button, generally "OK". Passing `nil` or an empty string will give a localized default button title (i.e., "OK" in English). |
| `alternateButton` | The title of the sheet's alternate button, such as "Don't Save," that appears on the left side of the sheet when three buttons are present. Passing `nil` causes this button to not be created. |
| `otherButton` | Title for a third button, such as "Cancel", that appears in the middle. Passing `nil` causes this button to not be created. |
| `docWindow` | The window to which the sheet is attached. |
| `modalDelegate` | The object that handles user interaction with the sheet. |
| `didEndSelector` | A selector of the method implemented by the modal delegate that will be invoked when the modal session is ended, but before the sheet is dismissed. |
| `didDismissSelector` | Selector of the method implemented by the modal delegate is invoked after the sheet is dismissed. This may be `NULL` if you don't want to end a `didDismissSelector`. |
| `contextInfo` | Pointer to additional data to be passed to `didEndSelector` or `didDismissSelector`. |
| `msg` | A `printf` formatted message to be displayed in the sheet. Optional `printf`-style arguments may follow the message. |

An alert similar to the one in Figure 3-8 can be created with a call to `NSBeginInformationalAlertSheet`, as shown in Example 3-2.

### Example 3-2. Creating an alert sheet with NSBeginInformationalAlertSheet

```
NSBeginInformationalAlertSheet(
            @"Do you want to save changes to \
                     this document before closing?"
            @"Save",
            @"Don't Save",
            @"Cancel",
            mainWindow,
            self,
            @selector(sheetDidEnd:returnCode:contextInfo:),
            NULL,
            NULL,
            @"If you don't save, your changes will be lost.");
```

You can display any window as a sheet by using APIs provided by `NSApplication`. To display a sheet, invoke the following method:

```
beginSheet:modalForWindow:
    modalDelegate:didEndSelector:contextInfo:
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

The first argument, `beginSheet:`, is the `NSWindow` we wish to display as a sheet. The `modalForWindow:` argument specifies the window to which the sheet is attached. Since application execution continues while a sheet is open, the sheet uses a modal delegate to handle user interaction. This delegate is assigned in the `modalDelegate:` argument. The callback method is indicated in `didEndSelector:` and has the following signature:

```
- (void)sheetDidEnd:(NSWindow *)sheet
        returnCode:(int)returnCode
        contextInfo:(void *)contextInfo;
```

In this method, `contextInfo:` is the object passed in the `NSApplication` method used to open the sheet. It is used to optionally pass arbitrary information between the creator of the sheet and the modal delegate.

To end a document modal session, use `NSApplication`'s methods `endSheet:` or `endSheet:returnCode:`. Each method takes the sheet window as a parameter. The second, `endSheet:returnCode:`, also takes an integer return code that is passed to the `didEndSelector:` method. Example 3-3 shows how to open and close a sheet in an application.

### Example 3-3. Using sheets in an application

```
/*
 * This method is invoked to open a sheet.
 * Assume sheetWindow and mainWindow are Interface Builder
 * outlet instance variables connected to windows in a nib.
 */
- (void)openSheet:(id)sender
{
    SEL selector = @selector(sheetDidEnd:returnCode:contextInfo:);

    [NSApp beginSheet:sheetWindow
       modalForWindow:mainWindow
        modalDelegate:self
       didEndSelector:selector
          contextInfo:NULL];
}

/*
 * This could be the action of the "Cancel" button of the sheet
 * in Figure 3-8.
 */
- (void)cancelSheet:(id)sender
{
    [NSApp endSheet:sheetWindow returnCode:NSCancelButton];
}

/*
 * This could be the action of the "Save" button of the sheet
 * in Figure 3-8.
 */
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)acceptSheet:(id)sender
{
    [NSApp endSheet:sheetWindow returnCode:NSOKButton];
}

- (void)sheetDidEnd:(NSWindow *)sheet
      returnCode:(int)returnCode
      contextInfo:(void *)contextInfo
{
    /*
     * Can do something here based on the value of returnCode
     * or do something in the button actions themselves.
     */
    if ( returnCode == NSOKButton ) {
        // If OK was clicked...
    } else if ( returnCode == NSCancelButton ) {
        // If Cancel was clicked....
    }

    [sheet orderOut:nil];
}
```

In this example, `NSOKButton` and `NSCancelButton` are global constants often used to identify those buttons in a dialog. The `endSheet:` methods only end the document modal session; they do not remove the sheet from the screen. To hide the sheet, send an `orderOut:` message to the sheet window, which Example 3-3 does in the callback method `sheetDidEnd:returnCode:contextInfo:`.

Finally, there are yet more ways to display sheets: the AppKit classes that implement standard Mac OS X user interfaces, such as `NSPrintPanel` and `NSOpenPanel`, all provide ways to display their respective interfaces as document modal sheets.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 3.7 Drawers

Drawers provide additional window space for an application's interface, and can easily be tucked away from view when not in use. Drawers are ideal for controls that are frequently used, but don't need to be visible at all times. Figure 3-9 shows an example of a drawer in Mail.

Figure 3-9. The mailboxes drawer from Mail.app

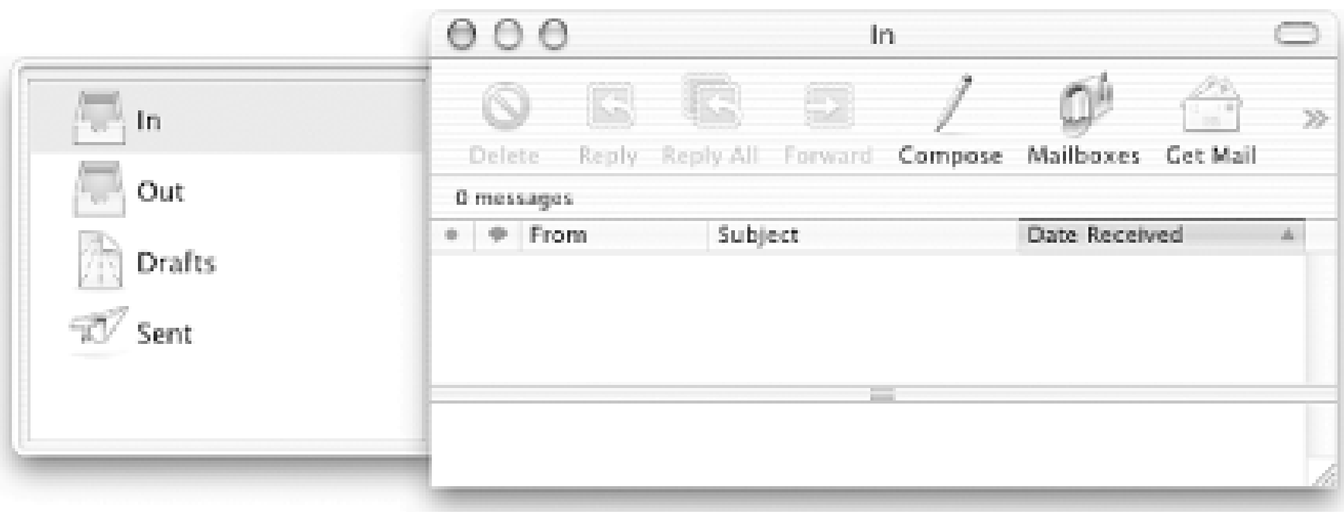


The class `NSDrawer` defines the behavior of drawers. Interface Builder provides the ability to create drawers and attach them to windows. The window that a drawer is associated with is called the *parent window*. Like windows, drawers contain a view hierarchy. The top-level view of this hierarchy is the drawer's *content view*. `NSDrawer` objects in Interface Builder have outlets connected to the drawer's parent window and content view. Alternatively, you can set a drawer's parent window of a drawer with the method `setParentWindow:` and set the content view with `setContentView:`.

When a drawer opens or closes, it slides from an edge of the parent window. Drawers have a preferred edge of the parent window on which they try to open. Without sufficient room between the preferred edge and the adjacent edge of the screen display, the drawer opens on the opposite side of the window. The preferred edge may be any side of the window: top, bottom, left, or right. You can access this property with `setPreferredEdge:` and `preferredEdge`. In these methods, the edge is represented by the data type `NSRectEdge`, which has the possible constant values `NSMinXEdge`, `NSMaxXEdge`, `NSMinYEdge`, and `NSMaxYEdge`.

A drawer's state is determined by the `state` method. The state of a drawer can be specified with `NSDrawerClosedState`, `NSDrawerOpenState`, `NSDrawerClosingState`, or `NSDrawerOpeningState`. To open a drawer, send an `open` message. If the drawer is open, nothing happens. To close a drawer, invoke `close`, which will do nothing if the drawer is already closed. Each method has an counterpart that is appropriate for use as the action of an interface object: `open:` and `close:`. Additionally, the `toggle:` action method closes an open drawer and opens a closed drawer.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 3.8 Toolbars

Cocoa implements toolbars in the `NSToolbar` and `NSToolbarItem` classes. `NSToolbar` implements the toolbar itself, while `NSToolbarItem` represents the individual icons and controls within the toolbar.

Unfortunately, as of the December 2002 release of the Developer Tools, toolbars cannot be created within Interface Builder. Instead, you have to create them manually with code.

To create a toolbar, instantiate an instance of `NSToolbar` and initialize it with the method `initWithIdentifier:`. The identifier in this method is a string that identifies the toolbar within an application (it is used, for example, in document-based applications to reflect changes in a toolbar in one document window in all the toolbars of all open document-windows). To attach a toolbar to a window, invoke `NSWindow`'s `setToolbar:`; the `toolbar` method of `NSWindow` returns a window's assigned toolbar.

`NSWindow` provides a two action methods for interacting with toolbars. The method `toggleToolbarShown:` hides and shows the toolbar. This is the action for the "Hide Toolbar" menu item (as well as the pill-shaped button on the right side of the window's title bar). Note that `toggleToolbarShown:` causes the title of this menu item to alternate between "Hide Toolbar" and "Show Toolbar". This method relies on `NSToolbar`'s `isVisible` and `setVisible:` methods. `isVisible` returns `YES` if the toolbar is present, and `NO` otherwise; `setVisible:` takes a `BOOL` indicating whether the toolbar should be hidden or shown.

`NSWindow`'s `runToolbarCustomizationPalette:` method is the action method for the "Customize Toolbar..." menu item. It uses `NSToolbar`'s `runCustomizationPalette:` and `customizationPaletteIsRunning` methods. The `runCustomizationPalette:` opens a sheet for the customization palette and dismisses the sheet when the user is done.

`NSToolbarItem` represents the buttons, icons, and controls within a toolbar. The `initWithItemIdentifier:` method initializes instances of `NSToolbarItem`. The item identifier is a string that uniquely identifies the toolbar item. The Application Kit provides a number of standard toolbar items, such as the "Colors" and "Fonts" items, as well as separator and space items. Passing one of the string constants listed in Table 3-3 creates these standard toolbar items.

Table 3-3. Standard toolbar item identifiers

| Item identifier | Description |
|---|---|
| `NSToolbarSeparatorItemIdentifier` | The Separator item |
| `NSToolbarSpaceItemIdentifier` | The Space item |
| `NSToolbarFlexibleSpaceItemIdentifier` | The Flexible Space item |

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| Item identifier | Description |
|---|---|
| NSToolbarShowColorsItemIdentifier | The Color item, which displays the color panel |
| NSToolbarShowFontsItemIdentifier | The Fonts item, which displays the font panel |
| NSToolbarCustomizeToolbarItemIdentifier | The Customize item, which opens the toolbar customization palette |
| NSToolbarPrintItemIdentifier | The Print item, which sends a printDocument: message to firstResponder |

You can set many attributes in a toolbar item. Minimally, you should assign the toolbar item a label, an image, an action, and a target. The item label is set with the method setLabel:. This label appears under the item image in the toolbar. You can also give the toolbar item a more descriptive label that appears in the customization palette by using the method setPaletteLabel:. The icon image of the toolbar item is set with setImage:, which takes an NSImage as its argument. To set the target/action pair of the toolbar item, use setTarget: and setAction:. If you do not set the target, the action of the toolbar item is invoked in the first responder that implements it.

A toolbar item can be either a simple icon button, such as the Mailboxes and Junk icons shown in Figure 3-10, or a custom NSView containing any control you wish. The Search field in Figure 3-10 is an example of a toolbar item that uses a custom view rather than an icon button. The simple icon buttons are created by giving the toolbar item an image, as discussed in the last paragraph. To assign a custom view to a toolbar item, use the method setView:.

Figure 3-10. The Mail toolbar

NSToolbar relies on a delegate object to supply the toolbar items that populate the toolbar and the customization palette. The delegate should be able to return an NSToolbarItem for every control that might appear in the toolbar. You can set this delegate by sending a setDelegate: message to the toolbar. The delegate is required to implement the following three methods:

toolbar:itemForItemIdentifier:willBeInsertedIntoToolbar:

This method should return a fully configured instance of NSToolbarItem for the specified toolbar and item identifier. The willBeInsertedIntoToolbar: flag indicates whether the item is about to be inserted into the toolbar. If this parameter is YES, you can expect that the delegate method toolbarWillAddItem: will be called soon.

toolbarAllowedItemIdentifiers:

This method should return an NSArray of item identifier strings for all items that may go into the toolbar. The order of the item identifiers in the returned array determines the order in which the items appear in the customization palette.

toolbarDefaultItemIdentifiers:

This method returns an NSArray of item identifiers for the items that make up the default

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

toolbar. The order of the item identifiers in this array determines the order in which items appear in the default toolbar.

Optionally, the toolbar delegate may implement the following two methods:

`toolbarWillAddItem`:

Called just before a toolbar item is added to a toolbar. The parameter is a notification posted by the toolbar. The object of this notification is the toolbar to which the item will be added. The toolbar item is available in the `userInfo` dictionary under the key `@"item"`.

`toolbarDidRemoveItem`:

Called just after a toolbar item is removed from a toolbar. The parameter is a notification posted by the toolbar. The object of this notification is the toolbar from which the item will be removed. The toolbar item is available in the `userInfo` dictionary under the key `@"item"`.

Example 3-4 shows how a toolbar delegate is implemented to create a simple toolbar.

### Example 3-4. Implementing a toolbar delegate

```
- (NSArray *)toolbarAllowedItemIdentifiers:(NSToolbar*)toolbar
{
    return [NSArray arrayWithObjects:@"Item1",
                     @"Item2",
                     NSToolbarSeparatorItemIdentifier,
                     NSToolbarSpaceItemIdentifier,
                     NSToolbarFlexibleSpaceItemIdentifier,
                     NSToolbarShowColorsItemIdentifier,
                     NSToolbarCustomizeToolbarItemIdentifier,
                     nil];
}

- (NSArray *)toolbarDefaultItemIdentifiers:(NSToolbar*)toolbar
{
    return [NSArray arrayWithObjects:@" Item1",
                     NSToolbarFlexibleSpaceItemIdentifier,
                     @"Item2", nil];
}

- (NSToolbarItem *)toolbar:(NSToolbar *)toolbar
       itemForItemIdentifier:(NSString *)itemIdentifier
       willBeInsertedIntoToolbar:(BOOL)flag
{
    NSToolbarItem *item = [[NSToolbarItem alloc]
                     initWithIdentifer:itemIdentifier];

    /*
     * If customize the item based on the identifier;
     * Standard toolbar items fall through and are returned
     */
     if ( [itemIdentifier isEqualToString:@"Item1" ) {
        [item setLabel:@"Do This"];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
        [item setAction:@selector(doThis)];
        [item setImage:[NSImage imageNamed:@"DoThis"]];
    } else if ( [itemIdentifier isEqualToString:@"Item12") {
        [item setLabel:@"Do That"];
        [item setAction:@selector(doThat)];
        [item setImage:[NSImage imageNamed:@"DoThat"]];
    }
    return [item autorelease];
}
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 3.9 Event Handling

Earlier in this chapter, you learned that `NSApplication`, `NSWindow`, and `NSView` share a common parent class: `NSResponder`. This class plays a central role in the AppKit event handling system, as it declares the interface to any class that can respond to events.

To handle events, it is often sufficient to understand how to create a suitable subclass of `NSResponder` (a custom view, for example) and implement the relevant methods (e.g., `mouseDown:`). The application framework is responsible for ensuring that the appropriate method is invoked on the right object.

The event handling architecture is built on three major ideas: *event messages*, *action messages*, and the *responder chain*. As discussed earlier, events enter an application through the window server and are dispatched by `NSApplication`, with the method `sendEvent:`, to forward the event to the appropriate object.

The event model also deals with action messages. Objects, usually interface controls, create actions within the application that can be routed to a target object. The method used to dispatch action messages is `NSApplication`'s `sendAction:to:from:`. The `sendAction:` parameter is a selector for the action method to be invoked in the target, the `to:` parameter is the action's target, and `from:` is the sender of the action. It is possible that the target is unspecified, in which case the action is sent up the full responder chain, and the first responder object that implements the message responds to it.

As for event handling, a window may be the *key window*, the *main window*, or both. At any point in time, there is only one key and one main window (they may be the same). `NSApplication` always sends mouse and key events to the key window. `NSWindow` implements the method `sendEvent:` to route the event to the proper view within the window. This view is the most tightly nested view withi the hierarchy over which the event occurred. If the view does not handle the event, then the event is sent to the view's *next responder*, which is usually its superview.

Action messages, on the other hand, are sent first to the key window's first responder, and follow the responder chain up to the window's content view. If no part of the responder chain handles the action, the window object and window delegate are given a chance to respond to the action. If the main window differs from the key window, the process repeats for the main window. Finally, if the main window and its responder chain do not respond to the action, the `NSApplication` object and its delegate are given a chance to respond. Thus, mouse and key events are always directed to the key window. If the key window is different from the main window, the main window is not given a chance to handle mouse and key events.

## 3.9.1 Event Objects

Every event responder method has the event object as its single argument. From this object, you car extract relevant information about the event, such as where the mouse is located in the window, or which key on the keyboard was pressed. Example 3-5 shows how to work with mouse-generated events.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### Example 3-5. Working with mouse events

```
- (void)mouseDown:(NSEvent *)theEvent
{
    NSPoint winLoc = [theEvent locationInWindow];
    NSPoint viewLoc = [self convertPoint:winLoc fromView:nil];
}
```

In this example, the `locationInWindow` method returns an `NSPoint` object, which gives the location of the event in the window's coordinate system. In the next line, you use the `NSView` method, `convertPoint:fromView:`, to convert the point from the coordinate system of one view to the coordinate system of the receiver. By passing `nil` as the second argument, you convert the point from the base coordinate system of the window to that of the receiver view.

Responding to keyboard events is similar, although the important characteristic is not the location, but the key that is pressed. Example 3-6 shows how to respond to key events. To discover which specific key was pressed, use the `characters` method.

### Example 3-6. Responding to key events

```
- (void)keyDown:(NSEvent *)theEvent
{
    NSString *key = [theEvent characters];

    if ( [key isEqualToString:@"c"] ) {
        // Handle event here for the 'c' key pressed
    }
}
```

## 3.9.2 The Responder Chain

The final piece of the event model-the glue that holds it all together-is the *responder chain*. The responder chain gives objects that may potentially respond to an event or action a chance to do so. This results in an extremely flexible response model, as the originator of the event or action is decoupled from the ultimate destination.

The responder chain is a series of linked `NSResponder` objects. When an event or an action occurs, it is dispatched to what is known as the first responder, which is given the first chance to respond to the event or action. If the first responder is incapable of responding, then the next responder object in the chain is given a chance to respond. Events and actions are sent up the responder chain until a object is found that can respond to the message. Typically the Application Kit picks the first responder automatically in response to normal user interaction with the interface. In other words, the object that is clicked or that receives typing is the first responder.

When constructing an interface in Interface Builder, you typically assign a specific object as the target for a control's action. Interface Builder provides a mechanism for actions to be sent to the responder chain, rather than a specific target object. This is done by connecting an object's action to the First Responder proxy object in the nib window.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

First Responder represents `nil`. If a control has a value for its target, it sends its action directly to that target. If the target is nil, this results in a "nil-targeted-action", denoting that the action should be passed to the responder chain (equivalent to passing nil as the message recipient in `NSApplication`'s `sendAction:to:from`:).

The responder chain pattern is especially convenient when your interface and controller classes are split among several nib files. Using the First Responder in Interface Builder lets you send actions fron a control in one nib to an object in another. This is common when working with document-based applications that have the main menu in one nib and the document interface and class in another.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 3.10 Document-Based Applications

Most applications create, manage, and edit documents. A document can be anything that stores persistent data. Moreover, these applications all duplicate common functionality, such as the ability to create new documents, open existing documents, and manage multiple open documents. Cocoa provides a multiple-document application architecture that implements most of the basic functionality shared by all document-based applications. Cocoa document-based application architecture centers on the `NSDocument`, `NSDocumentController`, and `NSWindowController` classes.

When developing a document-based application, most development effort is likely to be spent implementing subclasses of `NSDocument`; any document-based application must have at least one `NSDocument` subclass, but may have more (think of AppleWorks, for example). In MVC terminology, an `NSDocument` is a controller object; it manages a document's persistent data, and to project that data into a view. This means that minimally an `NSDocument` subclass must know how to load data into a form useable by the application, as well as how to store this data into a persistent form. A well implemented document subclass also provides support for printing, undo/redo operations, and edited status tracking.

An `NSDocumentController` instance is the administrator of a document-based application. It is responsible for servicing user requests to create, open, and save documents. `NSDocumentController` serves the integral role of the *document factory*. `NSDocument` knows how to load a file's contents as the document's data, and `NSDocumentController` knows how to create `NSDocument` objects under different circumstances. For example, File New is wired to tell `NSDocumentController` to create an instance of the application's `NSDocument` subclass with no initial data. When you choose a file via File Open, you tell `NSDocumentController` to create an instance of the document class and load the selected file's contents into that document.

If an application has more than one `NSDocument` subclass (say, to support different document and data formats), `NSDocumentController` knows which subclass to instantiate based on the requested document type. Document types are mapped to `NSDocument` subclasses in the application's *Info.plist*. Each subclass of `NSDocument` is tailored to support a different data model (i.e., file format). Instances of the document-based application architecture classes relate to one another in a multi-tier tree. At runtime, a document-based application has a single instance of `NSDocumentController` (accessed using the `sharedDocumentController` class method). This instance of `NSDocumentController` owns and manages zero, one, or more instances of `NSDocument`. Each `NSDocument` instance, in turn, owns and manages one or more instances of `NSWindowController`, which each own an instance of `NSWindow`. Figure 3-11 shows this arrangement.

Figure 3-11. The runtime relationship of NSDocumentController, NSDocument, NSWindowController, and NSWindow objects

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

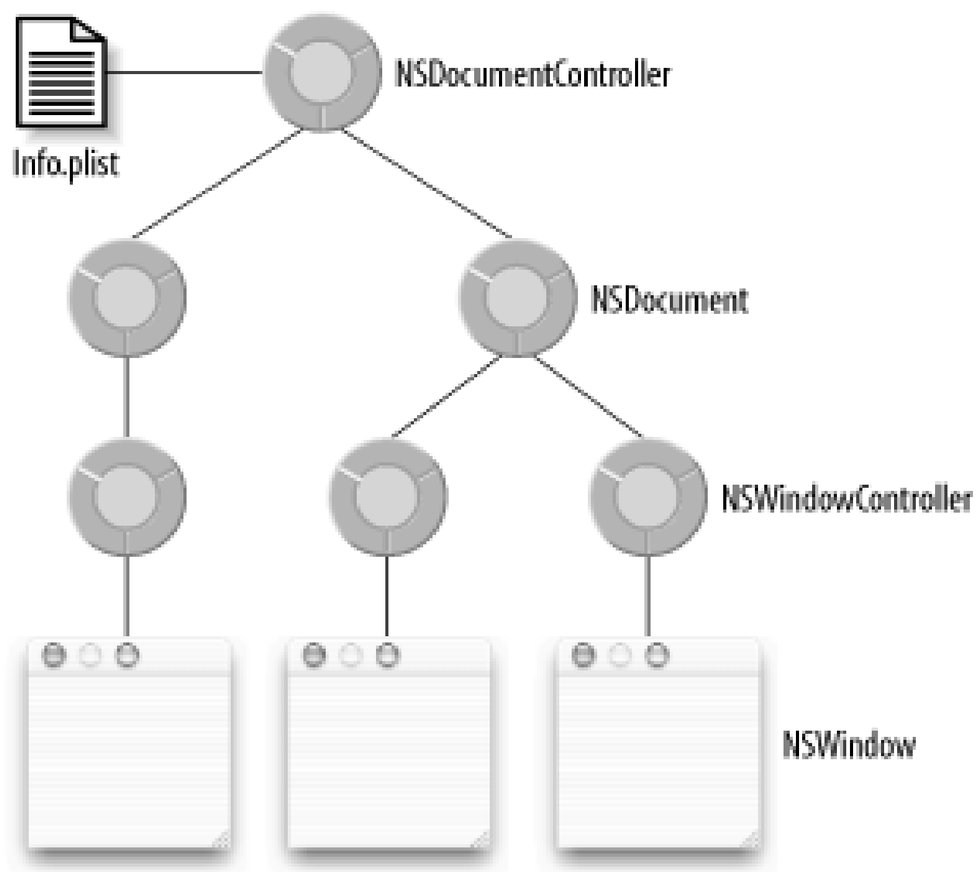


In simple document-based applications, where every document has just a single window, there may be no need to implement custom `NSWindowController` classes. The document architecture, however, allows you to create applications where there may be different or replicated views of the same data, e.g., a 3D drawing app where different windows may contain views and controls for wire frame, rendered and points-in-space representations; or a text editor where two windows might show different parts of the same file. In this variation of MVC, two controller classes work with together: `NSDocument` is the data model controller, and `NSWindowController` is the view controller. Your `NSDocument` subclass should manage the data model, and one or more subclasses of `NSWindowController` manage the windows that present the data.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 4. Drawing and Imaging

The Application Kit has a diverse set of graphics classes. These classes range from `NSQuickDrawView`, which lets developers use legacy graphics code based on the QuickDraw APIs in their Cocoa application, to `NSOpenGLView`, which provides a way to display OpenGL-based 3D graphics. The focus of this chapter, however, is on the 2D drawing and imaging classes that provide a high-level interface to Mac OS X's graphics system, Quartz. Table 4-1 enumerates the classes discussed in this chapter.

Table 4-1. Application Kit drawing and imaging classes

| Class | Description |
|---|---|
| `NSAffineTransform` | Defines an interface for creating and applying affine transforms that map points in one coordinate space to another |
| `NSBezierPath` | Draws PostScript-style lines and curves that enable the construction of arbitrary paths |
| `NSBitmapImageRep` | Interprets bitmapped image data, such as those stored as TIFF, BMP, GIF, JPEG, or PNG file types |
| `NSCachedImageRep` | Stores image data as a cached representation |
| `NSColor` | Represents a color as an object with support for several color spaces and color calibration |
| `NSCustomImageRep` | An image representation that allows the client to determine how the image is rendered |
| `NSEPSImageRep` | An image representation subclass that represents PostScript (EPS) formatted image data |
| `NSGraphicsContext` | Represents configurations for Quartz's graphics rendering engine and allows the client to determine how characteristics of graphics objects, such as Bezier paths, are rendered |
| `NSImage` | Stores and draws an image to screen |
| `NSImageRep` | Lets `NSImage` simultaneously represent an image's data in several formats defined by its six concrete subclasses |
| `NSPDFImageRep` | Represents image data stored as a PDF |
| `NSPICTImageRep` | Represents image data in Macintosh PICT format |



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 4.1 The Role of Quartz

Quartz is the foundation of Cocoa's 2D graphics capabilities. It provides many advanced graphics capabilities, including color management, path-based drawing, transparency, and anti-aliasing. It uses the same fundamental model of drawing as Adobe's Portable Document Format (PDF).

Quartz is actually two individual pieces of software in Mac OS X- *Quartz Compositor* and *Quartz 2D*. The Quartz Compositor is the underlying system service responsible for drawing the graphical user interface to screen from sources such as Quartz 2D, QuickTime, OpenGL, and QuickDraw. Quartz 2D, on the other hand, is an Application Programming Interface (API) for drawing and manipulating 2D graphics. This chapter concentrates on Quartz 2D's drawing functionality.

You can access the Quartz 2D API directly through the *CoreGraphics* framework, but it is far more convenient to use the Cocoa classes that provide an easy-to-use interface to Quartz, including `NSBezierPath`, `NSView`, `NSImage`, and `NSGraphicsContext`. These classes provide the functionality to render paths, text, and images to screen or to the printed page.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 4.2 Coordinate Systems

All drawing is performed within an instance of `NSView`. Each view defines its own *coordinate system*. By default, the origin (0, 0) is in the lower-left corner of the view with positive *y*-values extending up from, and positive *x*-values extending to the right of, the origin. Figure 4-1 illustrates this system.

Figure 4-1. View coordinate systems

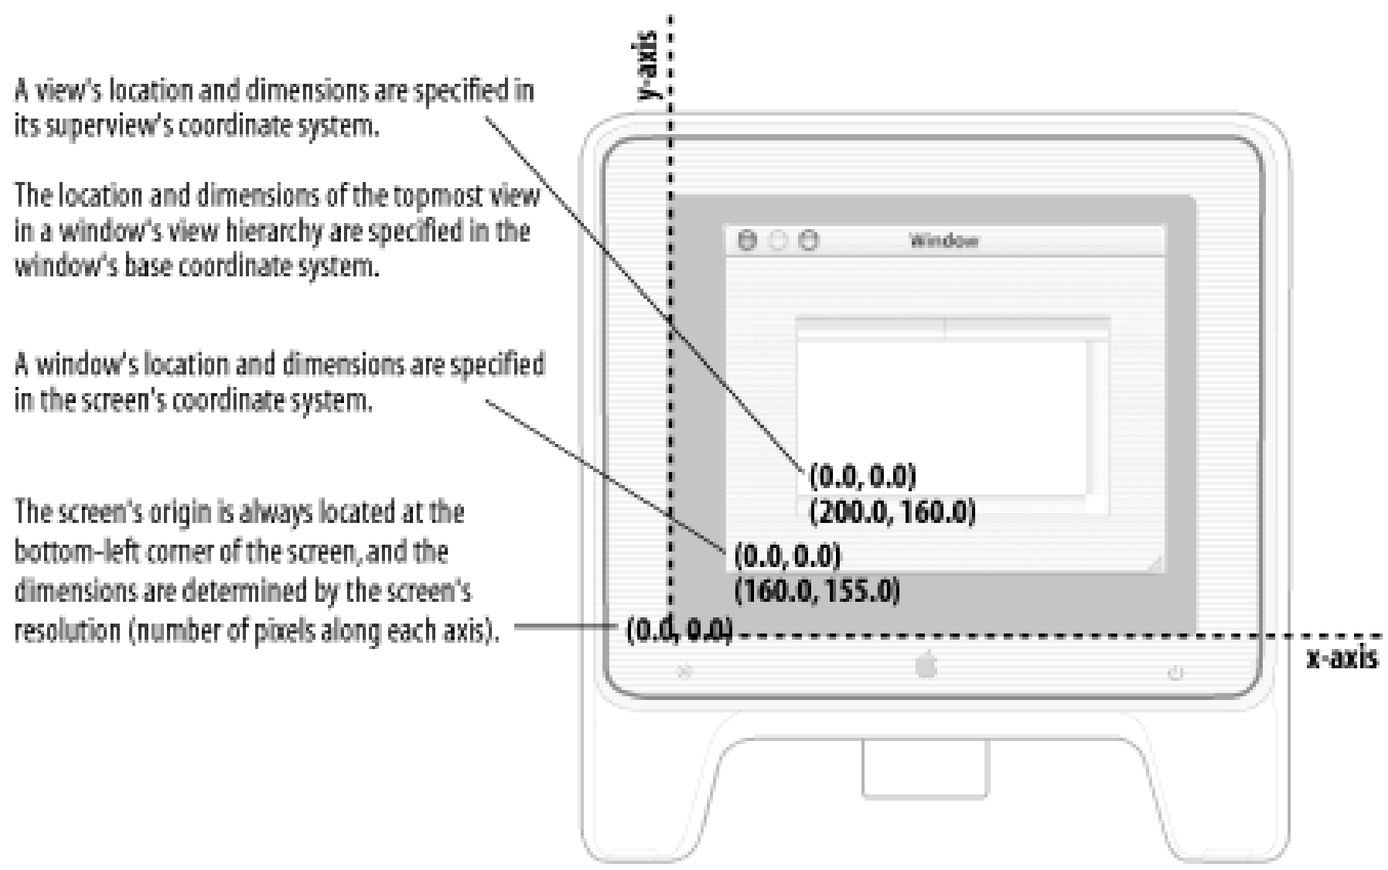


These coordinates are not tied to any particular output device, but are expressed in terms of points (a unit that is 1/72 of an inch). When Quartz renders graphics, it maps what is drawn in the device-independent coordinate system into the coordinate system of the device. One point is equivalent to one screen pixel.

As covered in Chapter 3, views are arranged in a nested hierarchy, with subviews contained within a superview. Two rectangles characterize a view. The size and position of a view within its superview is determined by its *frame rectangle*. The *bounds rectangle* defines the coordinate system within the view itself. By default, the origin of the bounds rectangle is at (0, 0), and it has the same height and width as the view's frame rectangle. You can access a view's frame using the methods `frame` and `setFrame:`, and access the bounds rectangle with `bounds` and `setBounds:`. Figure 4-2 shows how the frame and bounds rectangles are related.

Figure 4-2. The frame and bounds of a view

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

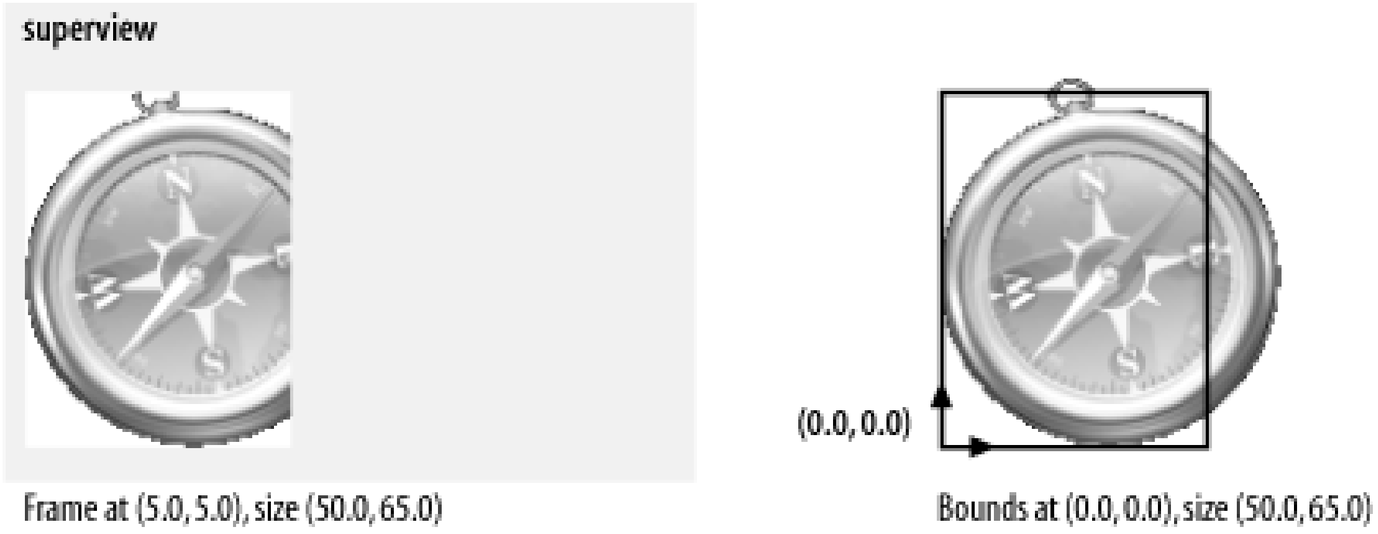


Resizing the bounds rectangle independently of the frame rectangle lets developers define coordinate systems that are natural for their application, instead of being forced to work in screen coordinates. Additionally, coordinate systems within a view may be translated and rotated independent of other coordinate systems.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 4.3 Graphics Contexts

A graphics context is a low-level component of the drawing system representing a destination for drawing commands that will be executed and rendered. Instances of the `NSGraphicsContext` class represent these contexts. The graphics context also provides an interface to manage graphics states and configure a number of rendering options, such as anti-aliasing, image interpolation, and various settings for drawing paths such as line width and join styles.

At any time in the execution of an application, a current context defines the graphics context for all graphics operations. You can obtain this object using the class method `currentContext`. Multiple graphics contexts are stored on a stack, so that different parts of an application may configure a context specific to their needs. To push a new context onto the stack, use the method `saveGraphicsState`. Contexts lower in the stack are restored by invoking `restoreGraphicsState`, which pulls the current context off the stack, making the next lower one current.

You can use a graphics context to determine whether or not the screen is the current drawing destination. This is useful if you have to handle onscreen and off-screen drawing differently (e.g., to printer). The `isDrawingToScreen` method returns `YES` if drawing is done onscreen, and `NO` otherwise. The convenience class method `currentContextDrawingToScreen` does the same thing, saving you the step of first invoking `currentContext`.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 4.4 Working with Paths

Drawing lines is the most basic function you can perform with Cocoa's drawing classes. The Application Kit encapsulates the low-level,Quartz path-based drawing API in the `NSBezierPath` class. Minimally, `NSBezierPath` lets you draw straight lines and Bezier paths, and using this functionality, you can construct any shape you like.

Bezier curves, or paths, are curved lines based on the mathematics of third-degree polynomials. Because Bezier paths are based on equations, they are resolution-independent and can be scaled to any size without the loss of detail or quality generally experienced with bitmapped graphics.

Drawing with `NSBezierPath` is in some respects similar to drawing on a sheet of paper with a pencil. Before you can draw a line, you have to place the pencil lead at a point on the page. Drawing a line requires moving the pencil from one point to another. To draw a disjointed line, you pick up the pencil tip from the paper and move it to another location. You might then complete a diagram by drawing a line back to the first point. These actions are reflected in the following`NSBezierPath` methods, used to construct a path:

- `moveToPoint:`
- `lineToPoint:`
- `curveToPoint:controlPoint1:controlPoint2:`
- `closePath`

The arguments to the first three methods are all of type`NSPoint`, a C structure that encapsulates a coordinate pair. Example 4-1 shows the `struct` declaration for `NSPoint`.

### Example 4-1. The NSPoint struct

```
typedef struct _NSPoint {
  float x;
  float y;
} NSPoint;
```

At any time, there is a current point. The method`moveToPoint:` moves the current point to the specified point. The methods `lineToPoint:` and `curveToPoint: controlPoint1:controlPoint2:` both extend a path from the current point.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Bezier curves (a subset of Bezier paths) are defined by two endpoints and two control points. The line segment connecting an end point to its control point is tangent to the curve at the end point and defines the path's direction. Figure 4-4, later in this chapter, shows the lines connecting each endpoint to their associated control point for the curve that makes up the bottom of the triangle.

Drawing with `NSBezierPath`s is fundamentally different from drawing with a pencil in that constructing a path is not the same as drawing a path. You can think of a path as an abstract representation that can be rendered into one, or many, views. `NSBezierPath` provides two methods to render a path: `stroke`, and `fill`. `stroke` draws the outline of the path, while the `fill` method fills the interior of the path with a color or pattern.

To illustrate this, consider Example 4-2, which draws the image shown in Figure 4-3.

### Example 4-2. Code to construct a complex shape using NSBezierPath

```
// The three vertices of a triangle
NSPoint p1 = NSMakePoint(100, 100);
NSPoint p2 = NSMakePoint(200, 300);
NSPoint p3 = NSMakePoint(300, 100);

// Control points
NSPoint c1 = NSMakePoint(200, 200);
NSPoint c2 = NSMakePoint(200, 0);

// Constructing the path for the triangle
NSBezierPath *bp = [NSBezierPath bezierPath];
[bp moveToPoint:p1];
[bp lineToPoint:p2];
[bp lineToPoint:p3];
[bp curveToPoint:p1 controlPoint1:c1 controlPoint2:c2];
[bp closePath];
[bp stroke];
```

Figure 4-3. The bold line shows the shape resulting from the path in Example 4-2 (the points are labeled with the variable names from Example 4-2)

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

For simple drawing, such as constructing rectangles or ellipses, `NSBezierPath` has two methods: `bezierPathWithRect:` and `bezierPathWithOvalInRect:`. Both methods take an `NSRect` as an argument. In the first method, the `NSRect` defines the constructed rectangle. In the second method, the specified rectangle determines the boundary of the ellipse. In addition to these two constructors, `appendBezierPathWithOvalInRect:` and `appendBezierPathWithRect:` add an ellipse or rectangle to an existing path.

You can also construct arcs with the following three methods:

- `appendBezierPathWithArcWithCenter:radius:startAngle:endAngle:clockwise:`
- `appendBezierPathWithArcWithCenter:radius:startAngle:endAngle:`
- `appendBezierPathWithArcFromPoint:toPoint:radius:`

These methods measure angles in degrees. The first draws an arc centered at the specified center point with a given radius. The arc extends from `startAngle:` to `endAngle:`, clockwise or counterclockwise, depending on the value of the clockwise argument. The second method is a wrapper around the first, where `clockwise:` is `NO`.

The third method, `appendBezierPathWithArcFromPoint:toPoint:radius:`, draws an arc from a circle that is inscribed within the angle specified by the current point in a path and the two points specified in the method. The parameter `radius:` specifies the radius of the circle used to build the arc. This method is more complicated than the other two, so it is illustrated by example. Example 4-3 shows the code used to build the path in Figure 4-4, shown with a bold line.

### Example 4-3. Drawing arcs

```
NSPoint p0 = NSMakePoint( 100, 100 );
NSPoint p1 = NSMakePoint( 100, 250 );
NSPoint p2 = NSMakePoint( 200, 250 );

path = [NSBezierPath bezierPath];
[path moveToPoint:p0];
[path appendBezierPathWithArcFromPoint:p1 toPoint:p2 radius:50];
[path stroke];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Figure 4-4. The bold line represents the path constructed in Example 4-3

### 4.4.1 Drawing to Views

To draw in a given view, you must first lock *focus* on the view by sending it a `lockFocus` message. Quartz interprets all subsequent drawing commands in the context of that view. Once the drawing is done, balance the `lockFocus` with a matching `unlockFocus` to the same view.

Custom drawing is implemented in a subclass of `NSView`. When subclassing `NSView`, all drawing code is called from an overridden `drawRect:` method. This method of `NSView` does nothing by default, but the `NSView` graphics system is set up to automatically invoke this method at the appropriate times.

While `drawRect:` does the drawing work, it should never be invoked directly. Instead, to force an immediate redraw of a view, you can send a `display` message to the view. This causes the receiver to lock its focus, invoke `drawRect:`, and then unlock its focus before returning control to the caller. To this end, `display` is functionally similar to the implementation shown in Example 4-4.

Example 4-4. Functional implementation of NSView's display

```
- (void)display
{
  [self lockFocus];
  [self drawRect:[self bounds]];
  [self unlockFocus];
}
```

However, `display` is still not the interface you usually use to tell a view to redraw its contents. A better method of redrawing tells the view that the contents have changed and lets the view redraw itself the next time through the run loop. You do this by sending the view a `setNeedsDisplay:` message, with the argument `YES` to indicate that the view should invoke `display` in the next run loop pass. If you want to cancel a drawing request, invoke this method passing `NO`. This allows Quartz to decide the proper time to redraw the contents of a view.

In some circumstances it may be more efficient still to send the view a `setNeedsDisplayInRect:` message, where the argument is a "dirty" area that needs to be updated. The display system can then determine what rectangle to pass as the argument to a view's `drawRect:`. In your drawing code, you then ensure that you only update parts of the view that need to be refreshed. Other methods used to cause view updates include:

```
- (void)displayIfNeeded;
- (void)displayIfNeededIgnoringOpacity;
- (void)displayRect:(NSRect)rect;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)displayIfNeededInRect:(NSRect)rect;
- (void)displayRectIgnoringOpacity:(NSRect)rect;
- (void)displayIfNeededInRectIgnoringOpacity:(NSRect)rect;
```

## 4.4.2 Line Attributes

`NSBezierPath` lets you change several path-rendering options, such as the line thickness, join style, dash count, miter limit, cap style, and winding rules. You can change a path's attributes with a class method or an instance method. The instance method changes the attributes of only the receiving instance, while the class method changes the default attribute for all instances in the graphics context.

For example, to change the width of a line, use either `setLineWidth:` or `setDefaultLineWidth:`. The first changes the line width of the instance to which you send that particular method, while the second class method sets the line width in the graphics context that applies to subsequent renderings of any instance of `NSBezierPath`.

`NSBezierPath` provides methods for changing the following attributes:

- Line width
- Path flatness
- Line dashes and phase
- Line cap style
- Line join style
- Miter limit
- Winding rule

You can change any of these attributes for a single instance or for the graphics context, as shown earlier.

### 4.4.2.1 Path flatness

Flatness is one attribute that can be set for a curve. A path's *flatness* indicates to the rendering engine how accurately it should reproduce the curve; that is, the flatness is a metric of the curve's granularity or resolution as it is rendered. A higher flatness value corresponds to a rougher curve, which can be rendered more quickly; a lower value corresponds to a smoother curve, which comes at the expense of rendering time. Figure 4-5 shows a curve that is stroked with the default flatness of 0.6, and again with a larger flatness of 100 using a thicker line. Example 4-5 shows the code you need to change the flatness.

#### Example 4-5. Changing the flatness of a Bezier path

```
- (void)drawRect:(NSRect)aRect
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
{
    NSBezierPath *path = [NSBezierPath bezierPath];

     [path moveToPoint:NSMakePoint(0, 200)];
     [path curveToPoint:NSMakePoint(500, 200)
          controlPoint1:NSMakePoint(500, 800)
          controlPoint2:NSMakePoint(0, -400)];

     [path setFlatness:100];
    [path stroke];
}
```

Figure 4-5. The thinner, smooth curve has a default flatness of 0.6; the thicker curve has a flatness of 100

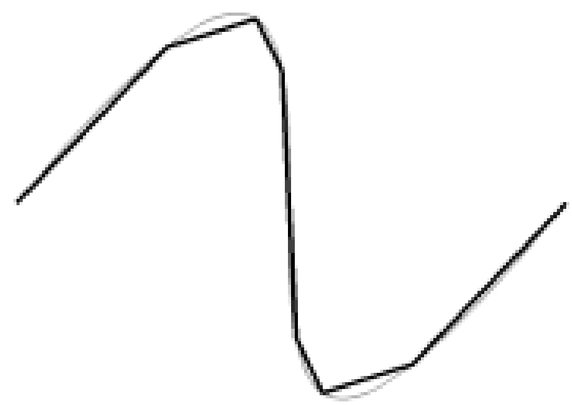

How jagged a curve appears depends on the flatness and the absolute size of the curve. Endpoints of the curve in Figure 4-5 are 500 pixels apart; if the absolute size of the curve were 10 times as large, a flatness of 100 would create less dramatic jaggedness.

Related to setting the flatness of a rendered curve is the method `bezierPathByFlatteningPath`. This method returns a Bezier path that represents the receiver with all curves approximated as a series of straight lines similar to how changing the flatness renders the curve.

### 4.4.2.2 Line dashes and phase

The method `setLineDash:count:phase:` takes three parameters to define a dash pattern for a stroked Bezier path. The first argument is a C array of `float`s that specifies the lengths of alternating stroked and unstroked segments. The second argument indicates the number of elements in the dash pattern array. The final argument indicates where in the dash pattern drawing begins. Consider the three dash patterns in Example 4-6 and the resulting lines in Figure 4-6.

Example 4-6. The code used to generate three dashed lines

```
float pattern1[2] = {50.0, 25.0};
float pattern2[3] = {50.0, 25.0, 75.0};

// The top line in Figure 4-6
[aPath setLineDash:pattern1 count:2 phase:0];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// The middle line in Figure 4-6
[aPath setLineDash:pattern2 count:3 phase:0];

// Bottom line in Figure 4-6
[aPath setLineDash:pattern1 count:2 phase:25];
```

Figure 4-6. Line dash patterns: each line is 400 points long with a line thickness of 10 points

### 4.4.2.3 Line cap style

You can render Bezier paths with several line cap styles, which are set using either `setLineCapStyle:` or `setDefaultLineCapStyle:`. The line cap style `NSButtLineCapStyle` makes the ends of the rendered line flush with the end of the path. `NSRoundLineCapStyle` renders the line with a radius equal to half the thickness of the line, centered at the end of the path. Finally, `NSSquareLineCapStyle` extends the line past the end of the path by a length equal to half of the line width. The default line cap style is `NSButtLineCapStyle`. Figure 4-7 shows various line cap styles on a path that is 200 pixels long and a width of 30 pixels; the white line indicates the path to highlight the position of the endpoints (which is critical when discussing the differences between `NSButtLineCapStyle` and `NSSquareLineCapStyle`).

Figure 4-7. Line cap styles

### 4.4.2.4 Line join styles

Another property of Bezier paths is the way lines are joined. You can set this property for path objects with `setLineJoinStyle:`, or set it for the graphics context with `setDefaultLineJoinStyle:`. The default line join style is `NSMiterLineJoinStyle`, in which the outside edges of the lines are extended to a sharp point. You can also create rounded and beveled line join styles using the constants `NSRoundLineJoinStyle` and `NSBevelLineJoinStyle`. Figure 4-8 shows examples of the three lines join styles.

Figure 4-8. From left to right: NSMiterLineJoinStyle, NSRoundLineJoinStyle, and NSBevelLineJoinStyle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### 4.4.2.5 Miter limit

Miter join styles have a special problem: the join appears as a spike when the angle between the two joined lines is extraordinarily acute (since the join is rendered by extending the outer line edges outward until they meet). To prevent this problem, the graphics context has a *miter limit* that defines a threshold for how small an angle can be before the line join style is changed to a bevel joint. The miter limit is the ratio of the miter length (the diagonal length of the miter extension) to the line width; by default, this is value is 10. To alter this value, use `NSBezierPath`'s class method `setDefaultMiterLimit:`, or the instance method `setMiterLimit:`.

Figure 4-9 illustrates a small-angle joint. The joint with the miter join style is drawn with the default miter limit of 10, while the miter limit that produces the bevel joint is reduced to 6. In each example, the line thickness is 20 and the angle between the two lines is about 9.5 degrees.

Figure 4-9. The effect of the miter limit

### 4.4.2.6 Winding rule

When filling a path, there is another graphics context characteristic to consider: the winding rule. For simple paths such as rectangles and circles, the region that should be filled is unambiguous. However, for complex paths, such as a star with many intersecting line segments, the area that should be filled is less clear. Thus, winding rules are used to determine which regions of a complex intersecting path should be filled.

The two winding rules are *non-zero* (the default) and *even-odd*. The even-odd winding rule works by taking a test point within the region and counting the number of times a ray extending from that point crosses the path. If the number of crossings is odd, then the point is considered "inside" the shape, and its region will be filled. If the number of crossing is even, then the point is considered "outside" the shape, and its enclosing region is not filled.

The non-zero winding rule counts crossings based on the direction of the crossed path. A ray extending from the test point increments its crossing count when it crosses a left-to-right path; it decrements its crossing count when crossing a right-to-left path. If the number of crossings is 1, then the point is "inside;" if the number of crossings is zero, then the point is "outside." Figure 4-10 shows an example of these two winding rules at work.

Figure 4-10. Stars illustrating (from left) the path with no fill, the default non-zero winding rule, and the even-odd winding rule

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 4.5 Drawing Text

For many applications that use text, AppKit's NSTextField or NSTextView classes are sufficient. However, when you need to draw text as part of some custom graphics, you may want to use Cocoa's string drawing functionality, provided by AppKit's extensions to the NSString and NSAttributedString.

The Application Kit adds three methods to the NSString class-drawAtPoint: withAttributes:, drawInRect:withAttributes:, and sizeWithAttributes:-that let you draw strings in views easily. The string being drawn is placed in the view to locate the upper-left corner of its bounding box at the point specified in drawAtPoint:withAttributes:. When using drawInRect:withAttributes:, the text is drawn within the rectangle. If the bounding box of the string is larger than the rectangle, then the string is clipped.

## 4.5.1 Attributed strings

Attributes are associated with a string by the Foundation class NSAttributedString. Table 4-2 enumerates these attributes.

Table 4-2. Standard Cocoa attributes for NSAttributedString

| Attribute identifier | Type | Default value |
|---|---|---|
| NSAttachmentAttributeName | NSTextAttachment | No default |
| NSBackgroundColorAttributeName | NSColor | No default |
| NSBaselineOffsetAttributeName | NSNumber | 0.0 |
| NSFontAttributeName | NSFont | Helvetica 12 points |
| NSForegroundColorAttributeName | NSColor | Black |
| NSKernAttributeName | NSNumber | 0.0 |
| NSLigatureAttributeName | NSNumber | 1 |
| NSLinkAttributeName | id | No default |
| NSParagraphAttributeName | NSParagraphStyle | [NSParagraphStyle defaultParagraphStyle] |
| NSSuperscriptAttributeName | NSNumber | 0 |
| NSUnderlineStyleAttributeName | NSNumber | 0 |

To create an attributed string, initialize the string with text and assigning to it any of the attributes

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

listed in Table 4-2. Any combination of attributes may be assigned to any subset of characters. For example, the first half of an attributed string might use Lucida Grande with 12-point type, while the second half could use 24-point Tengwar.

Once you have set up the attributes of the string satisfactorily, the string can be drawn in the currently focused view by sending it either a `drawAtPoint:` or `drawInRect:` message. These methods are AppKit extensions to `NSAttributedString`. These methods work in the same way as the `NSString` extensions discussed previously. You can also determine the size of the bounding box by sending a `size` message to the attributed string.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 4.6 Working with Color

Colors in the Application Kit are represented by instances of the `NSColor` class, which provides an interface for creating colors and setting the color used by the current graphics context. AppKit supports several color spaces that fall into three categories:

*Device-dependent*

Color spaces support colors that may appear differently on different devices (such as a color printer or monitor).

*Device-independent*

Colors are calibrated so they appear the same on any output device.

*Named*

Color spaces represent colors that don't correspond to numerical values, but are referenced in a catalogue of named colors.

The six color spaces supported by the Application Kit are based on these three categories, as detailed in Table 4-3.

Table 4-3. Color spaces supported by the Application Kit

| Color space name | Description |
|---|---|
| `NSDeviceCMYKColorSpace` | Cyan, magenta, yellow, black, and alpha components |
| `NSDeviceRGBColorSpace` | Red, green, blue, and alpha components; or hue, saturation, brightness, and alpha components |
| `NSCalibratedRGBColorSpace` | Red, green, blue, and alpha components; or hue, saturation, brightness, and alpha components |
| `NSDeviceWhiteColorSpace` | White and alpha components (grayscale) |
| `NSCalibratedWhiteColorSpace` | White and alpha components (grayscale) |
| `NSNamedColorSpace` | Catalog name and color name components |

The color spaces that are `NSDevice`... are device-dependent color spaces, while those that are `NSCalibrated`... color spaces are device-independent. Table 4-3 lists constant names defined by AppKit to identify color spaces in code.

To create an instance of `NSColor`, use any `colorWith`... class method that takes component values for the color spaces indicated by the method name, such as `colorWithCalibratedRed:green:blue:alpha`. The parameters passed to these methods as component values are floats ranging between 0 and 1. Values that fall below 0 are interpreted as

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

black, and those above 1 are interpreted as the pure color. Several class methods are also named after colors, such as redColor and blueColor. These methods return an instance of NSColor whose components are set for the specified color and whose color space isNSCalibratedRGBColorSpace.

Example 4-7 shows different ways to create color objects.

### Example 4-7. Various ways to create color objects

```
NSColor *c;

// Apple-menu blue in RGB colorspaces
c = [NSColor colorWithCalibratedRed:0.243 green:0.505
             blue:0.863 alpha:1.0];

// Same color in CMYK colorspace
c = [NSColor colorWithDeviceCyan:0.76 magenta:0.50
yellow:0.14 black:0.0 alpha:1.0];
```

NSColor's set method sets the receiver as the current graphics context's color. All subsequent drawing is done in the color that was last set. By default, all drawing is done in black.Example 4-8 demonstrates how this is done in a drawRect: method.

### Example 4-8. Setting the color of a graphics context and rendering a path

```
- (void)drawRect:(NSRect)rect
{
  // Construct path

  [[NSColor greyColor] set];
  [bp fill];

  [[NSColor blackColor] set];
  [bp stroke];
}
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 4.7 Working with Images

NSImage and NSImageRep are Cocoa's image-handling workhorses. NSImage provides a convenient and easy-to-use frontend to a powerful and flexible backend comprised ofNSImageRep's many subclasses. NSImage provides a high level interface for loading, saving, and drawing images onscreen. NSImageRep and its subclasses, on the other hand, provide interfaces for working with specific image formats.

## 4.7.1 NSImage

NSImage provides the high-level interface for working with images, which includes the ability to load and save images and draw them to screen. With NSImage, you don't need to worry about image formats, which are handled internally by NSImage and the NSImageRep set of classes. To initialize instances of NSImage use these methods:

- initByReferencingFile:
- initByReferencingURL:
- initWithContentsOfFile:
- initWithContentsOfURL:
- initWithData:
- initWithPasteboard:
- initWithSize:

When you initialize anything by reference, as with the first two methods, the data is not loaded until the object actually needs it. This contrasts withinitWithContents...., which loads the data and initializes the object immediately. The last method,initWithSize:, initializes an empty image.

imageNamed: is a useful method for creating image objects with images contained in the application bundle. With this method, you don't have to provide a path to the file or include the file extension in the name-NSImage knows where to find it within the bundle.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

# NSImageView

NSImageView is a subclass of NSControl, and as such, is related to the interface as a control, rather than to graphics, as its name suggests. NSImageView is a small extension to NSControl that lets you display an image. You can set various attributes, such as how the image should scale to fit in the view (i.e., no scaling, proportionally, or stretched) or how it should be aligned in the view (left, right, center, etc.). One of NSImageView's most useful features is its ability to be dragging source and destination; that is, you can drag the image from the view to some other application or document, and when properly implemented, you can drag an image to be displayed in the view.

### 4.7.1.1 Compositing

You can also use NSImage to composite images to the screen through Quartz. Earlier in the chapter, we saw that all drawing had to be done within the locked focus of an NSView. Like NSView, NSImage interacts directly with Quartz to accomplish drawing. Compositing combines a source image, your NSImage object, with a destination image, the existing image displayed on the screen, according to a given operation. Table 4-4 lists the various compositing operations.

Table 4-4. Compositing operations and constants

| Operation | Effect on destination image |
|---|---|
| NSCompositeClear | Makes the destination transparent. |
| NSCompositeCopy | Copies the source image over to the destination image. |
| NSCompositeDestinationAtop | Draws the destination image wherever both the source and destination images are opaque, and shows the source image wherever the source image is opaque and destination image is transparent. If the overlapping regions of both images are transparent, the composited image is transparent. |
| NSCompositeDestinationIn | Draws the destination image where overlapping regions of both images are opaque, and is transparent everywhere else. |
| NSCompositeDestinationOut | Draws the destination image wherever it is opaque but the source image is transparent, and transparent elsewhere. |
| NSCompositeDestinationOver | Draws the destination image wherever it is opaque, and draws the source image elsewhere. |
| NSCompositePlusDarker | Draws the sum of the destination and source images, with summed color values approaching 0 (black). |
| NSCompositePlusLighter | Draws the sum of source and destination images with summed color values approaching 1 (white). |

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| Operation | Effect on destination image |
|---|---|
| NSCompositeSourceAtop | Draws the source image wherever both images are opaque, draws destination image wherever destination image is opaque but source is transparent, and transparent elsewhere. |
| NSCompositeSourceIn | Draws the source image wherever both images are opaque, and transparent elsewhere. |
| NSCompositeSourceOut | Draws the source image wherever it is opaque but the destination is transparent, and draws transparent elsewhere. |
| NSCompositeSourceOver | Draws the source image wherever it is opaque, and destination elsewhere. |
| NSCompositeXOR | Draws the exclusive OR of the source and destination image. Works only with black and white images and is thus not recommended for use in color contexts. |

The Developer Tools installation includes several sample applications that demonstrate various aspects of the available frameworks. CompositeLab, found in */Developer/Examples/AppKit/CompositeLab*, lets you combine two images with any of the compositing operations listed in Table 4-4; the result is immediate, and you can easily experiment with NSImage compositing. The source code is also available, so you can see how it's implemented. Figure 4-11 shows CompositeLab in action.

Figure 4-11. The CompositeLab demo application

You can composite an NSImage to screen with any of the following methods:

- compositeToPoint:operation:
- compositeToPoint:fromRect:operation:
- compositeToPoint:fromRect:operation:fraction:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

- `compositeToPoint:operation:fraction`:

In each method, the `operation`: argument is one of the constants given in Table 4-4. The first argument, `compositeToPoint`:, is an `NSPoint` structure indicating where the origin of the image should be placed in the coordinate system of the view whose focus is currently locked; the origin is the lower-left corner of the image. By using a method with a `fromRect`: parameter, you can specify a cropped portion of the source image to be composited to the point. Finally, the `fraction`: parameter seen in the last two methods in the list indicates the degree of blending that should occur between the source image and the destination image. This parameter is useful, for example, in an application in which you need to cross-fade between two images, as is often seen in Aqua. The following two methods are also useful for this task:

- `(void)dissolveToPoint:fraction`:
- `(void)dissolveToPoint:fromRect:fraction`:

You can also use the following two methods to draw animage:

- `drawAtPoint:fromRect:operation:fraction`:
- `drawInRect:fromRect:operation:fraction`:

These methods differ from the compositing methods because they consider the rotation and scaling of the destination coordinate system, drawing the image with the appropriate scaling and rotation applied. The `fromRect`:, `operation`:, and `fraction`: parameters behave as compositing methods.

Example 4-9 demonstrates how to create an `NSImage` and composite it to a point on screen using the `NSCompositeCopy` operation.

### Example 4-9. Using NSImage

```
// Use a named image
NSImage *image = [NSImage imageNamed:@"buttonImage"];
[image compositeToPoint:NSZeroPoint operation:NSCompositeCopy];
```

### 4.7.1.2 Drawing into an image

Compositing an image is considerably faster than rendering a Bezier path or drawing text. Many graphics are static, which means that you don't have to necessarily reconstruct and render a path every time a view is redrawn. Applications can take advantage of the capability to make an instance of `NSImage` a drawing destination (rather than a view). You can draw a path to an image, and then composite this image to the view. The advantage is that the path need only be rendered once, since redrawing the view involves compositing only the image containing the rendered path. Example 4-10 shows how to accomplish this.

### Example 4-10. Drawing to an image

```
NSImage *image = [[NSImage alloc] initWithSize:NSMakeSize( 400, 400 )];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Lock focus of image, make it a destination for drawing
[image lockFocus];

// Set background color to white
[[NSColor whiteColor] set];
NSRectFill( NSMakeRect( 0, 0, 400, 400 )));

// Construct and draw path as you would in drawRect:
[self drawMyPath];
[image unlockFocus];

// Now draw in a view by compositing
[image compositeToPoint:NSZeroPoint operation:NSCompositeCopy];
```

## 4.7.2 NSImageRep

The relationship between `NSImage` and `NSImageRep` in the Application Kit is powerful and has important architectural ramifications. `NSImage` provides a high-level interface to Cocoa's image manipulation capabilities by defining functionality that is independent of the image's data format. Thi functionality includes drawing and compositing, which was discussed previously, as well as tasks sucl as loading and saving image data (which may seem to depend on the data's format, but is implemented in a way that hides the details from clients) and setting/getting attributes of the image such as its display size.

A browse through `NSImage`'s methods reveals that many are used to manage image representations. Image representations are instance of subclasses of `NSImageRep`; they are bridges between the high-level abstraction of `NSImage` and the image's data-dependent representation. That is, `NSImageRep` and its subclasses let `NSImage` work with multiple formats of data, ranging from EPS and PDF formats to the most prevalent bitmapped image data formats.

AppKit provides six subclasses of `NSImageRep`; they were described in Table 4-1, and are listed again as follows:

- `NSPDFImageRep`
- `NSEPSImageRep`
- `NSPictImageRep`
- `NSCachedImageRep`
- `NSCustomImageRep`
- `NSBitmapImageRep`

A key feature in the `NSImage`/`NSImageRep` relationship is that `NSImage` usually stores and uses multiple instances of `NSImageRep`. Some image representations, such as `NSEPSImageRep` or `NSPDFImageRep`, are well suited for printing, while others are better suited for onscreen display. For example, it might be best for a bitmap image representation to display an image to a full-color screen, while an EPS image representation would be better suited for output to a PostScript printer due to the ability of EPS to reproduce high resolution graphics.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

By keeping multiple image representations handy, a single instance of `NSImage` can adapt to a variety of display situations, including the ability to adapt to various color depths and output resolutions.

`NSImageRep` provides a base implementation for image representations that lets you determine many image properties, such as the number of bits in each pixel sample, whether or not the image has an alpha (transparency) channel, the size of the image in pixels, and the name of the color space for the image. Equivalent methods set these image representation properties.

With `NSImageRep`, you can also draw the image to a view as you can in `NSImage` by using the `draw`, `drawAtPoint:`, and `drawInRect:` in `NSImageRep` methods. Most importantly, several class methods let you create an image rep instance from various data sources, such as a file, URL, an `NSData` object, and even the pasteboard.

Two categories of class methods create new image representations. The methods that begin with `imageRep...` return an image rep object that most appropriately represents the given data. They are:

- `imageRepWithContentsOfFile:`
- `imageRepWithPasteboard:`
- `imageRepWithContentsOfURL:`

Another set of these convenience constructors include:

- `imageRepsWithContentsOfFile:`
- `imageRepsWithPasteboard:`
- `imageRepsWithContentsOfURL:`

These methods return an array of `NSImageRep` objects that are initialized with data from the specified source.

Also of note are the set of class methods that include:

- `imageRepClassForData:`
- `imageRepClassForFileType:`
- `imageRepClassForPasteboardType:`

These methods return the class object for the `NSImageRep` subclass that best represents the given data.

`NSImage` provides several methods that manage image representations used by the image object. The methods, `addRepresentation:` and `addRepresentations:`, are add image representations to an image. The first takes a single `NSImageRep`, and the second takes an array of `NSImageRep` instances. You can find the representations managed by an image by invoking the method `representations` and remove a representation by using `removeRepresentation:`.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### 4.7.3 NSBitmapImageRep

Bitmapped graphics are the types of images you will probably use most. The `NSBitmapImageRep` class recognizes the following image file formats:

- TIFF
- BMP
- JPEG
- PNG
- Raw image data

Like its parent class, `NSBitmapImageRep` includes methods that initialize an instance from existing data. To create an empty image data buffer from scratch that creates new images, use the method shown in Example 4-11.

#### Example 4-11. Creating an empty image data buffer

```
- (id)initWithBitmapDataPlanes:(unsigned char **)planes
      pixelsWide:(int)width
      pixelsHigh:(int)height
      bitsPerSample:(int)bps
      samplesPerPixel:(int)spp
      hasAlpha:(BOOL)alpha
      isPlanar:(BOOL)isPlanar
      colorSpaceName:(NSString *)colorSpaceName
      bytesPerRow:(int)rowBytes
      bitsPerPixel:(int)pixelBits
```

With over 125 characters in the method name, this is the longest public method name in Cocoa.

You can use the method shown in Example 4-11 to initialize a new blank instance of `NSBitmapImageRep` with the given properties. Then use either `bitmapData` or `getBitmapDataPlanes:` (which one you use depends on whether you passed `YES` or `NO` as the `isPlanar:` argument) to access the data buffers where the actual image data is stored, to give you the means to manipulate bitmap images byte-by-byte. The former returns a pointer of type `unsigned char *`, and the latter takes an `unsigned char **` pointer, which is set to the beginning of the planar (2D) image data. Example 4-12 shows how to manipulate an image's data to invert the image's colors.

#### Example 4-12. Manipulating an image's data on a byte level

```
// srcImageRep is the NSBitmapImageRep of the source image
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
int n = [srcImageRep bitsPerPixel] / 8;            // Bytes per pixel
int w = [srcImageRep pixelsWide];
int h = [srcImageRep pixelsHigh];
int rowBytes = [srcImageRep bytesPerRow];
int i;

NSImage *destImage = [[NSImage alloc] initWithSize:NSMakeSize(w, h)];
NSBitmapImageRep *destImageRep = [[[NSBitmapImageRep alloc]
      initWithBitmapDataPlanes:NULL
          pixelsWide:w
          pixelsHigh:h
          bitsPerSample:8
          samplesPerPixel:n
          hasAlpha:[srcImageRep hasAlpha]
          isPlanar:NO
          colorSpaceName:[srcImageRep colorSpaceName]
          bytesPerRow:rowBytes
          bitsPerPixel:NULL] autorelease];

unsigned char *srcData = [srcImageRep bitmapData];
unsigned char *destData = [destImageRep bitmapData];

for ( i = 0; i < rowBytes * h; i++ )
    *(destData + i) = 255 - *(srcData + i);

[destImage addRepresentation:destImageRep];
```

This example works by first creating a new instance of `NSBitmapImageRep` with the properties you want out of the image. Since the properties will be the same as the source image, use several `NSBitmapImageRep` methods to determine those properties and use them in the initialization of `destImageRep`. Next, in the for-statement, use C pointer arithmetic to traverse the buffers obtained immediately before the for-loop, and do the math necessary to invert the image. In this case, subtract the value of each source pixel from 255 and store the result as the value of the destination pixel. Finally, finish things off by adding `NSBitmapImageRep`'s `destImageRep` to `NSImage`'s `destImage`. This is a common paradigm for working with bitmap image data in which only the algorithms limit you to operating on the image data.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 4.8 Transformations

NSAffineTransform provides an interface for defining and applying affine transforms to various parts of the graphics system, such as view coordinate systems, individual Bezier paths orNSPoints. An affine transform is a type of mapping between coordinate systems in which a shape's parallel lines are preserved, but not necessarily the length of line segments or the angles between lines. Out-of-the-box, NSAffineTransform is capable of rotating, translating, and scaling.

To create an affine transform, use the transform convenience constructor. The following example shows how you can create an affine transform object and make a rotation transformation:

```
NSAffineTransform * at = [NSAffineTransform transform];
[at  rotateByDegrees:77];
```

To transform a Bezier path using this affine transform object, invoketransformBezierPath:

```
NSBezierPath *newPath = [at transformBezierPath:bp];
```

This method takes the Bezier path to transform as a parameter and returns a new Bezier path that is the transformation of the original. Using a method ofNSBezierPath, you can transform a path directly without having a new object returned. The method istransformUsingAffineTransform:, and is used in the following way:

```
[bp  transformUsingAffineTransform:rat];
```

Here is how you transform an NSPoint structure:

```
at = [NSAffineTransform transform];
[at  translateXBy:100  yBy:50];
NSPoint point = NSMakePoint( 0, 0 );
NSPoint newPoint = [at transformPoint:point];
```

To transform an NSSize, do the following:

```
at = [NSAffineTransform transform];
[at  scaleXBy:0.5  yBy:1.5];
NSSize size = NSMakeSize( 100, 100 );
NSSize newSize = [at transforSize:size];
```

The beginning of this chapter discussed graphics contexts and how they control drawing destination properties. One of these properties is a global transformation matrix that is the concatenation of all scaling, translation, and rotation applied by windows and views between and including the screen and the current view.

NSAffineTransform implements two methods that let you alter the graphic context's transformation matrix: set and concat. The first, set, lets you replace the current context's transformation matrix. This is usually not a good idea, since the replacement destroys all information about transformations between windows and views. The other,concat, appends the transformation represented by the

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

receiver to the current context's transformation. All drawing operations subsequent to the invocation of either method have the new transformation applied. Be sure to save the current context before using these methods, and restore that context whenever you complete a drawing operation.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 5. Text Handling

Cocoa's text system contains a rich set of features such as text input, layout, display, editing, copying and pasting, and font management. It also includes support for advanced typesetting features such as kerning and ligature, multilingual support with Unicode, and sophisticated layout capabilities.

This chapter discusses the primary classes of Cocoa's text handling system and how they relate to one another. Figure 5-1 shows the hierarchy of classes related to the text system.

Figure 5-1. Hierarchy of text system class

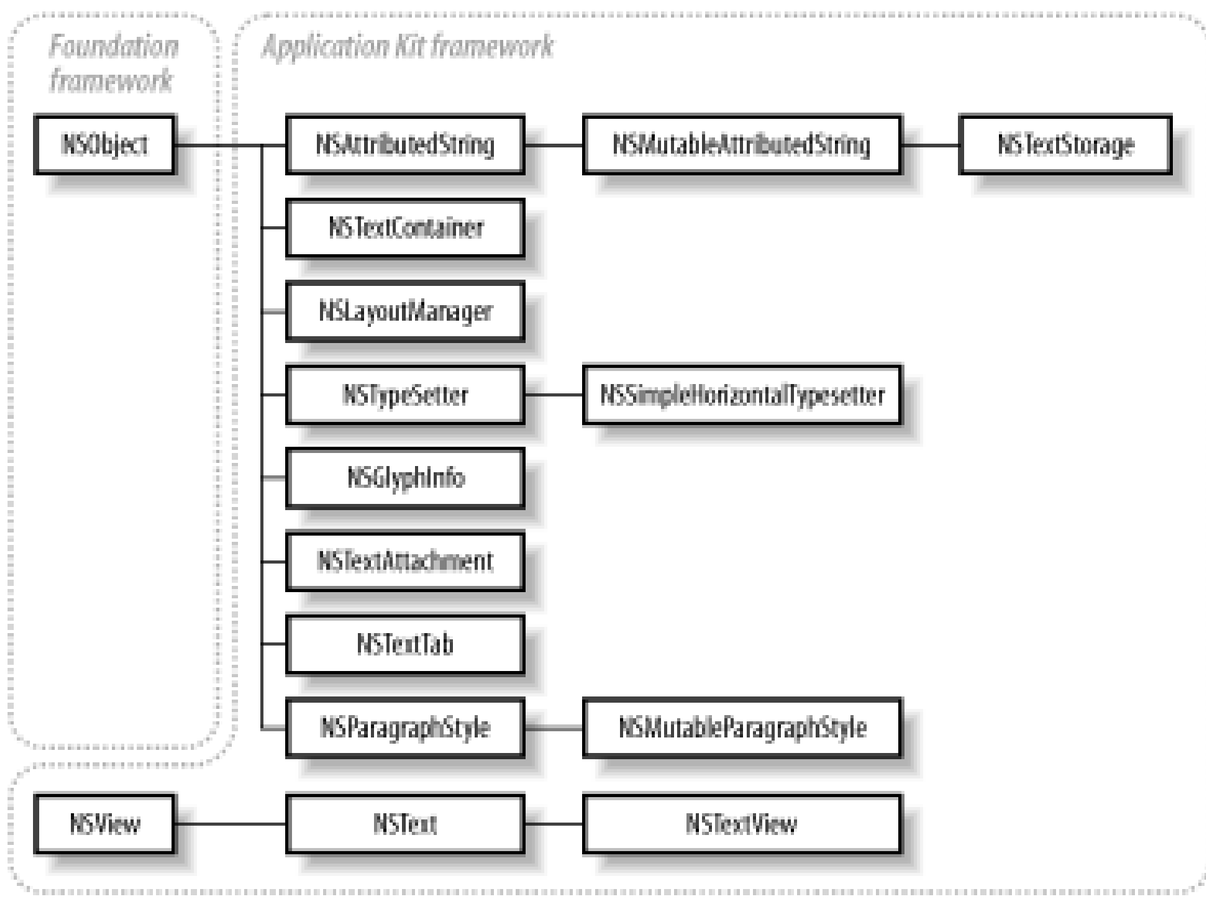




downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 5.1 Text System Architecture

The following four classes make up the core architecture of Cocoa'stext handling system:

- `NSTextStorage` is the backbone data model responsible for storing text.
- `NSTextView` is responsible for presentation in the view.
- `NSLayoutManager` and `NSTextContainer` act as controllers between the model and the view.

The relationship between these core classes is based on the same*Model-View-Controller* (MVC) pattern used throughout the Application Kit (and discussed inChapter 3). Figure 5-2 shows the division of responsibilities in these four classes using the MVC pattern.

Figure 5-2. How the four core text system classes relate to one another in the MVC pattern

Figure 5-2 shows the relationship between the four classes, but doesn't show the one-to-many relationship that may exist between instances of these classes. Instances of`NSTextStorage` own and manage one or more `NSLayoutManager` objects. Similarly, each instance of `NSLayoutManager` owns one or more `NSTextContainer` objects, while each text container object is paired with an `NSTextView` object. The nature of these relationships is what gives Cocoa's text handling system much of its flexibility and power.

## 5.1.1 NSTextView

`NSTextView` represents the view, or presentation, layer of the text system; it is the class that facilitates user interaction with the text system. User interaction consists of displaying text onscreen and allowing the user to manipulate what is seen in the text view.`NSTextView` is a subclass of `NSText`, which inherits from `NSView`, which means that text rendering is handled by Quartz. `NSTextView` provides support for more advanced interactivity features such as drag and drop, rulers, spell checking, cut-and-paste, and speech. It is not only the frontend to the text system, but it is an interface between the text system and almost every relevant Mac OS X technology.

You can create instances of `NSTextView` within Interface Builder or by using one of two methods:

`initWithFrame:`

This method creates the entire network of objects, including the text storage object, layout manager, and text container. When you create a text view within Interface Builder, the entire

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

collection of text system objects is set up in this way.

`initWithFrame:textContainer:`

This method sets the text-view frame and associates the text view with the specified text container. This method is the designated initializer for `NSTextView`.

## 5.1.2 NSTextStorage

`NSTextStorage` makes up the data storage layer for the text system. `NSTextStorage`'s data is stored as a sequence of Unicode characters, which makes the text system capable of localizing an application in any language. Unicode also contains character sets for mathematics and other technica fields. To see the huge number of characters that Unicode can represent,[1] launch Mac OS X's Character Palette from the Input menu, as shown in Figure 5-3.

[1] You can find out more information about Unicode, including the characters that can be represented, at http://www.unicode.org.

Figure 5-3. A tiny selection of Unicode characters in the Character Palette

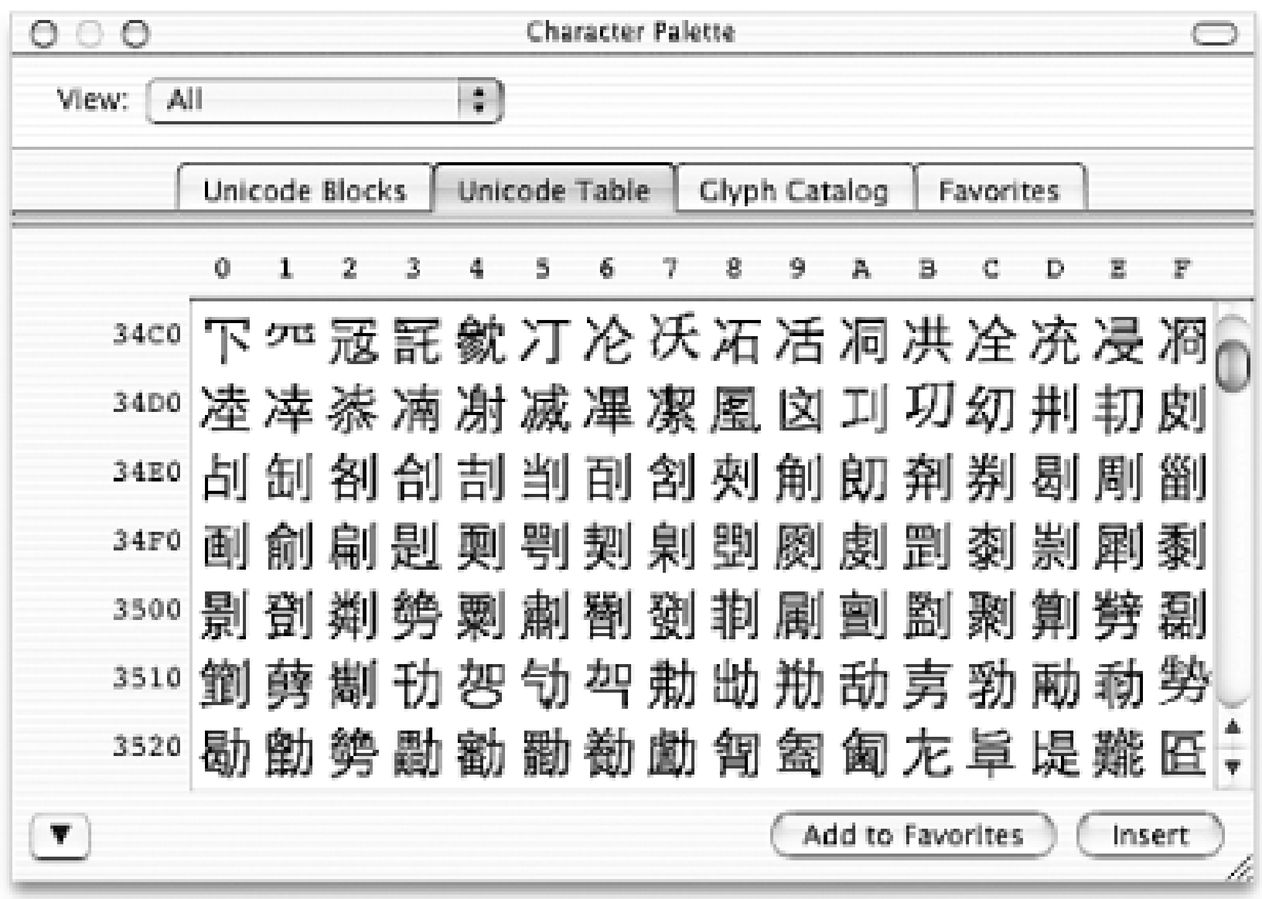


`NSTextStorage` is a subclass of `NSMutableAttributedString`. Every character in the text storage, therefore, is associated with a set of attributes that define appearance characteristics such as font and color (a single attributes dictionary will probably be applicable to a range of characters, but it might have a different set of attributes for each character). Cocoa defines a standard set of attributes, which were enumerated in Table 4-2. Additionally, developers may choose to assign their own application specific attributes to text, which could support features such as syntax coloring.

As mentioned earlier, `NSTextView` contains action methods that let controls change the appearance and layout of a selected region of text. These action methods let controls in the user interface (such as a bold-italic-underline button group, or the font and color panels) interact with the contents of the text view. However, using `NSTextView`'s API to effect these attribute changes programmatically is inefficient since those methods are intended for use as user interface actions; it is preferable to use the API provided by `NSMutableAttributedString`. For example, the method `setAttributes:range:`

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

takes a dictionary with attribute key-value pairs and a range to which these attributes should be applied. Chapter 2 discusses attributed strings in more detail.

### 5.1.3 NSLayoutManager

The job of `NSLayoutManager` is to accurately map characters and glyphs and lay out the resulting glyphs in text containers managed by the layout manager. Figure 5-4 shows a ligature for "Th" in the font Snell Roundhand and illustrates the mapping of characters into glyphs.

Figure 5-4. Mapping Unicode character codes into glyphs

The distinction between characters and glyphs is important, as it represents the intersection between the text-system's data and view layers. Glyphs, unlike Unicode character codes, can take on many forms, the visual appearance of which depends on the attributes of a particular character such as its font, the other characters around that character, and how ligatures are handled in the font being rendered. For example, the glyph for the letter "T" in the Times font is quite different for the glyph the Zapfino font defines for the same letter. Moreover, multiple characters in a sequence may actually define a single glyph. This is especially true in nonwestern alphabets and in fonts that define ligatures for certain pairs of letters.

> You can find an extreme case of a multi-character glyph in the Zapfino font. Open a TextEdit window, change the active font to Zapfino, and then type the font's name. You'll see multiple glyph substitutions as you type the word, culminating in the use of a single glyph for the entire word-Zapfino's signature.

The flow of information with `NSLayoutManager` goes in two directions. You just read about the flow from the data model to the view; however, experience shows that information must flow from the view to the data layer whenever you alter the content by typing, making selections, or changing formatting. To facilitate this, `NSLayoutManager` must be able reconcile the position of selections and the cursor in the glyph stream with character ranges in the storage layer.

The `NSLayoutManager` class has nearly 100 instance methods. Most of these methods are responsible for mapping characters to glyphs, setting attributes of glyphs, and controlling how they are laid out in the view. The API discussed here are the methods that control the text containers that define where text is laid out.

### 5.1.4 NSTextContainer

`NSTextContainer` defines regions for text display. `NSTextContainer`'s default implementation

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

defines rectangular text regions. However, developers may subclass `NSTextContainer` to provide an implementation that supports irregular layouts. For example, you could subclass `NSTextContainer` to support text layout on circular pages instead of rectangular-strange, but true.

Layout managers store text containers in an indexed array-the order of the text containers in the array is significant, as it determines the order in which the layout manager fills the containers with text. When the first container is filled with text, the layout manager moves to the next, and continues with the remaining containers.

## 5.1.5 How Text Is Laid Out

When laying out text, `NSLayoutManager` first converts a run of characters into a mapped sequence of glyphs. Once the layout manager knows exactly what needs to be laid out within a text container, it can check with the text container object for guidance in this layout. To do this, `NSLayoutManager` determines the bounding rectangle of the line of glyphs and passes it to the current text container as a proposed layout rectangle. The text container looks at this *proposed rectangle* and compares it to its own *bounding rectangle*. For example, if the proposed rectangle is too long, the text container returns the largest available rectangle for the current line in the text container to the layout manager. Additionally, the text container returns a *remainder rectangle*, which is the difference between the proposed rectangle and the accepted rectangle. `NSLayoutManager` repeats the proposal process with the remainder rectangle, and each successive remainder rectangle until the layout is complete.

When determining how to modify the proposed rectangle, `NSTextContainer` takes into account the direction in which the glyphs are sequenced in a line, and the direction lines are placed relative to their preceding lines. These directions are referred to as the *line sweep direction* and *line movement direction*, respectively. When a text container modifies the proposed rectangle, the text container can shorten the rectangle from the direction of the line sweep, and it is allowed to shift the rectangle in the direction of the line movement. By adhering to these rules, `NSTextContainer` and `NSLayoutManager` can break up a continuous line of glyphs into an arranged set of lines that can be rendered in a view. There is a clear division of responsibility here:

- `NSLayoutManager` is responsible for mapping the characters to glyphs with all the attributes applied.
- `NSTextContainer` is used by the layout manager to break up the glyph line into a series of lines that fit snugly into the region represented by the text container.

The method in `NSTextContainer` that performs these functions is:

```
lineFragmentRectForProposedRect:sweepDirection:
              movementDirection:remainingRect:
```

The `sweepDirection:` argument is of type `NSLineSweepDirection`, and the `movementDirection:` argument is of type `NSLineMovementDirection`. `NSTextContainer` returns the remainder rectangle to the sender through the `remainingRect:` argument, which is a pointer to an `NSRect` structure. Subclasses override this method to perform custom layout. If the text container object determines that the proposed rectangle cannot fit into the container, then the constant `NSZeroRect` is returned.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 5.2 Assembling the Text System

For many applications that work with text, using `NSTextView` as the frontend interface to the text provides a great deal of functionality. This is by far the easiest way of working with the text system: you only need to drop a text view into your interface using Interface Builder, and you're ready to go.

Using `NSTextView`'s APIs as the sole means of working with the text system does not offer the flexibility that can be achieved by assembling the individual components manually. By starting with an `NSTextStorage` object and adding layout managers, text containers, and text views, document layouts can have multiple columns and pages, have irregular areas of text, or present the same text in two different layouts.

Before exploring the manually assembly of text components, consider these rules that tell you what you can and cannot do:

- A text storage object may have one or more layout manager objects that it manages.
- Each layout manager instance may manage one or more instances of `NSTextContainer`.
- Each text container has exactly one text view associated with it.

By varying the structure of the network with respect to the first two rules, you can create the possibilities mentioned earlier.

Several methods in `NSTextStorage`, `NSLayoutManager`, and `NSTextContainer` facilitate assembly and management of the object network.

`NSTextStorage`

This class offers the following methods for managing its layout managers:

`addLayoutManager:`

Adds the specified layout manager to the list of layout managers owned by the text storage object

`removeLayoutManager:`

Removes the specified layout manager from the collection of layout managers owned by the text storage object

`layoutManagers`

Returns an `NSArray` of layout managers currently managed by the text storage object

`NSLayoutManager`

This class defines the following four methods for managing its collection of `NSTextContainers`:

`addTextContainer:`

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Adds the specified text container to the end of the list of text containers managed by the layout manager

`insertTextContainer:atIndex:`

Inserts a text container at the indicated array index into the layout manager's text container array

`removeTextContainerAtIndex:`

Removes the text container found at the specified index from the layout manager

`textContainers`

Returns an array of text containers managed by the layout manager

The nature of these methods is differs from those declared by `NSTextStorage` for managing layout managers. The order of text containers in a layout manager defines the order in which text containers will be filled with text: containers at lower indices will be filled before those at higher indices.

Finally, `NSTextContainer` associates itself with its partner text view object by using `setTextView:`. Later, the text view is retrieved with the `textView` method.

## 5.2.1 Layout Scenarios

Having control over the layout managers and text containers allows a great deal of flexibility over how a body of text appears onscreen or in print. The possibilities increase when you introduce subclasses of `NSTextContainer` to the system for defining irregular, or nonrectangular layout regions.

### 5.2.1.1 Simple layout

The simplest layout consists of a single view that displays a continuous body of text. This is the layou favored by applications that deal with plain text, such as source code or HTML, as they have little interest in how the text might appear on the printed page. Figure 5-5 shows the object configuration that establishes this "normal" view.

Figure 5-5. Configuration of the core classes for displaying a body of continuous text

Figure 5-5 shows one instance of each of the four core text classes: one text storage object that manages a single layout manager, which in turn manages one text container/text view object pair. The text view exists as a subview of an `NSScrollView`, which allows the user to scroll through the contents of a larger document that cannot be displayed in one screen. You can build this simply by adding a text view to the application in Interface Builder or by using `NSTextView`'s `initWithFrame:`.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### 5.2.1.2 Paginating text

A more complex text layout, shown in Figure 5-6, is the so-called "page-view," in which the text is displayed onscreen as a series of pages.

Figure 5-6. A more complex configuration that presents text in a "page-view"

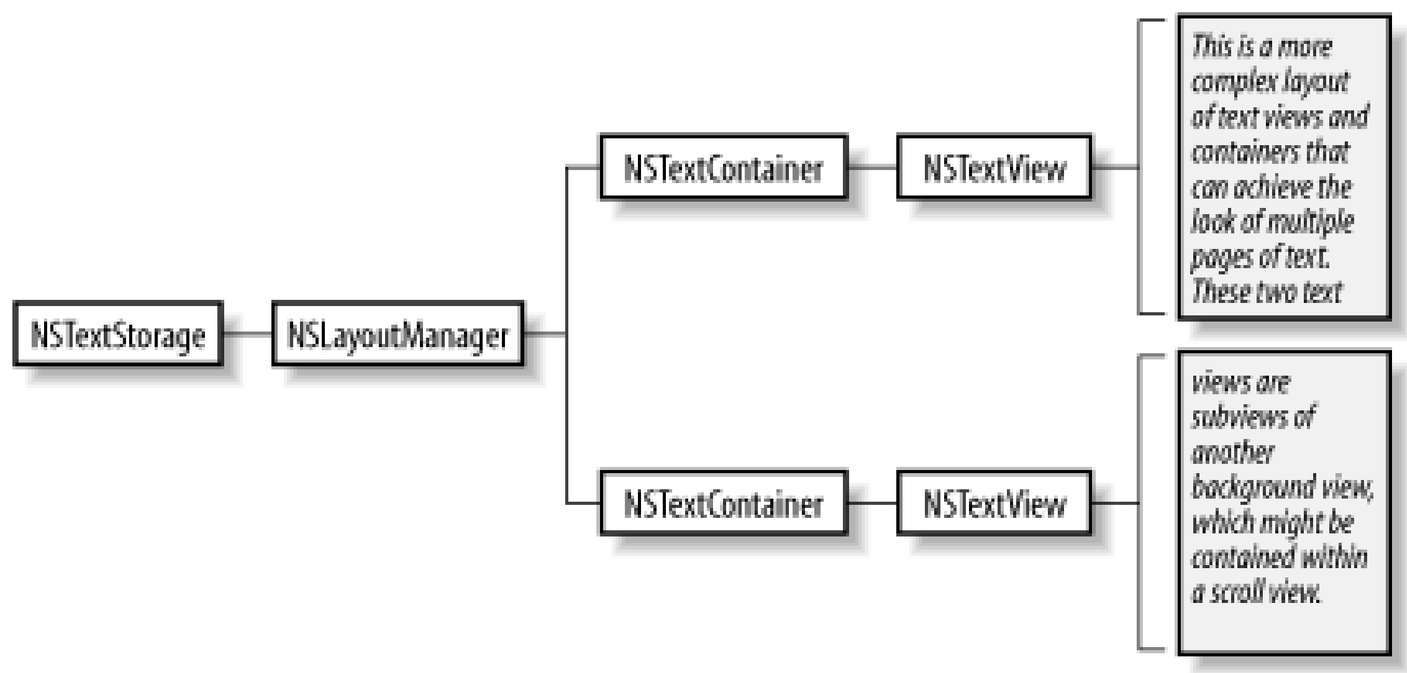


This layout is common in word processors, such as Microsoft Word or TextEdit, where text layout on multiple pages is important. This layout is implemented with a pair of `NSTextContainer` and `NSTextView` objects for each page of the document. The layout manager determines the order in which to fill each page according to the order of `NSTextContainer`s in the layout manager's array of text containers. The mechanism `NSLayoutManager` uses to notify a delegate that the current text container is filled can be a cue to create a new text container/text view pair and accommodate more text. From the user's perspective, this mechanism allows pages to be added to the document and displayed on screen dynamically.

### 5.2.1.3 Multicolumn text

The pattern introduced in Figure 5-6 can apply to the situation in Figure 5-7: a multicolumn, multipage document. In this configuration, a pair of `NSTextContainer` and `NSTextView` objects represents each column. The order in which columns and pages are filled depends on the order of `NSTextContainer` objects in the `NSLayoutManager` instance.

Figure 5-7. Objects involved in creating a multicolumn, multipage document

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

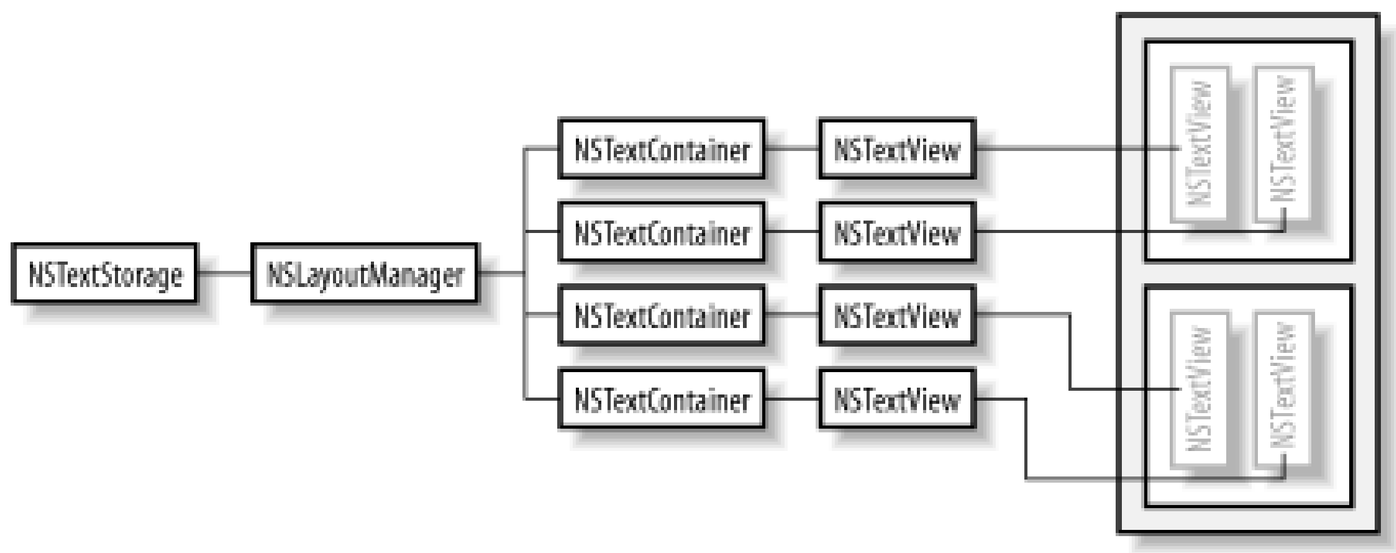


This gives the illusion of four pages of text, which you might see in a Print Preview window. To create the appearance of a true multicolumn, multipage document (as in Figure 5-7), the column text views are grouped within a regular `NSView` which represents a page. That page (`NSView`) may be the same color of the column (the `NSTextView`s), which means that you only see the text on a solid background. Again, the collection of views that represent a single page is arranged on a gray background view that is a child view of a scroll view.

### 5.2.1.4 Multiple simultaneous layouts

As mentioned earlier, `NSTextStorage` objects are not limited to just one layout manager; they can have many layout managers, if necessary. This scenario lets you lay out the same body of text in multiple styles specified by each layout manager. Figure 5-8 illustrates how multiple layout managers can present text in two layouts simultaneously.

Figure 5-8. Using multiple layout managers to display text data in differer layouts

The flexibility achieved through cleverly arranging `NSTextView`s within `NSView`s can create many effects, resulting in endless possibilities, as shown in Figure 5-9.

Figure 5-9. You can create complex networks of objects

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

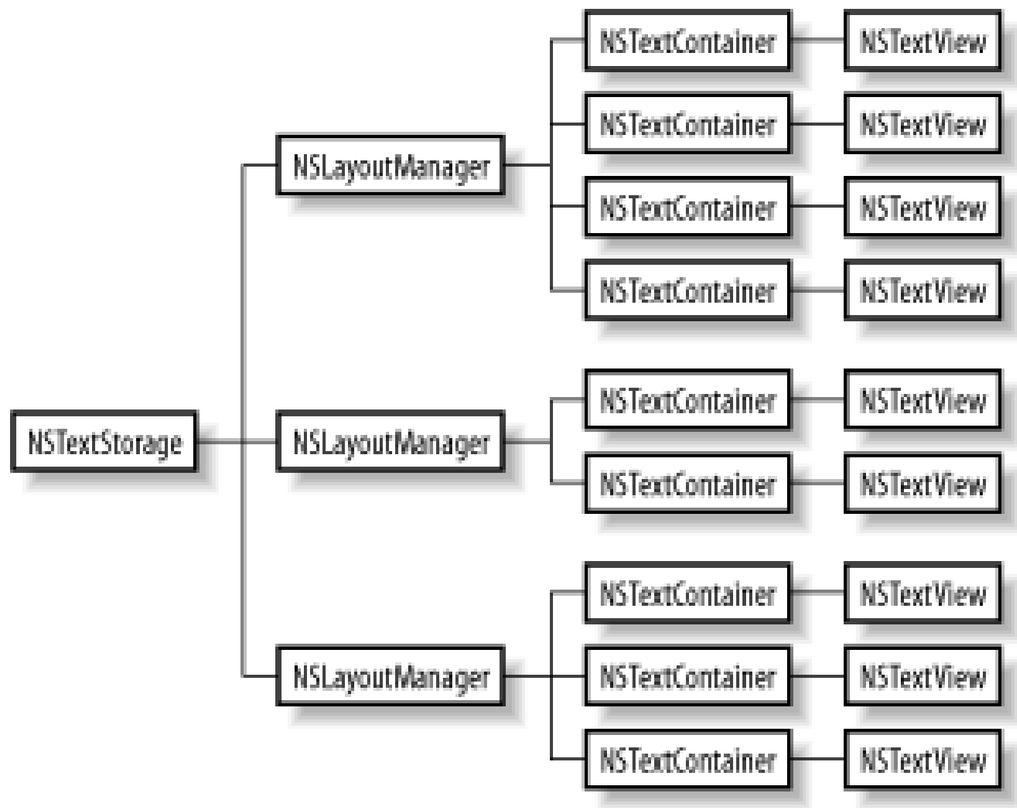


## 5.2.2 NSLayoutManager Delegation

`NSLayoutManager` employs a delegate object that may respond to two methods:

- `layoutManager:didCompleteLayoutForTextContainer:atEnd:`
- `layoutManagerDidInvalidateLayout:`

The first method notifies the delegate when the layout manager finishes formatting the text in the specified text container object. This method can be used to control the appearance of progress indicators in the user interface, or it can enable or disable buttons that control text layout. `NSLayoutManager` passes `nil` as the text container argument when it has no more room to lay out its text in the existing text container. This information can be used tohelp you create a new text container/text view pair, which is added to the `NSLayoutManager`'s list of managed text containers.

Example 5-1 demonstrates how to implement `layoutManager:didCompleteLayoutForTextContainer:atEnd:`. The code in Example 5-1 creates the layout situation shown in Figure 5-6. When a text container fills up with text, the delegate responds by using this method to create additional layout space.

### Example 5-1. Creating text containers dynamically

```
- (void)layoutManager:(NSLayoutManager *)lm
        didCompleteLayoutForTextContainer:(NSTextContainer *)tc
        atEnd:(BOOL)flag
{
  if ( !tc ) {
    NSSize tcSize = NSMakeSize( 300, 500 );
    NSTextContainer *cont = [[NSTextContainer alloc]
                                initWithContainerSize: tcSize];
    [[[textStorage layoutManagers]
                            lastObject] addTextContainer: cont];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSTextView *tv = [[NSTextView alloc]
                      initWithFrame:[self frameForNewTextView];
                      textContainer:cont];
    [canvas addSubview:tv];
  }
}
```

The delegate method in Example 5-1 is invoked every time the current text container fills up. However, your implementation will work only when the text container passed to you in the argument list is `nil`, which indicates that the layout manager has filled its current text container. This method deals with a filled text container by creating a new one and adding it to the list of text containers managed by the layout manager. This is accomplished with the `NSTextContainer` initializer, `initWithContainerSize:`.

The `textStorage` variable is an instance variable of the class in which this method is implemented. This instance variable is assigned to the text storage object for the application. To add the new text container, `cont`, to the list of text containers managed by the layout manager, obtain the layout manager with the `layoutManagers` method. Since this method returns an `NSArray` of layout managers, even if there is just one, a `lastObject` method is sent to get an instance of `NSLayoutManager`, which receives an `addTextContainer:` message with `cont` as the argument.

To create a text view to pair with the text container, use the designate initializer of `NSTextView`. This initializer requires a frame for the text view, as well as the text container it needs to associate with the text view. Example 5-1 relies on another hypothetical method, `frameForNewTextView`, to return a frame rect that places the new text view below the previous one. The text view is then added as a subview of `canvas`. In this example, `canvas` is best represented by the gray region of Figure 5-7; individual text views are pages displayed in a series on this background view.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 6. Networking

Networking is a critical component of many applications today. Networking APIs can take many forms, including TCP/IP communications with the sockets library or interprocess communications using Cocoa's distributed objects system. Mac OS X's Darwin layer includes all standard Unix networking technologies and APIs, which are fully accessible from any Cocoa application. In addition to being able to access the Unix APIs, the Foundation framework implements several classes that give applications a higher-level interface for working with networking technologies. This chapter summarizes Foundation's networking classes, shown in Figure 6-1.

Figure 6-1. Hierarchy of networking-related classes in the Foundation framework

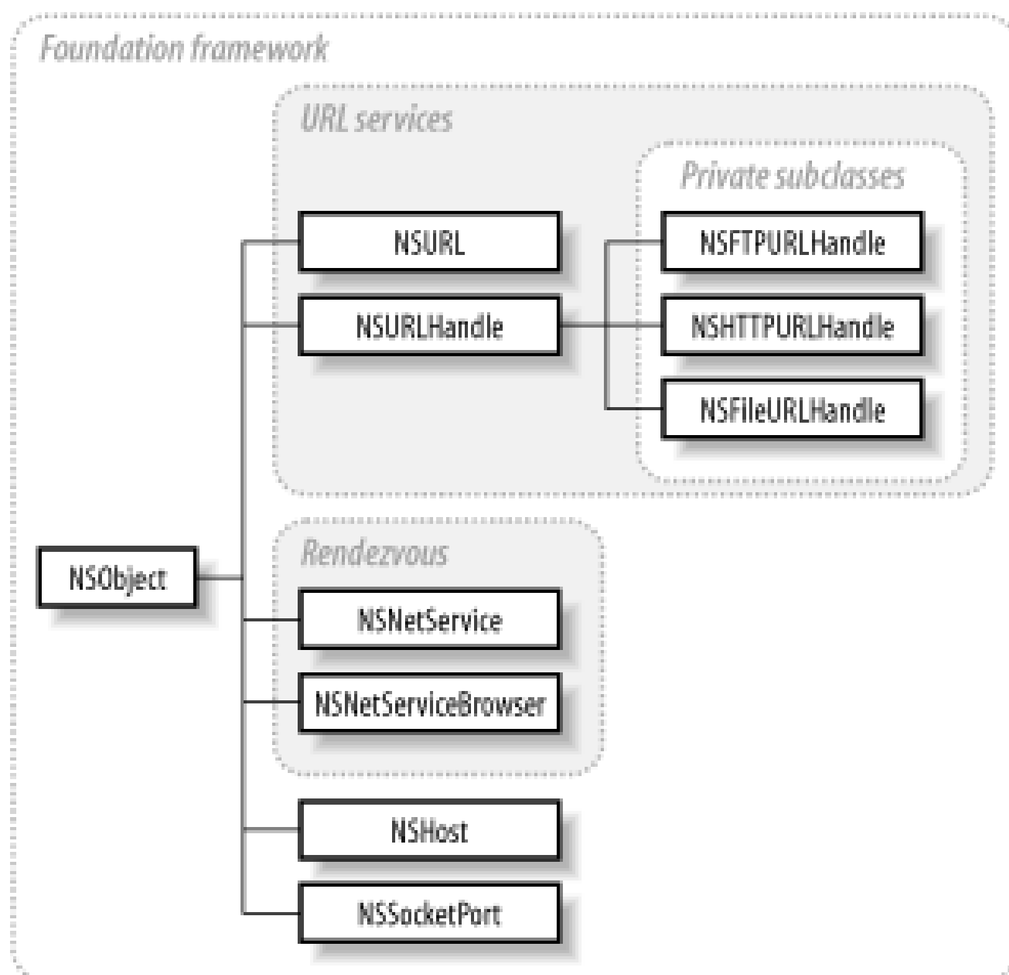




downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 6.1 Hosts

NSHost provides services that find host names from addresses and addresses from host names. NSHost relies on the network services available to the operating system, such as LDAP, NetInfo, or the Domain Name Service (DNS). Example 6-1 shows how to use NSHost.

### Example 6-1. Using NSHost

```
// Get the NSHost object for the current host
NSHost *host = [NSHost currentHost];

// Get the name of a host
NSString *name = [host name];

// Get the address of a host; returns "xxx.xxx.xxx.xxx" string
NSString *addr = [host address];

// Other ways to create a host object
NSHost *host = [NSHost hostWithAddress:@"www.oreilly.com"];
NSHost  *host  =  [NSHost  hostWithName:@"209.204.146.22"];

// If a host has multiple names or address, use the following
NSArray *names = [host names];
NSArray *addrs = [host addresses];
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 6.2 URL Resources

Foundation has two classes that facilitate working with URLs: `NSURL` and `NSURLHandle` . `NSURL` represents a Uniform Resource Locator (URL). This class lets applications create, manipulate, and pick apart URLs. `NSURLHandle` accesses data and resources specified by an instance of `NSURL` . This class can access resources provided by HTTP, FTP,[1] and file services.

[1] FTP support in `NSURLHandle` was added in Mac OS X 10.2 and is not available in earlier versions of Mac OS X.

## 6.2.1 Working with URLs

`NSURL` represents a URL-the human-readable host names and paths that various network clients use to locate resources on the local filesystem or over the Internet. `NSURL` provides a number of methods and initializers that let you create instances in many different ways, as shown in Example 6-2

Core Foundation has a type, `CFURL` , that is "toll-free bridged" to `NSURL` . As such, the two types can be used interchangeably. `CFURL` and `NSURL` are essentially equivalent: `NSURL` objects can be used in Core Foundation calls that ask for a `CFURL` , and vice versa. `NSURL` is just one of several Foundation classes that have a bridged Core Foundation equivalent.

### Example 6-2. Creating and initializing instances of NSURL

```
// From a string...
NSURL *url = [NSURL URLWithString:@"http//www.macdevcenter.com"];
url = [[NSURL alloc]
         initWithString: :@"http//www.macdevcenter.com"];

// From a file path...
url = [NSURL fileURLWithPath:@"/Users/mike/Pictures/pic.tiff"];
url = [[NSURL alloc]
    initFileURLWithPath: :@"/Users/mike/Pictures/pic.tiff"];

// Access a URL with scheme, host, and path
url = [[NSURL alloc] initWithScheme:@" FTP" host:@"localhost"
    path:@"/Some/Path"];
```

In Example 6-2 , the last initializer, `initWithScheme:host:path` :, specifies the scheme used by the host the URL points to. In this case, an FTP address was specified; however, the backend to `NSURL` 's data transfer functionality, `NSURLHandle` , supports HTTP and file URL schemes as well.

`NSURL` includes an assortment of methods that let you pick apart URLs to extract pieces of information from them, such as the URL path, the host name, the base URL, and the query string. Example 6-3 illustrates several `NSURL` methods.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### Example 6-3. NSURL methods

```
NSURL *url = [NSURL URLWithString:@"http//www.google.com/
search?hl=en&ie=ISO-8859-1&q=NSURL&btnG=Google+Search"];

NSString *s;
s = [url host];                    // Returns "www.google.com"
s = [url scheme];                  // Returns "HTTP"
s = [url path];                    // Returns "/search"

//  Returns  "//www.google.com/search?hl=en&ie=ISO-8859-1&q=NSURL&btnG=Google+Search"
s = [url resourceSpecifier];

//  Returns  "hl=en&ie=ISO-8859-1&q=NSURL&btnG=Google+Search"
s = [url query];
```

While `NSURLHandle` implements data transfer functionality, `NSURL` provides a handful of convenience methods that can transfer data without having to instantiate `NSURLHandle` . These methods, whose usage is shown in Example 6-4, include:

- `resourceDataUsingCache` :
- `setResourceData` :
- `loadResourceDataNotifyingClient:usingCache` :

### Example 6-4. Using NSURL data access methods

```
// Create an instance of NSURL from an NSString
NSString *urlStr = @"http//host_address/image.jpg";
NSURL *url = [NSURL URLWithString:urlStr];

// Download data from the resource located by a URL
NSData *data = [url resourceDataUsingCache:NO];
NSImage *img = [[NSImage alloc] initWithData:data];

// Write data to a resource located by a URL
NSData *data = [img TIFFRepresentation];
[url setResourceData:data];
```

If `YES` is passed to the `resourceDataUsingCache` : method, `NSURL` attempts to load the resource from the cache if it was loaded previously. If the resource was not loaded, then the host will load it. Passing `NO` to this method tells `NSURL` to always fetch the data from the host, even if it has done so already.

> Many Cocoa classes that work with files have methods that let clients interact with files through standard file paths or URLs. For example, you could have replaced the middle two lines of code in Example 6-4 with `NSImage` 's initializer `initWithContentsOfURL` :, supplying `url` as the argument.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

## 6.2.2 URL Handles

NSURLHandle provides an interface for uploading and downloading data to and from a resource specified by an instance of NSURL . NSURLHandle actually offloads much of this work to subclasses that implement NSURLHandle 's interface to work with various schemes. NSURLHandle 's subclasses include NSFileURLHandle , NSFTPURLHandle , and NSHTTPURLHandle . These three subclasses are private-all interaction with them is through NSURLHandle 's public interface, which creates the proper subclass based on the provided NSURL object's scheme. For most purposes, the interface provided by NSURL should be sufficient for resource access. NSURLHandle is most useful when you need to create a new subclass to support a URL scheme other than file, FTP, or HTTP.

### 6.2.2.1 Managing subclasses

NSURLHandle 's subclasses are responsible for implementing the resource acquisition mechanics needed by a URL scheme. When created, that subclass needs to be registered with NSURLHandle using the class method registerURLHandleClass :. The registration process makes NSURLHandle aware of a subclass's availability to handle a new URL scheme.

To determine whether NSURLHandle handles a particular URL scheme, use the class method canInitWithURL :. Additionally, you can retrieve the actual class object used by NSURLHandle for a particular URL scheme by invoking the class method URLHandleClassForURL :.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 6.3 Rendezvous Network Services

*Rendezvous* is Apple's implementation of *zero-configuration networking* (Zeroconf). Introduced with the Jaguar release of Mac OS X, Rendezvous brings AppleTalk's ease of use to standard IP networking. This gives the user the ability to browse for printing, file sharing, or any other IP-based services much as was done with the Chooser in earlier versions of the Mac OS.

For more information on Rendezvous networking, see Apple's Rendezvous developer page at http://developer.apple.com/macosx/rendezvous/, or visit the Zeroconf working group web site at http://www.zeroconf.org.

Foundation provides access to Rendezvous' low-level APIs through the classes `NSNetService` and `NSNetServiceBrowser`. An application registers, or *publishes*, a service on the network by using `NSNetService`. The class `NSNetServiceBrowser` searches for and discovers services that are registered elsewhere. This section provides an overview of how these classes fit into an application.

## 6.3.1 NSNetService

`NSNetService` represents a network service that applications either publish or use as a client. A *network service* can be FTP, Telnet, SSH, HTTP, or something of your own design.

The Picture Sharing application included with the Foundation example code found in the Developer Tools installation (*/Developer/Examples/Foundation/PictureSharing*) is an example of a custom Rendezvous service. This example has two applications: a server application that publishes a picture sharing service and a client application that browses for picture sharing services.

To set up `NSNetService`, you must do the following:

1. Configure a listening server socket that clients will connect to.
2. Initialize an `NSNetService` object with the service domain, type, name and port.
3. Assign a delegate object to this instance.
4. Handle any messages received by the delegate.

Before a service can be published, you must first create a network socket to which clients connect to access the service. While the Net Services API (which collectively refers to `NSNetService` and `NSNetServiceBrowser`) has little to do with data transfer between hosts, it has everything to do with advertising a service's existence on a local network. On Mac OS X, several APIs can create a socket: `NSSocketPort` provides an Objective-C API for sockets, CoreFoundation provides the `CFSocket` API, and Darwin has the BSD Sockets API. Since this book focuses on how to accomplish tasks with Cocoa, a discussion of the use of `NSSocketPort` is relevant and will be discussed later, while the Unix and CoreFoundation APIs are beyond the scope of this book.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### 6.3.1.1 Initializing NSNetService for publication

`NSNetService` has two initializers:

- `initWithDomain:type:name:port:`
- `initWithDomain:`

`NSNetService`'s *publication-appropriate* initializer is `initWithDomain:type:name:port:`. The first argument to this method is the domain in which the service is registered. As of Mac OS X 10.2, only the local registration domain, *.local.*, is supported. Since the Zeroconf working group is still hammering out the details of zero-configuration networking, the local domain may not always be *.local*. As such, passing an empty string to `initWithDomain:` is preferable to passing *.local.* as the domain. Doing so tells `NSNetService` to register the services under the default domain.

The `type:` argument specifies the service type and transport protocol. This string takes the form *_servicetype._tcp.*, where *_servicetype* can be any standard service such as HTTP, FTP, or Telnet, or it may be an arbitrary service type specific to your application, such as *_myservice*.

> The *Internet Assigned Numbers Authority* maintains a catalog of service names and a list of ports where applications can find these services. You can find this catalog at http://www.iana.org/assignments/port-numbers. The */etc/services* file contains a similar catalog of service names and port numbers.

The third argument, `name:`, is the human-readable name for the service displayed in service browser lists. It can be any UTF8 string you like. Finally, `port:` is the port number to which the service socket is bound. To publish a service, invoke `NSNetService`'s `publish` method. To remove a service from the network, send a `stop` message to the service instance. Example 6-5 shows how an application can create and publish a service.

#### Example 6-5. Creating and publishing a network service

```
// Socket used for listening for incoming connections bound to port 631
NSSocketPort *s = [[NSSocketPort alloc] initWithTCPPort:631];

NSNetService *serv = [[NSNetService alloc] initWithDomain:@""
                   type:@"_ipp._tcp"
                   name:@"R&D Printer"
                   port:631];

[serv setDelegate:delegateObject];
[serv publish];

// Remove the service from the network
[serv stop];
```

`NSNetService` tells interested parties that the designated host has a socket listening for connections on the specified port. `NSNetService` multicasts the address and port information for an open socket

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

to the network. The response message from the Rendezvous host contains additional information that identifies the service name and type. Whether or not a socket is listening on that port is another question; NSNetService puts us on the honor system to make sure everything is configured properly.

The Net Services API uses delegation to drive an application's user interface and for error handling. Setting the delegate of an instance of NSNetService or NSNetServiceBrowser is essential for using these classes effectively.

### 6.3.1.2 NSNetService delegate methods

NSNetService declares that the delegates should implement the following methods:

netServiceWillPublish:

Notifies the delegate that the service is about to be published. The NSNetService that invoked this method is passed in the argument.

netService:didNotPublish:

Notifies the delegate of an error that occurred while attempting to publish the service. The netService: argument is the NSNetService object that produced the error, and the didNotPublish: argument is an error dictionary containing information about the error. The dictionary contains objects for the keys NSNetServiceErrorCode and NSNetServiceErrorDomain.

netServiceWillResolve:

Invoked in the delegate when the network is ready to resolve the service. This method is invoked only after sending a resolve message to the service object. The argument is the NSNetService that received the resolve message.

netService:didResolve:

Notifies the delegate that the service was successfully resolved and is now ready to use. At this point, the address used to connect to the service has been verified and is ready to use.

netService:didNotResolve:

If an error occurs while attempting to resolve a service, the delegate is notified via this method. The netService: argument is the service instance that produced the error, and the didNotResolve: argument contains the error dictionary. The dictionary keys NSNetServiceErrorCode and NSNetServiceErrorDomain provide information about the error.

netServiceDidStop:

This method is invoked in the delegate when invoking the stop method in an NSNetService that previously received a publish or resolve message.

Instances of NSNetService either publish or resolve a service, and thus far this chapter has only shown how to publish a service. Services meant for publication can't be used for resolution, and thos meant for resolution can't be used for publication.

The delegate methods of NSNetService reflect this division. The three methods netServiceWillResolve:, netService:didResolve:, and netService:didNotResolve: notify the delegate of the status of a service resolution request (in response to a resolve message). The remaining methods, netServiceWillPublish:, netService: didNotPublish:, and

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

netServiceDidStop:, notify the delegate of a publish operation's status. Services meant for publication do not invoke resolution-specific delegate methods, and those services meant for resolution won't ever invoke publication-specific delegate methods.

Implementing these delegate methods is not necessary for a functioning instance of NSNetService. Net services can be published and resolved without having been assigned a delegate; however, without a delegate, there is no way of knowing a particular net service object's status.

### 6.3.1.3 Errors

NSNetService declares the delegate methods netService:didNotPublish: and netService:didNotResolve:. These methods notify the delegate of an error that may have occurred in a publish or resolve operation. Each method passes the net service object invoking the methods in the first argument, and a dictionary describing the nature of the error in the second argument.

The error dictionary contains two keys: NSNetServicesErrorDomain and NSNetServicesErrorCode. The first key is for an object that shows where the error occurred: in the lower-level networking layer or in the NSNetService implementation. The NSNetServicesErrorCode key reflects the nature of the error by returning an NSNumber, which corresponds to one of the constants described in Table 6-1.

Table 6-1. Net services error codes

| Error code | Description |
|---|---|
| NSNetServicesUnknownError | An unknown error occurred. |
| NSNetServicesCollisionError | This error results when a service tries to register a service under a name that is already taken. |
| NSNetServicesNotFoundError | The service (attempting to be resolved) could not be found on the network. |
| NSNetServicesActivityInProgress | The net service is busy and cannot process the request. |
| NSNetServicesBadArgumentError | An invalid argument was used when initializing the NSNetService instance. |
| NSNetServicesCancelledError | The client cancelled the action. |
| NSNetServicesInvalidError | The net service was configured improperly. |

## 6.3.2 NSNetServiceBrowser

The NSNetServiceBrowser class is an implementation of Rendezvous' service discovery protocol. This class depends heavily on a delegate, which is the only means of alerting an application to the discovery of a service. NSNetServiceBrowser searches for domains as well as services and uses the same mechanisms in the delegate object to report discovered domains. The methods that a delegate of NSNetServiceBrowser may implement are as follows:

netServiceBrowser:didFindDomain:moreComing:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Notifies the delegate that a domain was discovered.

`netServiceBrowser:didRemoveDomain:moreComing:`

Notifies the delegate when a previously discovered domain becomes unavailable.

`netServiceBrowser:didFindService:moreComing:`

Notifies the delegate that a service was discovered.

`netServiceBrowser:didRemoveService:moreComing:`

Notifies the delegate objects that a previously discovered service was removed from the network while searching.

`netServiceBrowser:didNotSearch:`

If an error occurs, this method notifies the delegate. The first argument is the service browser instance reporting the error, and the second argument is the error dictionary that contains information about the nature of the error.

`netServiceBrowserWillSearch:`

Notifies the delegate that the network is ready and the search is about to commence. The method is passed the service browser instance that is about to begin searching.

`netServiceBrowserDidStopSearch:`

Notifies the delegate that a search ended as a result of a `stop` message to the service browser object. It can perform housekeeping tasks when the search completes.

Several of the delegate methods for `NSNetServiceBrowser` listed here include the `moreComing:` argument. This argument contains a `BOOL` value indicating whether or not more services are to be reported (`NSNetServiceBrowser` may discover services faster than they can be reported). The utility of this flag has to do with how the information is reported through the user interface. The idea is that the user interface should be updated with all available information in one fell swoop. Rather than adding a service name to the browser list every time one is discovered, the delegate method should update the interface only if `moreComing:` reports back with `NO`, saying that there are no further services to report at the time.

### 6.3.2.1 Searching for domains

`NSNetServiceBrowser` searches for domains and for services. The previous section discussed the service discovery aspect of `NSNetServiceBrowser`. When searching for domains, you can look for either all domains using the `searchForAllDomains` method or only for those for which you have registration authority with the `searchForRegistrationDomains` method. Example 6-6 shows how to set up a class to search for domains using these methods.

#### Example 6-6. Searching for domains using NSNetServiceBrowser

```
// Assume the following instance method exists and has been initialized.
NSMutableArray *domains;

- (void)beginDomainSearch
{
  // Assume browser is an instance variable
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
  browser = [[NSNetServiceBrowser alloc] init];
  [browser searchForAllDomains];

  // Or use [browser searchForRegistrationDomains];
}

- (void)netServiceBrowser:(NSNetServiceBrowser *)browser
      didFindDomain:(NSString *)domainString
         moreComing:(BOOL)moreComing
{
  [domains addObject:domainString];

  if ( moreComing == NO )
    [self updateUI];
}

- (void)netServiceBrowser:(NSNetServiceBrowser *) browser
     didRemoveDomain:(NSString *)domainString
          moreComing:(BOOL)moreComing
{
  [domains removeObject:domainString];

  if ( moreComing == NO )
    [self updateUI];
}
```

In Example 6-6, note the "Or" comment in the method `beginDomainSearch`. The comment appears to be relatively innocuous, but it brings up an important point about the capabilities of `NSNetServiceBrowser`. `NSNetServiceBrowser` may perform only one search at a time, and this holds true for domain and service searches. If you want to perform multiple searches, either wait for a search to stop and restart your desired search or create multiple instances of `NSNetServiceBrowser`.

Once the list of domains is obtained, use these strings to specify the domain you would like to search in for services. You also have the option of passing an empty string to indicate that you would like to search in the default domain, as was true when initializing an instance of `NSNetService`.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 6.4 Sockets

It is possible to interact with Darwin's BSD sockets API in all of Mac OS X's C-based application environments, including Cocoa. This API is declared primarily in the headers *sys/socket.h* and *netinet/in.h*, and is discussed at length in *Unix Network Programming*, by W. Richard Stevens (Prentice Hall, 1998). Core Foundation also provides an API to sockets with `CFSocket`. However, discussion of `CFSocket` is beyond the scope this book. Instead, the next section provides shows how to interact with sockets using the Foundation class `NSSocketPort`.

In earlier versions of Mac OS X (prior to Mac OS X 10.2), `NSSocketPort` was used exclusively as part of Cocoa's distributed objects architecture. `NSSocketPort` created sockets-based distributed objects connections across a network. However, now `NSSocketPort` provides a convenient alternative to the C sockets API for raw messaging.

`NSSocketPort` makes it possible to create sockets configured either as local listening sockets (*server sockets*) or sockets connected to a remote host (*client sockets*). The simplest way to initialize a listening socket port object is using the method `initWithTCPPort:`. This method takes a port number as an argument and returns an `NSSocketPort` object representing a TCP/IP streaming socket. If 0 is passed as the port number, then the operating system selects a port to bind to the socket.

Initialize an `NSSocketPort` to connect to a remote socket with the method `initWithRemoteTCPPort:host:`. This method takes as arguments the port number you connect to on the host specified in the second argument. A connection to the remote host is not actually established until data is sent. The *hostname* may be either a domain-name-like hostname, such as `www.oreilly.com`, or an IPv4-style address, such as `208.201.239.36`.

Several of `NSSocketPort`'s methods provide information about the socket, including:

`address`

This method returns an `NSData` object that contains the socket's `sockaddr` structure, which provides information about the sockets address.

`protocol`

This method returns an `int` specifying the protocol used by the receiver, and `protocolFamily` returns an `int` specifying the protocol family used by the receiver.

`socketType`

This method returns an `int` that identifies the receiver's socket type.

The values returned by these methods are the same as the values of the constants used in the BSD sockets API. If you're familiar with socket programming on a Unix system, you should feel right at home with `NSSocketPort`.

The `socket` method returns a native OS socket file descriptor, which can then be used with the standard C functions `read` and `write`, or to initialize an `NSFileHandle`. Example 6-7 demonstrates how to use `NSSocketPort` to create sockets.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Example 6-7. Making sockets with NSSocketPort

```
// Local TCP/IP socket of type SOCK_STREAM listening on port 52279
NSSocketPort *sock= [[NSSocketPort alloc] initWithTCPPort:52279];

// Socket to connect to remote host
sock = [[NSSocketPort alloc]
           initRemoteWithTCPPort:52279 host:@"10.0.1.3"];
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 6.5 NSFileHandle

NSFileHandle provides methods that let you read and write data from a file or communication channel asynchronously in the background. Chapter 2 discussed file access with NSFileHandle. This section describes NSFileHandle's asynchronous communications features and how they apply to networking.

You can obtain a socket file descriptor from an instance ofNSSocketPort by sending a socket message to the socket port object. With the socket descriptor, you are able to initialize an instance o NSFileHandle with the method initWithFileDescriptor:. The initWithFileDescriptor:closeOnDealloc: method is an extension of this method that specifies whether or not the file descriptor will close when the file handle object is deallocated. By default, the file handle object does not close the file descriptor and ownership of that descriptor remains with the object that created the file handle. To determine anNSFileHandle instance's file descriptor, invoke the method fileDescriptor.

NSFileHandle provides the following three methods for performing asynchronous background communication:

acceptConnectionInBackgroundAndNotify

This method is valid only for NSFileHandle instances initialized with a socket file descriptor (of type SOCK_STREAM), and causes the socket represented by the file handle to listen for new connections. This method returns immediately while a background thread accepts client connections over the socket. Observers are notified of new connections by registering for the notification NSFileHandleAcceptedConnectionNotification. The notification's userInfo dictionary contains a new socket file handle connected to the client that initiated the connection, which frees the listening socket to accept additional connections. You can obtain the socket from the userInfo dictionary through the key NSFileHandleNotificationFileHandleItem.

readInBackgroundAndNotify

This method begins an asynchronous read operation on a socket in the background by invoking the method availableData. This method is generally invoked in the file handle object that represents the socket connected to the client that is obtained from the NSFileHandleAcceptedConnectionNotification userInfo dictionary. When data is read, the connected socket file handle posts an NSFileHandleReadCompletionNotification, whose userInfo dictionary contains the data that was read. You can obtain this NSData object by using the NSFileHandleNotificationDataItem key.

readToEndOfFileInBackgroundAndNotify

This method behaves similarly to readInBackgroundAndNotify, except the NSFileHandle method readToEndOfFile is invoked. When all data has finished being read, the file handle posts an NSFileHandleReadToEndOfFileCompletionNotification notification. You can obtain the read data from the userInfo dictionary by using the NSFileHandleNotificationDataItem key.

NSFileHandle declares three additional methods that include aForModes: argument:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

- `acceptConnectionInBackgroundAndNotifyForModes:`
- `readInBackgroundAndNotifyForModes:`
- `readToEndOfFileInBackgroundAndNotifyForModes:`

The `ForModes:` argument specifies which run loop modes each method's notification may be posted in. This specification provides finer control over operation of the notification process.

Example 6-8 shows how to use `NSFileHandle` to implement a simple server infrastructure.

### Example 6-8. Using NSFileHandle for server socket communication

```
- (void)startServer
{
  NSSocketPort *sockPort;
  sockPort = [[NSSocketPort alloc] initWithTCPPort:12345];
  int socketFD = [sockPort socket];

  NSFileHandle *listeningSocket;
listeningSocket = [[NSFileHandle alloc]
              initWithFileDescriptor:socketFD];

  NSNotificationCenter *nc;
  nc = [NSNotificationCenter defaultNotificationCenter];
  [nc addObserver:self
        selector:@selector(spawnChildConnection:)
            name:NSFileHandleConnectionAcceptedNotification
          object:listeningSocket];

  [listeningSocket acceptConnectionInBackgroundAndNotify];
}

  /*
   * This method is invoked in response to
   * NSFileHandleConnectionAcceptedNotification
   */
- (void)spawnChildConnection:(NSNotification *)note
{
NSFileHandle *connectedSocket = [[note userInfo]
      objectForKey:NSFileHandleNotificationFileHandleItem];

  NSNotificationCenter *nc;
  nc = [NSNotificationCenter defaultNotificationCenter];

  [nc addObserver:self
      selector:@selector(processClientData:)
          name:NSFileHandleReadCompletionNotification
        object:connectedSocket];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
  // Send a message to the client, acknowledging that the connection was accepted
  [connectedSocket writeData:ackData];

  [connectedSocket readInBackgroundAndNotify];
}

  /*
   * This method is invoked in response to
   * NSFileHandleReadCompletionNotification
   */
- (void)processClientData:(NSNotification *)note
{
  NSData *data = [[note userInfo]
      objectForKey:NSFileHandleNotificationDataItem];

  // Do something here with your data

  // Tell file handle to continue waiting for data
  [[note object] readInBackgroundAndNotify];
}
```

Example 6-9 shows a client infrastructure using `NSFileHandle`.

## Example 6-9. Using NSFileHandle on the client side

```
- (void)startClient
{
  NSSocketPort *sockPort;
  sockPort = [[NSSocketPort alloc]
       initRemoteWithTCPPort:12345 host:@"10.0.1.3"];
  int sockFD = [sockPort socket];

  NSFileHandle *clientSocket;
  clientSocket = [[NSFileHandle alloc]
      initWithFileDescriptor:sockFD];

  NSNotificationCenter *nc;
  nc = [NSNotificationCenter defaultNotificationCenter];
  [nc addObserver:self
         selector:@selector(processServerData:)
             name: NSFileHandleReadCompletionNotification
           object: clientSocket];

  [clientSocket writeData:dataToWrite];
  [clientSocket readInBackgroundAndNotify];
}

  /*
   * This method is invoked in response to
   * NSFileHandleReadCompletionNotification
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
   */
- (void) processServerData:(NSNotification *)note
{
  NSData *data = [[note userInfo]
      objectForKey:NSFileHandleNotificationDataItem];

  // Do something here with your data

  // Tell file handle to continue waiting for data
  [[note object] readInBackgroundAndNotify];
}
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 7. Interapplication Communication

Several of Cocoa's classes provide support for interapplication and interthread communication. The Foundation class `NSPipe` provides an interface to Unix pipes, a long-time staple of Unix interprocess communication (IPC). The Foundation framework also implements a distributed notification system whereby notifications (discussed in Chapter 2) are sent between applications. The `NSDistributedNotificationCenter` class registers observers with the distributed notification system.

Finally, Cocoa provides a means for high-level IPC, known as distributed objects, that permits object sharing across process boundaries, even on different computers. Figure 7-1 shows the classes involved in interprocess communication.

Figure 7-1. IPC classes



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 7.1 NSPipe

Instances of NSPipe represent a one-way channel for communication between two tasks. While one task pours data into one end of the pipe, another process reads that data out. You can create a pipe in two ways: with the convenience constructor pipe or with alloc and init. Every pipe has a read and a write end that objects connect to by retrieving NSFileHandle instances using the methods fileHandleForReading and fileHandleForWriting.

NSPipe is also *buffered*, which means that it can store data poured into the write end of the pipe up to a maximum amount that is defined by the underlying operating system. Example 7-1 shows you how to create a pipe by using NSPipe and NSTask.

Example 7-1. Using NSPipe to get data from an NSTask instance

```
// Instantiate and initialize a new task
NSTask *task = [[NSTask alloc] init];

// Create a pipe to communicate with the task
NSPipe *pipe = [[NSPipe alloc] init];

// Get a file handle to read from the pipe
NSFileHandle *readEnd = [pipe fileHandleForReading];

// Set the path to launch the task at
[task setLaunchPath:@"/bin/ls"];

// Set the arguments; ls takes the directory to list
[task setArguments:[NSArray arrayWithObject:@"/"]];

// Connect the pipe to the task's stdout
[task setStandardOutput:pipe];

// Launch the task
[task launch];

// Once it's launched we can read data from the pipe
NSData *stdOutData = [readEnd availableData];
NSLog(@"%s", [stdOutData bytes]);
```

## 7.1.1 Distributed Notifications

As noted in Chapter 2, the Foundation framework's notification system, supported by NSNotification and NSNotificationCenter, coordinates the actions of isolated objects within an application. NSDistributedNotificationCenter is used to receive and dispatch notifications sent between applications, making it possible for objects in one application to respond to changes to the

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

operating environment made by another (see Figure 7-2).

Figure 7-2. Distributed notification centers and notification centers

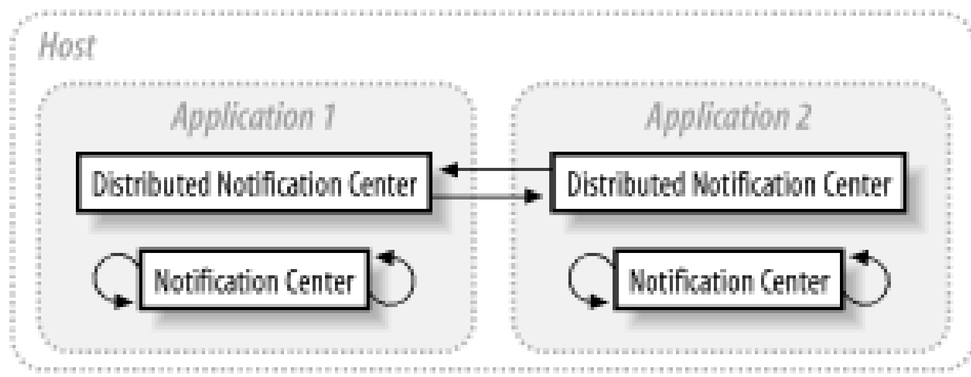

Distributed notifications are distributed only as far as applications on the local machine. They are not distributed in the same sense as *distributed objects*, for which communications can occur across a network.

`NSDistributedNotificationCenter` is a subclass of `NSNotificationCenter`, and its APIs are almost identical: both require observers to register for notifications, have a default center that is obtained with the `defaultCenter` class method, and use instances of `NSNotification` as the vehicle for communication.

Distributed notifications may be posted with standard `NSNotificationCenter` methods invoked in the distributed notification center:

- `postNotificationName:object`:
- `postNotificationName:object:userInfo`:

`NSDistributedNotificationCenter` provides an additional method: `postNotification-Name:object:userInfo:deliverImmediately`:

Posting with `deliverImmediately` set to `NO` permits normal suspension behavior (described later) of observers. If set to `YES`, the notification is delivered immediately to all observers, regardless of their suspension behavior or suspension state.

When considering the arguments to these methods, remember the two following points: First, since the "object" is passed to another process, which does not share the same address space, distributed notification filtering is based on an object's string value. Second, the `userInfo` dictionary is serialized as a property list, so it can be passed to another task (where it is deserialized back into a dictionary) This serialization imposes the restriction that you can only place objects that conform to the `NSCoding` protocol in the dictionary.

Example 7-2 shows how to set up a distributed notification.

Example 7-2. Using distributed notifications

```
/*
 * In one application we would register with the default
 * distributed notification center...
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
 */
- (void)registerForNotes
{
    NSDistributedNotificationCenter *dnc;
    dnc = [NSDistributedNotificationCenter defaultCenter];

    [dnc addObserver:self
         selector:@selector(handleDistributedNote:)
         name:@"CocoaNutDistributedNote"
         object:nil];
}

- (void)handleDistributedNote:(NSNotification *)note
{
    NSLog( @"Received Distributed Notification!" );
}

/*
 * ...and another application might post the notification
 */
- (void)postNotes
{
    NSDistributedNotificationCenter *dnc;
    dnc = [NSDistributedNotificationCenter defaultCenter];
    [dnc postNotificationName:@"CocoaNutDistributedNote"
         object:nil];
}
```

#### 7.1.1.1 Suspending delivery

Distributed notification centers can suspend notification delivery. This is done automatically by `NSApplication` when an application is not active. To suspend or resume notification delivery manually, use the method `setSuspended:`, passing `YES` or `NO` as appropriate. To inquire into the suspension state of a distributed notification center, use the`suspended` method.

Suspending a distributed notification center only suspends delivery of notifications by the distributed notification center, not the reception of distributed notifications. In addition to `NSNotificationCenter`'s `addObserver:selector: name:object:`, the `NSDistributedNotificationCenter` method `addObserver: selector:name:object:suspensionBehavior:` can add observers to a distributed notification center. This lets you specify how notifications that would otherwise be sent to the observer should be handled when delivery is suspended.

`NSDistributedNotificationCenter` has four constants, which are used to specify suspension behaviors:

`NSNotificationSuspensionBehaviorDrop`

> Notifications to observers with this suspension behavior are dropped without further consideration when notification delivery is suspended; it would be as if the notification were never received by the application.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSNotificationSuspensionBehaviorCoalesce

This suspension behavior causes multiple, identical notifications destined for the observer during suspension to be delivered as a single notification when suspension is lifted.

NSNotificationSuspensionBehaviorHold

Any notification received during delivery suspension is held and delivered to the observer when delivery suspension is removed.

NSNotificationSuspensionBehaviorDeliverImmediately

This behavior causes notifications to the observer to be delivered regardless of the suspension state.

When YES is passed to the postNotificationName:object:userInfo:deliverImmediately: method, the notification is delivered to all observers regardless of the suspension state of the respective distributed notification centers. Here notification posters have the power to override suspension, whereas observers can override suspension by using the last suspended behavior in the previous list.

## 7.1.2 Distributed Objects

Cocoa's distributed objects (DO) architecture provides a very high-level interface to interprocess communication. It also lets objects in one application transparently send messages to an object in another application, whether it is on the same or a different computer. Instances of NSDistantObject represent objects in a remote application. NSDistantObject is a subclass of NSProxy (the only other root class in Cocoa besides NSObject). NSDistantObject relies on the underlying architecture to forward messages and receive return values or exceptions.

### 7.1.2.1 DO architecture

Several Foundation classes participate in the distributed objects system. The primary interface for distributed objects, however, is through the class NSConnection, which vends objects on the server-side and connects to vended objects on the client-side. Each thread has a shared NSConnection object that is obtained through the class method defaultConnection.

NSConnection relies on several classes to provide support for distributed objects. The lowest-level communication in distributed objects occurs between a pair of NSPort objects. NSPort is an abstract class that provides an interface for raw messaging. Foundation implements three concrete subclasses of NSPort: NSMachPort, NSMessagePort, and NSSocketPort. These subclasses each implement the NSPort interface using a different technology. NSSocketPort, for example, supports port communications with BSD sockets.

NSConnection objects rely on port name registration services to contact one another and distribute objects. NSPortNameServer provides the interface to port name registration services. Foundation implements a subclass of NSPortNameServer for each of the three types of ports: NSMachBootstrapServer, NSMessagePortNameServer, and NSSocketPortNameServer.

Figure 7-3 shows how distributed object system classes interact.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Figure 7-3. The distributed objects system (classes are shown in bold)

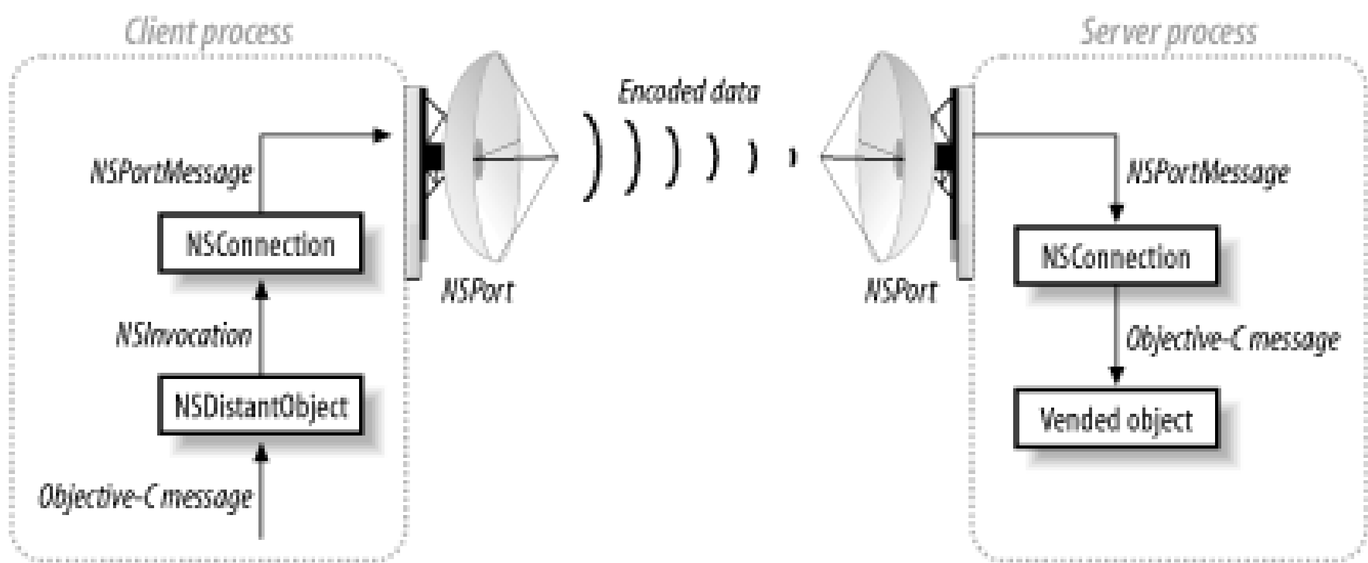


### 7.1.2.2 Setting up a server

To set up a server with an `NSConnection` instance, set the root object (the object to be vended) and register the connection. To set the root object, send the `NSConnection` instance a `setRootObject:` message. This method makes the specified object available to other processes as a distributed object. To register the connection, send it either `registerName:` or `registerName:withNameServer:`. The specified name is the one clients will use to access the vended object; the latter method also lets you specify an `NSPortNameServer` (see Example 7-3).

When a connection object vends a distributed object, it takes all necessary steps to create the port object and register the port with the port name registration server so other connection objects can locate the vended object.

Example 7-3. How a server vends an object

```
id anObject;  // Assume this object exists

// Get the default connection for the main thread
NSConnection *conn = [NSConnection defaultConnection];

// Set anObject as the root object of the connection
[conn setRootObject:anObject];

// Register the name of the connection so clients can get anObject
if ( [conn registerName:@"Server"] == NO ) {
  // If the name could not be registered, NO is returned
  // and we can handle the error
}
```

### 7.1.2.3 Connecting to a remote object

`NSConnection` instances also provide the route to remote objects from the client side. The class method `rootProxyForConnectionWithRegisteredName:host:` returns a proxy-an `NSDistantObject`--for the root object of the `NSConnection` with the specified name and host, registered with the default `NSPortNameServer`. You can also specify a port name server with `rootProxyForConnectionWithRegisteredName:host:usingNameServer:`. The host name should be

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

an Internet address, such as myserver.mydomain.com. Alternatively, by passing "*" as the host, you can specify that the connection should look for an object on all valid hosts. If the host name is nil or empty, then only the local host is searched.

Example 7-4 demonstrates the process by which a client obtains a vended distributed object.

### Example 7-4. How a client acquires a vended object

```
id remoteObject;

// Get a proxy to the root object of the connection registered to the name "Server"
remoteObject = [[NSConnection
    rootProxyForConnectionWithRegisteredName:@"Server"
    host:@"*"] retain];
```

### 7.1.2.4 DO and threads

Distributed objects can be used to communicate between two threads in the same application the same as it can communicate between two applications on hosts separated by great distances. When using distributed objects to communicate between two threads in the same application, consider the following points: For an NSConnection to run as a server, a run loop must handle incoming messages and requests. If you create the connection in the main thread of an NSApplication-based application, this is taken care of. However, if you vend an object from a different thread, you must tell the thread's run loop to start by sending a run message to the currentRunLoop of the thread.

### 7.1.2.5 Making DO more efficient and reliable

Although DO lets you send arbitrary messages to a remote object, doing so creates additional overhead. To encode a message's arguments for transmission over the network, the argument types must be known in advance. If they're not known, the system must send an initial message just to ge them, doubling the network traffic for every new message sent. Setting a protocol, by sending the proxy object a setProtocolForProxy: message, removes the need to define methods by the protocol.

```
// Set the protocol of the proxy
[remoteObject setProtocolForProxy:@protocol(rObjectProtocol)];
```

You can still send messages that are not declared in the protocol, but they will incur the additional message overhead. Establishing a protocol for the proxy has the additional benefit of imposing a known API. This reduces the risk that a message will be sent that the remote object does not implement.

You can also make the communication more efficient by employing special Objective-C keywords for distributed messaging. The oneway keyword, for example, is used with methods that return void. The following method might be implemented on a server:

```
-(void oneway)receiveString:(NSString *)string
{
    [self appendString:string];
}
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

When the client sends the proxy a `receiveString`: message, it does not require a return value. Without the `oneway` keyword, at least two messages will be sent across the network: the message itself, and a receipt. If the client does not need confirmation, the second message, and attendant overhead, are omitted.

Other keywords are: `in`, `out`, and `inout, bycopy` and `byref`, the latter two may only be used in protocol definitions. For more information, see */Developer/Documentation/Cocoa/ObjectiveC/4objc_runtime_overview/Remote_Messaging.html*.

### 7.1.2.6 Handling communication failures

Most errors in distributed systems behave the way they would in a standalone application. If you send a message to a remote object that the remote object does not implement, an exception is raised. One additional complication with distributed systems, however, is that the remote application might terminate. In the event of a communication failure-because the remote application has quit, or it has simply ceased to respond-the `NSConnection` object sends an `NSConnectionDidDieNotification` to the still-running application's default notification center. Registering for this notification might help you handle connection failures gracefully. You should also implement an `applicationWillTerminate` method to inform remote objects of your impending disappearance.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 8. Other Frameworks

Until this point, this book has focused on Cocoa's core frameworks, Foundation and Application Kit. However, Mac OS X contains *many* frameworks that you can leverage. Just look in */System/Libraray/Frameworks* to see how many there are, or launch the Apple System Profiler (*/Applications/Utilities*) and click on the Frameworks tab.

Not all frameworks, however, are implemented in Objective-C, as are the Foundation framework and Application Kit. Most Mac OS X frameworks are implemented in C since that language provides the most universal API that can be accessed by the widest range of application environments, including Cocoa. Several newer frameworks provide Objective-C interfaces in addition to C.

This chapter looks at some of the Objective-C frameworks provided by Apple. However, Apple isn't the only provider of frameworks. Many free and commercially available Objective-C frameworks are offered by other developers. Several of these third-party frameworks will be mentioned at the end of the chapter. This chapter covers additional Objective-C frameworks, including:

*AddressBook*

Provides classes that allow applications to interface with Mac OS X's global Address Book database.

*Message*

This small framework provides services to applications for sending email messages.

*DiscRecording and DiscRecordingUI*

These two frameworks provide access to the system's disc recording APIs, giving any Cocoa application the ability to burn data to CDs and DVDs.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 8.1 AddressBook

The AddressBook framework was released with Mac OS X 10.2. This framework provides a consistent, system-wide interface to a user's database of personal contacts. Using the AddressBook framework, applications can access the same information used in Apple's own suite of personal information management applications, including Mail, Address Book, iChat, iCal, and iSync. Figure 8-1 shows the AddressBook framework's class hierarchy.

Figure 8-1. The AddressBook framework class hierarchy

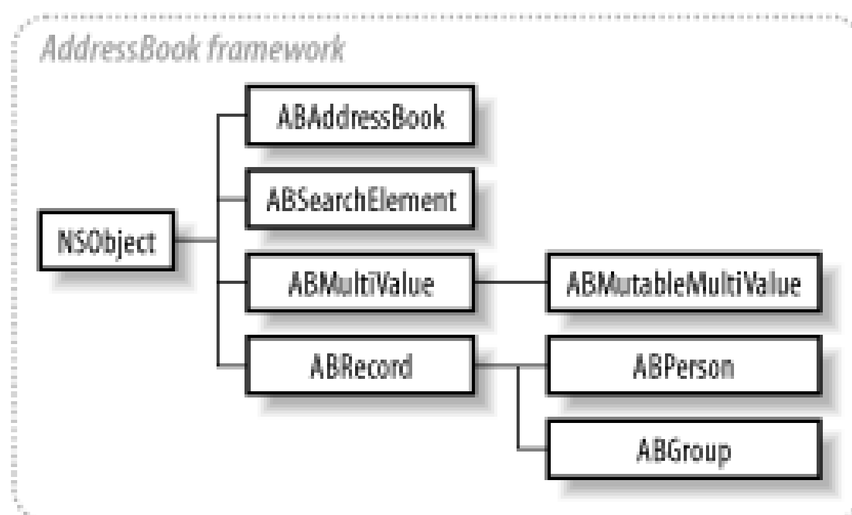


`ABAddressBook` is the main class representing the contacts database. The `ABAddressBook` class provides access to a collection of records, of two types: people and groups, represented by the classes `ABPerson` and `ABGroup`. `ABPerson` and `ABGroup` inherit from the class `ABRecord`, as shown in Figure 8-1. Records are like souped-up dictionaries that store information in property-value pairs (similar to `NSDictionary`'s key-value pairs, but `ABRecord` properties provide additional functionality).

Both people and group objects store properties, but they are not the same set of properties since a group does not share the characteristics of an individual. To retrieve the value of a property associated with a record, invoke the method `valueForProperty:` in the `ABRecord` object in question. To store a value for a record's property, use the method `setValue:forProperty:`.

`ABAddressBook` provides methods that access records in the database. The method `people` returns an `NSArray` filled with all `ABPerson` type records, while the method `groups` returns an `NSArray` containing all the Address Book's `ABGroup` type records. Records are added and removed using `addRecord:` and `removeRecord:`. Example 8-1 shows how to work with the AddressBook API.

Example 8-1. Working with the AddressBook framework

```
// Instantiate ABAddressBook
ABAddressBook *ab = [ABAddressBook sharedAddressBook];

// Access property values
ABPerson *me = [ab me];
NSString *fName = [me valueForProperty:kABFirstNameProperty];
NSString *lName = [me valueForProperty:kABLastNameProperty];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Set a property value
[me setValue:@"Michael" forProperty:kABFirstNameProperty];

// Get an array of all people in Address Book
NSArray *everyone = [ab people];

// ...and all groups
NSArray *groups = [ab groups];

// Create a new record
ABPerson *newPerson = [[ABPerson alloc] init];

// Add a record to the Address Book
[ab addRecord: newPerson];

// Remove a record from the Address Book
[ab removeRecord: me];

// Set "me"
[ab setMe:newPerson];

// Save changes to disk
[ab save];
```

Tables Table 8-1 and Table 8-2 show the property strings predefined by the AddressBook framework. Table 8-1 contains properties used exclusively by `ABPerson` objects, while Table 8-2 lists properties common to people and groups. `ABGroup` has an additional exclusive property, `kABGroupNameProperty`, which is the name of the group record.

### Table 8-1. Property keys used in the AddressBook framework specific to ABPerson records

| Property key | Description |
|---|---|
| `kABFirstNameProperty` | A person's first name as an `NSString` |
| `kABLastNameProperty` | A person's last name as an `NSString` |
| `kABFirstNamePhoneticProperty` | The phonetic spelling of the person's first name to aid pronunciation |
| `kABLastNamePhoneticProperty` | The phonetic spelling of the person's last name to aid pronunciation |
| `kABBirthdayProperty` | The person's birthday as an `NSDate` |
| `kABOrganizationProperty` | The person's affiliation as an `NSString` |
| `kABJobTitleProperty` | The job title of the person as an `NSString` |

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| Property key | Description |
|---|---|
| kABHomePageProperty | The home page of the person as an NSString |
| kABEmailProperty | The email property for a person as an ABMultiValue of NSStrings (multistring). Values are labeled by kABEmailWorkLabel and kABEmailHomeLabel |
| kABAddressProperty | The address of a person as an NSDictionary multivalue with the labels kABAddressHomeLabel and kABAddressWorkLabel |
| kABPhoneProperty | Phone numbers of person as a multistring with the following labels: kABPhoneWorkLabel, kABPhoneHomeLabel, kABPhoneMobileLabel, kABPhoneMainLabel, kABPhoneHomeFAXLabel, kABPhoneWorkFAXLabel, and kABPhonePagerLabel |
| kABAIMInstantProperty | The AIM screen name of person as a multistring with two labels: kABAIMWorkLabel, and kABAIMHomeLabel |
| kABJabberInstantProperty | The Jabber screen name of person as a multistring with two labels: kABJabberWorkLabel and kABJabberHomeLabel |
| kABMSNInstantProperty | The MSN screen name of person as a multistring with two labels: kABMSNWorkLabel and kABMSNHomeLabel |
| kABYahooInstantProperty | The Yahoo screen name of person as a multistring with two labels: kABYahooWorkLabel and kABYahooHomeLabel |
| kABICQInstantProperty | The ICQ screen name of person as a multistring with two labels: kABICQWorkLabel and kABICQHomeLabel |
| kABNoteProperty | The property whose values are an NSString note about the record |

Table 8-2. Properties applicable to ABRecord objects (people and groups)

| Property key | Description |
|---|---|
| kABUIDProperty | The UID (unique identifier) property of a record as an NSString |
| kABCreationDateProperty | The date on which the record was created as an NSDate |
| kABModificationDateProperty | NSDate specifies the last modification date of the record |

In Example 8-1, the save method is invoked in the last line of code, saving changes to the database. Until the save method is invoked, changes only exist in memory, and are not reflected on disk. Once the changes are saved, other applications that use the AddressBook framework are notified that changes have been made to the database (see Section 8.1.4 later in this chapter for more information on how this is accomplished).

## 8.1.1 Working with Multiple-Value Objects

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Many property values in the AddressBook are typed as `ABMultiValue`, which is an object that stores multiple values for a single property. To understand why this might be useful, consider that people tend to have several phone numbers, email addresses, and a work and home address. Rather than create several separate properties for a work and home address, AddressBook defines a generic address property with an `ABMultiValue` value type.

An `ABMultiValue` stores the multiple values for a property by index. Each property has a unique identifier, a string label, and a value. Generally, the label is a combination of the property name and "home" or "work" (as shown in Table 8-1). However, it is possible to customize labels for additional values in the multivalue object (such as a summer vacation home address in addition to home and work addresses).

A *primary identifier*, associated with each multivalued property, identifies the subvalue of the multivalue property that a user most strongly associates with a person. For example, if you interact with a person purely on a professional basis, then the primary identifier for that contact's phone property would be for the work value. You can set this identifier in a `ABMutableMultiValue` with the method `setPrimaryIdentifier:`.

You can access values in an `ABMultiValue` object by index with `valueAtIndex:`. It is also possible to access the label and identifier of the object at a particular index with `labelAtIndex:` and `identifierAtIndex:`.

To demonstrate the use of multivalue objects, look closely at `kABAddressProperty`, which is of particular interest since it contains `NSDictionary` objects as values rather than simple strings. The AddressBook API defines keys used to store values within an address property dictionary. Table 8-3 lists the keys that access values in the dictionaries for `kABAddressProperty`.

### Table 8-3. Keys of the address dictionary

| Dictionary key | Description |
|---|---|
| `kABAddressStreetKey` | The person's street name and number |
| `kABAddressCityKey` | The person's city |
| `kABAddressStateKey` | The person's state |
| `kABAddressZIPKey` | The zip code of the address |
| `kABAddressCountryKey` | The country name of the address |
| `kABAddressCountryCodeKey` | The two character country code. These standard ISO country codes can be found in the header file *ABGlobals.h* |

Example 8-2 shows how to work with the address property and other multi-valued properties in `ABPerson`.

### Example 8-2. Working with multivalued properties such as kABAddressProperty

```
ABMultiValue *addr = [p valueForProperty:kABAddressProperty];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
int i = [addr indexForIdentifier:[addr primaryIdentifier]];
NSDictionary *prim = [addr valueAtIndex:i];
NSString *street = [prim objectForKey:kABAddressStreetKey];
NSString *state = [prim objectForKey:kABAddressStateKey];

ABMultiValue *aim = [p valueForProperty:kABAIMInstantProperty];

// This statement determines the number of values in the multi-value
int n = [aim count];

NSString *aim1 = [aim valueAtIndex:0];
```

## 8.1.2 Defining New Properties

It is possible to define your own application-specific keys to store data about a person or group in the contacts database. Because the database contains structured data that can hold values of any property name, the only applications that need know about these additional properties are those that actively look for them. Thus, there is no need to have two separate interfaces for interacting with AddressBook information and information specific to your application.

Add properties to a record by invoking the `ABGroup` or `ABPerson` class method `addPropertiesAndTypes:`. The argument for this method is a dictionary containing the property names as keys and the property types as values. The property type may be one of the following single or multivalue types shown in Table 8-4.

Table 8-4. Single- and multiple-value types

| Data type | Single value | Multiple value |
|---|---|---|
| `NSString` | `KABStringProperty` | `kABMultiStringProperty` |
| `NSNumber (int)` | `KABIntegerProperty` | `kABMultiIntegerProperty` |
| `NSNumber (float)` | `KABRealProperty` | `kABMultiRealProperty` |
| `NSDate` | `KABDateProperty` | `kABMultiDateProperty` |
| `NSArray` | `KABArrayProperty` | `kABMultiArrayProperty` |
| `NSDictionary` | `KABDictionaryProperty` | `kABMultiDictionaryProperty` |
| `NSData` | `KABDataProperty` | `kABMultiDataProperty` |

Example 8-3 shows how to add property-value pairs to a record.

Example 8-3. Defining new properties for a record

```
NSMutableDictionary *newProps = [NSMutableDictionary dictionary];
[newProps setObject:kABStringProperty forKey:@"College"];
[newProps setObject:kABDateProperty forKey:@"Grad Date"];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
[ABPerson addPropertiesAndTypes:newProps];

ABAddressBook *ab = [ABAddressBook sharedAddressBook];
ABPerson *me = [ab me];
NSString *c = @"The University of Texas at Austin";
NSDate *d = [NSDate dateWithNaturalLanguageString:@"12/12/02"];
[me setValue:c forProperty:@"College"];
[me setValue:d forProperty:@"Grad Date"];
```

### 8.1.3 Searching

The AddressBook framework supports searching with the `ABSearchElement` class. You can create instances of this class with the `ABPerson` or `ABGroup` class method `searchElementForProperty:label:key:value:comparison:`, to which you supply the following search criteria:

`searchElementForProperty`:

The record property that will be searched for.

`label`:

If the property has multiple values, a label can be specified to restrict the search to one particular element of the multivalue.

`key`:

If the property value is a dictionary, the search will be done on the value of the dictionary key specified in this parameter. For example, you could pass `kABAddressCityKey` here if you want to perform a search against the city of the contact.

`value`:

The value you are searching for in the property.

`comparison`:

This parameter specifies how the search process identifies a value as a match. Table 8-5 lists the comparison constants for this parameter.

The `searchElementForProperty:label:key:value:comparison:` method searches for people or groups, depending on whether it is implemented in the `ABPerson` or `ABGroup` class object, respectively.

A search is performed on the AddressBook database by `ABAddressBook` method `recordsMatchingSearchElement:`, to which you supply the search element object containing your search criteria. This method returns an array of `ABPeople` objects or `ABGroup` objects-depending on which of these two classes you created the search element in-that contains the search results.

Table 8-5. Comparison constants used by ABSearchElement

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| Comparison constant | Description |
|---|---|
| kABEqual | Returns records equal to the search value |
| kABNotEqual | Returns records not equal to the search element value |
| kABEqualCaseInsensitive | Returns records equal when case is ignored |
| kABLessThan | Searches for records whose value is less than the search value |
| kABLessThanOrEqual | Searches for elements less than or equal to the value |
| kABGreaterThan | Searches for elements greater than the search value |
| kABGreaterThanOrEqual | Searches for elements greater than or equal to the search value |
| kABContainsSubStringCaseInsensitive | Searches for records whose value contains the search value as a substring, disregarding case |
| kABPrefixMatch | Searches for elements that contain the search value as a prefix |
| kABPrefixMatchCaseInsensitive | Same as kABPrefixMatch, except case-insensitive |

ABSearchElement's searchElementForConjunction:children: method can create arbitrarily complex searches by combining search elements into composite search elements using either the kABAndSearch or the kABOrSearch conjunction. The search elements to be combined into the complex search are passed as an array in the children: argument.

Example 8-4 shows how to perform searches in the AddressBook framework.

## Example 8-4. Constructing and performing searches

```
ABSearchElement *se1, *se2, *se3;
NSArray *results, *seChildren;

ABAddressBook *ab = [ABAddressBook sharedAddressBook];

// Search against a simple, single-value property
se1 = [ABPerson searchElementForProperty:kABFirstNameProperty
                                label:nil
                                key:nil
                                value:@"Michael"
                                comparison:kABEqual];
results = [ab recordsMatchingSearchElement:se1];

// Search against a key of the kABAddressProperty
se2 = [ABPerson searchElementForProperty:kABAddressProperty
                                label:nil
                                key:kABAddressCityKey
                                value:@"Houston"
                                comparison:kABEqual];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
results = [ab recordsMatchingSearchElement:se2];

// Perform a complex search by combining search elements
seChildren = [NSArray arrayWithObjects:se1, se2, nil];
se3 = [ABSearchElement searchElementForConjunction:kABAndSearch
                                children: seChildren];
```

## 8.1.4 Notifications

The AddressBook framework API defines two notifications that applications may register to observe so they may be notified of changes to the AddressBook database:

`kABDatabaseChangedNotification`

Notifies observers of changes the application makes to the database

`kABDatabaseChangedExternallyNotification`

Notifies an observer that another application has changed the database

## 8.1.5 Odds and Ends

You can perform a couple of other operations with records beyond just storing name/value pairs: importing and exporting a vCard representation or associating an image with a person.

### 8.1.5.1 Creating a vCard from a record

Creating a vCard is easily accomplished by using the `ABRecord` method `vCardRepresentation`. This method returns an `NSData` object whose data is formatted in the vCard format. This data is written to disk, where it can be read by any number of applications that recognize the vCard format. Going the other way, you can initialize an `ABRecord` object with vCard data using `initWithVCardRepresentation:`. This method takes as a parameter an `NSData` object, which could be initialized with the contents of a vCard file on disk.

### 8.1.5.2 Adding an image to a record

To associate an image with a person in the AddressBook, use the methods `setTIFFImageData:` and `TIFFImageData` to set and get the person's picture. These methods work with `NSData` objects whose data is formatted as a TIFF image. These methods interface well with the `NSImage` methods `TIFFRepresentation`, which returns an TIFF-formatted `NSData` object, and `initWithData:`, which initializes an `NSImage` object with image data. Example 8-5 shows how to access image data in an Address Book record.

Example 8-5. Accessing image data in a record

```
// Assign an image to a record
NSData *imageData = [[NSData alloc]
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
                                initWithContentsOfFile:@"image.tiff"];
ABAddressBook *ab = [ABAddressBook sharedAddressBook];
ABRecord *me = [ab me];

[me setTIFFImageData: imageData];
[ab save];

// Retrieve a record's image
NSImage *anImage = [[NSImage alloc] initWithData: [me imageData]];
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 8.2 The Message Framework

The message framework, consisting of the single `NSMailDelivery` class, provides the functionality needed to send email messages from within an application. The `NSMailDelivery` class defines three methods:

- `hasDeliveryClassBeenConfigured`
- `deliverMessage:headers:format:protocol:`
- `deliverMessage:subject:to:`

The first method, `hasDeliveryClassBeenConfigured`, returns a `BOOL` value that indicates whether the operating system is configured to send messages. To make sure that any attempt to send a message is not in vain, invoke this method before sending a message, and handle appropriately if `NO` is returned. Message sending is enabled by configuring a default email account in the Internet System Preferences pane.

The second method, `deliverMessage:headers:format:protocol:`, delivers a message whose text is contained in an `NSAttributedString`. The standard message headers, such as "To", "From", and "Subject", are passed in the `headers:` parameter as a dictionary. In this dictionary, the key is the header name. For example, the recipient's email address would be an `NSString` value in the dictionary for the key `@"To"`. Example 8-6 shows how to use this dictionary and the mail delivery methods.

The third parameter specifies the message's format, which can be one of two constants: `NSASCIIMailFormat` or `NSMIMEMailFormat`. If `NSASCIIMailFormat` is specified as the format, then the attributed string is stripped of any rich text formatting information. `NSMIMEMailFormat`, on the other hand, preserves the rich text formatting when sending the message.

The final argument specifies the protocol used to deliver the message. Passing `nil`, which causes the delivery to default to the system default protocol, is preferable. The other choice is to pass the constant `NSSMTPDeliveryProtocol`, specifying that the method should be delivered with the SMTP protocol.

The final method defined in `NSMailDelivery` is `deliverMessage:subject:to:`. This convenience method sends the first argument's plain text `NSString` to the sender specified in the last argument. The `subject:` argument specifies a subject for the message.

### Example 8-6. Using the message framework class NSMailDelivery

```
BOOL status = NO;

// Send an attribute string message
NSAttributedString *msg = [[NSAtrributedString strin alloc]
      initWithString:@"This is a message with no formatting."];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSMutableDictionary * hdrs = [NSMutableDictionary dictionary];
[hdrs setObject:@"someone@someplace.com" forKey:@"To"];
[hdrs setObject:@"me@myplace.com" forKey:@"From"];
[hdrs setObject:@"Boring email" forKey:@"Subject"];

status = [NSMailDelivery deliverMessage:msg
       headers:hdrs
        format:NSASCIIMailFormat
      protocol:nil];

// Use the convenience method
status = [NSMailDelivery deliverMessage:@"This is another boring email message."
         subject:@"Nothing to important"
              to:@"someone@somplace.com"];
```

In this example, the variable `status` was set to the return value of the message delivery methods. The return values from these two methods indicate whether or not the message was successfully sent.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 8.3 Disc Recording Frameworks

The ability to burn data to CDs and DVDs is a centerpiece of the Mac and Apple's Digital Hub strategy. Nearly every Mac sold today can record to CD or DVD media. This creates an opportunity for application developers to provide features in their applications that take advantage of a system's built-in disc burning capabilities.

With Mac OS X 10.2, Apple released two Objective-C frameworks that let applications take advantage of disc capabilities present in most new Macs. These frameworks are *DiscRecording* and *DiscRecordingUI*. Together, they provide an API for assembling content in preparation for recording and performing disc burn and erase operations.

The functionality of the Disc Recoding API is split between two frameworks for a good reason. DiscRecording provides the bulk of the API used for creating content and managing burn operations. DiscRecordingUI, on the other hand, provides no more than several `NSPanel` subclasses that implement standard user interfaces that applications can use to quickly configure and perform burn and erase operations. By separating the presentation from the mechanics, non-GUI applications can use the DiscRecording APIs. This section begins with a discussion of the DiscRecording framework and finishes with an overview of DiscRecordingUI.

## 8.3.1 The DiscRecording Framework

The DiscRecording framework provides classes that represent the fundamental parts of a recording process. DiscRecording has APIs that assemble filesystem hierarchies that will be recorded to disc, and APIs that record audio. Figure 8-2 shows this framework's class hierarchy.

Figure 8-2. DiscRecording framework class hierarchy

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

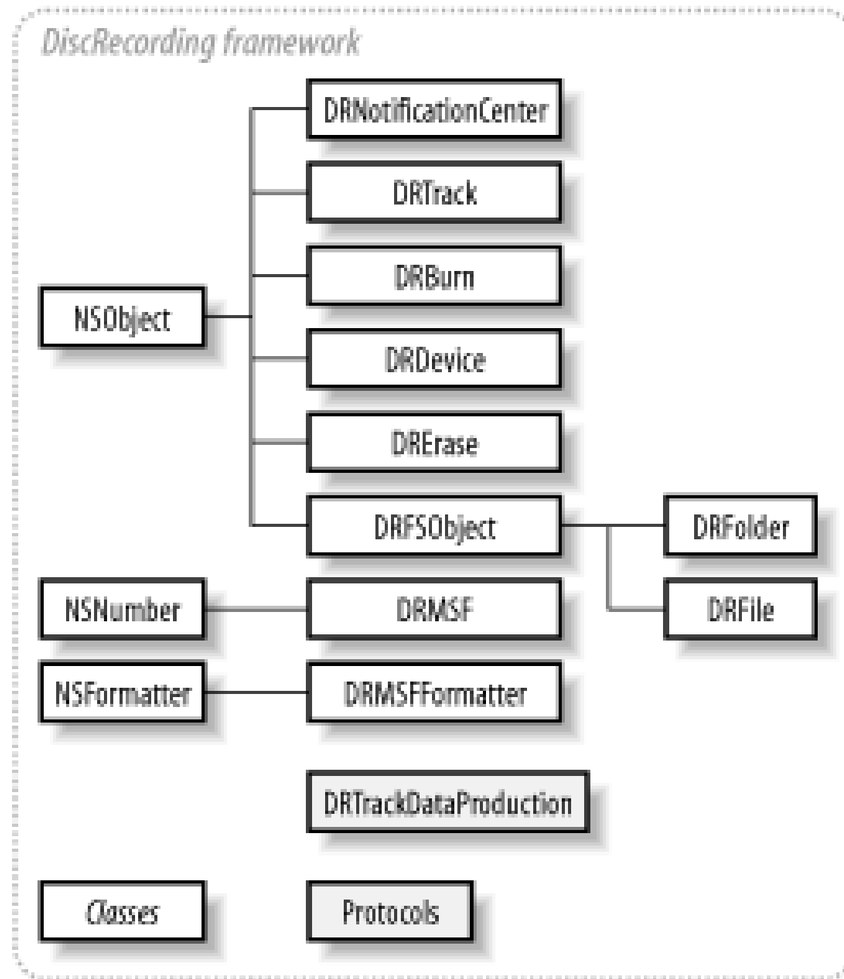


The DiscRecording API provides a means to perform two primary tasks that people need their disc recording hardware to accomplish: burning a disc and erasing a disc's contents. These two tasks are represented by the classes `DRBurn` and `DRErase`.

### 8.3.1.1 DRBurn

`DRBurn` manages the process of burning a disc. The interface for this class provides several methods used to configure the burn process. Specifically, `DRBurn` lets you control the behavior of the burn process and specify how media should be handled after it is recorded to (i.e., should the disc be ejected or mounted as a filesystem).

To initialize a `DRBurn` object, use the method `initWithDevice:`. This initializer takes a `DRDevice` object, which represents the physical hardware device used for recording. All `DRErase` and `DRBurn` objects have an associated instance of `DRDevice` that provides information about and controls the hardware. Generally, you won't need to interact with `DRDevice` objects, except when you need to obtain information about the device, such as its make and model number. Device objects are configured and used mainly by the burning engine.

Use `setProperties:` to configure burn objects. Table 8-6 enumerates the keys used in this dictionary.

Table 8-6. Keys used in the burn properties dictionary

| Key | Description |
|---|---|
| `DRBurnRequestedSpeedKey` | `NSNumber` containing a float that specifies the burn speed in kilobytes per second. The default is `DRDeviceBurnSpeedMax`. |

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| Key | Description |
|---|---|
| DRBurnAppendableKey | BOOL specifying whether the disc should be appendable after the initial burn. The default is NO. |
| DRBurnVerifyDiscKey | BOOL specifying whether the burn should be verified. The default is YES. |
| DRBurnCompletionActionKey | Specifies the action that should occur after the burn is completed. The options are the default, DRBurnCompletionActionEject, and DRBurnCompletionActionMount. |
| DRBurnUnderrunProtectionKey | BOOL that turns run protection on and off for devices that support it. The default is YES. |
| DRBurnTestingKey | BOOL specifying if the burn should be run as a test burn. The default is NO. |
| DRSynchronousBehaviorKey | BOOL specifying if burn operations will behave synchronously. The default is NO. |

### 8.3.1.2 DRErase

DRErase represents a disc erasure operation. Like DRBurn objects, DRErase instances are initialized with initWithDevice:. The DiscRecording API supports two types of operations: a quick erase and a complete erase. A quick erase does the minimum amount of work needed to make a disc appear blank, while a complete erase makes sure that every byte of data on the disc is erased. Quick erases the default type for DRErase, take a couple of minutes to perform, whereas a complete erase can take up to a half an hour.

These two erase types are specified in the API by the constant NSString objects DREraseTypeQuick and DREraseTypeComplete. To specify the type of erase, use the method setEraseType:. The eraseType method returns the current type.

Once an erase object is configured, the erasure operation executes by invoking the start method. This method returns control to the sender immediately. The sender can retrieve information about the progress of an erase operation by polling the status method or listening for notifications.

### 8.3.1.3 DRTrack

DRTrack provides the burn with data and describes the track used to burn the data to disc. Instances of DRTrack do not actually store the data that will be recorded; rather, track objects are used as an interface to a data producer that provides the actual data. The DiscRecording framework defines the DRTrackDataProduction protocol to which classes should conform if they want to provide data for a DRTrack object.

Providing data is only part of DRTrack's responsibility. It is also responsible for providing properties o the actual track that will be written to disk. This is done by setting track properties with the setProperties: method. This method takes a dictionary, whose keys come from those listed in Table 8-7. Each key listed in this table must have a value assigned to it, or the burn will fail. The Mt. Fuji (IFF-8090i) specification for CD/DVD devices defines the values these properties may take.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Table 8-7. Required properties for a fully configured DRTrack object

| Property key | Description |
|---|---|
| DRTrackLengthKey | Length of the track |
| DRBlockSizeKey | Size of each block measured in bytes |
| DRBlockTypeKey | Type of each block in the track |
| DRDataFormKey | Data form of each track block |
| DRSessionFormatKey | Session format of the track |
| DRTrackModeKey | Mode of the track |

DRTrack provides two convenience constructors that prepare a DRTrack to burn audio to a disc or the data contained in a directory structure: trackWithAudioOfLength:producer: for audio and trackForRootFolder: for data.

### 8.3.1.4 Preparing audio content

trackWithAudioOfLength:producer: provides audio content to record. In the first parameter, the length's value is specified as an instance of the class DRMSF. This subclass of NSNumber represents lengths and positions on a disc by minutes, seconds, and frames (thus the MSF moniker). A frame is a subdivision of a second, and there are 75 frames in a second. A frame corresponds to one block on a track, and is thus the smallest possible division of space on a disc. The producer: parameter is an object that conforms to the DRTrackDataProduction protocol. The data producer prepares data and provides it to the track during the burn process.

### 8.3.1.5 Preparing data content

The second DRTrack convenience constructor is trackForRootFolder:. This method takes a single parameter, which is of type DRFolder. DRFolder is one of two subclasses of the class DRFSObject, which represents a generic filesystem object. The other subclass is DRFile. DRFile and DRFolder both construct a filesystem that will be reproduced on a CD or DVD.

To successfully create a data track, you need to know that files and folders are related to one anothe in a one-to-many, parent-child relationship, and are arranged in trees. Thus, each folder in the structure may have many children, which are folders or files, and each child has exactly one parent, which must be a folder. Only folders may have children; files may not. This mirrors the organization of any filesystem you're used to working with. Additionally, files and folders may either be *real* or *virtual*. A real file or folder corresponds to a real file or folder that exists on the user's source volume Because they represent actual objects in the source filesystem, real filesystem objects may not be modified once they are added to the data track preparation.

To create a real DRFile, use either the convenience constructor fileWithPath: or the initializer initWithPath:. Both methods take as an argument the path to an actual file on disk. A DRFile object is capable of representing real files, aliases, and symbolically linked files. Similarly, to create a

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

real DRFolder, use either the convenience constructor folderWithPath: or the initializer initWithPath:.

A virtual filesystem object is a placeholder for a file or folder that will be created when the filesystem is written to the disc. The process of assembling virtual files and folders is often referred to as creating a filesystem in the API, referring to the methods in DRFile and DRFolder used to construct the filesystem. Using virtual folders, a program can construct a filesystem that will be created on the disc by adding children to folder objects. These children may be real or virtual DRFSObjects. Virtual DRFolders are the only filesystem objects that may contain children. Thus real files and folders, and virtual files, are all leaf nodes in the filesystem.

When a virtual filesystem object is created, a name is assigned to the object that will be the file or folder name in the end product. Virtual files are also assigned an NSData object that contains what will become the file contents on the destination media. Alternatively, a virtual file object can be associated with an object that conforms to the DRDataTrackProduction protocol as a means of creating a file's contents. You can create a virtual folder by invoking the DRFolder class method folderWithName: or the initializer initWithName:. Virtual files may be created with virtualFileWithName:data: or virtualFileWithName:dataProducer:. In the former method, the parameter is an NSData object, while the latter method requires an object that conforms to the DRTrackDataProduction protocol. There are also equivalent initializers, initWithName:data: and initWithName:dataProducer:.

Children are added to a DRFolder by invoking the method addChild:, and they are removed using the method removeChild:. The count method returns the number of children within a folder.. children returns an NSArray of a folder's children. While a real folder may not have any children, you can convert a real folder into a virtual folder to add children to the directory structure. When a folder is converted from real to virtual, the converted folder's pre-existing contents remain real. Real folders are made virtual by invoking makeVirtual. Once a filesystem structure is created-by choosing a real file or folder or building one from scratch using a combination of real and virtual filesystem objects-the root DRFolder of the tree creates a DRTrack with the convenience constructor trackForRootFolder:.

Example 8-7 shows how to prepare data to be burned to disc.

## Example 8-7. Preparing data for burning

```
// Prepare a real folder or file
DRFolder *rFolder = [DRFolder folderWithPath:@"/Users/mike"];
DRFile *rFile = [DRFile fileWithPath:@"/Users/mike/someDoc.txt"];

// Work with virtual filesystem objects
DRFolder *root = [DRFolder folderWithName:@"Root Folder"];
DRFile *vFile = [DRFile fileWithName:@"Fake File" data:someNSData];

[rFolder makeVirtual];
[rFolder addChild:vFile];
[root addChild:rFolder];
[root addChild:rFile];

// Create a DRTrack object to hold the data
DRTrack *track = [DRTrack trackForRootFolder:root];
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

## 8.3.2 The DiscRecordingUI Framework

DiscRecordingUI implements a standard front-end interface to the DiscRecording framework. From reading the previous section, you know that instances of the classes`DRBurn` and `DRErase` represent burn and erase operations. The classes of DiscRecordingUI provide an interface to configure instances of `DRBurn` and `DRErase`, as well as monitor the progress of recording and erase operations.

Figure 8-3 shows the classes of the DiscRecordingUI framework. Each one is a subclass of`NSPanel`. `DRSetupPanel` is an abstract superclass that provides facilities for device selection and handling needed by burn and erase setup panels.

Figure 8-3. DiscRecordingUI framework class hierarchy

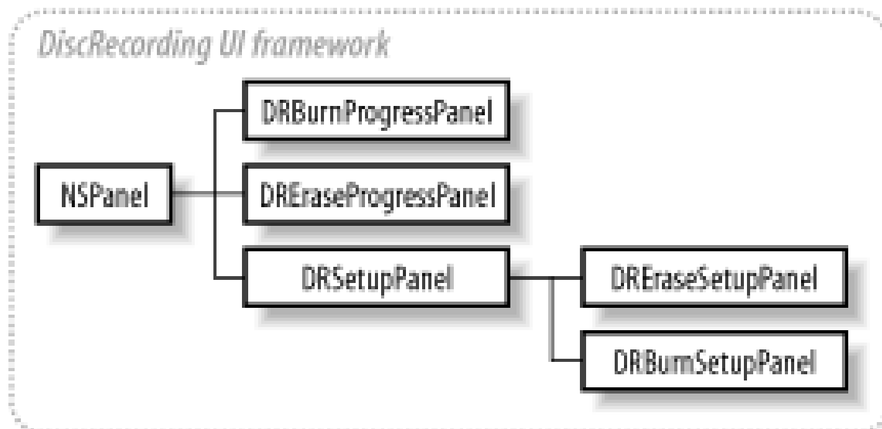


`DRBurnSetupPanel`, shown in Figure 8-4, is an interface that configures and executes a burn operation. `DREraseSetupPanel`, shown in Figure 8-5, provides an interface for configuring and executing disc erase operations.

Figure 8-4. The burn disc panel

Figure 8-5. The erase disc panel

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### 8.3.2.1 How to record

To create a burn or erase setup panel, invoke `setupPanel` in either `DRBurnSetupPanel` or `DREraseSetupPanel`. Once an instance of either class is obtained, invoke the `DRSetupPanel` method `runSetupPanel`, which displays the panel on the screen. Setup panels run as *modal windows*, which means you can't interact with any other part of the application while the window is open.

The method `runSetupPanel` is blocking, so execution in the thread it was invoked in stops until the user clicks the panel's Cancel or Burn/Erase buttons. This method returns with an `int`, indicating which button the user clicked. The return value is equal to one of the constants `NSOKButton` or `NSCancelButton`. This return value determines the next course of action: either continue on with our application or begin a burn/erase operation.

In the case of a burn setup panel, after determining that the Burn button was pressed, we can obtain an instance of `DRBurn` whose state reflects the configuration made in the setup panel. This object is obtained with the method `burnObject`.

The next step, after preparing your layout is to instantiate `DRBurnProgressPanel` and start the burn process. To create a burn progress panel, invoke the class method `progressPanel`. You can start burn operations by using `beginProgressPanelForBurn:layout:`, to which you supply our burn object and the object representing your layout. Example 8-8 performs these tasks in code.

### Example 8-8. Using setup panels in DiscRecordingUI

```
- (IBAction)showBurnPanel:(id)sender
{
  DRBurnSetupPanel *bp = [DRBurnSetupPanel setupPanel];
  int status = [bp runSetupPanel];

  if ( status == NSOKButton ) {
      DRBurn *burn = [bp burnObject];
      DRBurnProgressPanel *pp = [DRBurnProgressPanel progressPanel];

      // Assume aLayout has been prepared previously
      [pp beginProgressPanelForBurn: burn layout:aLayout];
  }
}
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 8.4 Third-Party Frameworks

In addition to the frameworks provided by Apple, several third-party objective frameworks are available. One of the most notable is the collection of frameworks from The Omni Group.Omni makes not only the same frameworks developers use in their applications, but also the source code for the frameworks.

Omni provides the following frameworks, whose source code can be downloaded fromOmni's developer web site (http://www.omnigroup.com/developer/sourcecode):

OmniBase

This framework provides several low-level classes that provide allocation and initialization debugging aids, classes that aid interaction with the Objective-C runtime, and an exception handling mechanism that is an alternative to the standard one provided in Cocoa.

OmniFoundation

This framework provides several extensions to Cocoa's Foundation framework, including classes that handle strings, scanning, and regular expressions.

OmniNetworking

This framework is an Objective-C wrapper to the networking libraries that already exist in Mac OS X. OmniNetworking supports major networking protocols such as Multicast, TCP, and UDP.

OmniAppKit

This framework provides lots of neat controls, such as a calendar and chasing arrows, as well as larger application components such as a skeletal preferences system and Find panel.

OWF

The Omni Web Framework is the base architecture for OmniWeb that handles all content retrieval and parsing, and other functions related to Internet application development. Omni says: "If OmniFoundation is the Objective-C programmer's Swiss Army Knife, then OWF is thei double barrel, rotary laser cannon."

OmniHTML

This framework handles HTML parsing and is also used in OmniWeb.

These frameworks provide no documentation. However, with the source code available, learning how to use them should be fun.

Another notable framework is the MiscKit, maintained by the Object Foundation. The framework contains a plethora of miscellany. Undoubtedly, many of you will find the offerings of theMiscKit useful and interesting. Information about MiscKit, as well as resources and the actual framework, is available at http://www.misckit.com.

In addition to these larger frameworks, many smaller collections of classes are constantly growing and improving. The Cocoa development community is outputting several free, open source classes. The Softtrak software database, available on Stepwise's site (http://www.stepwise.com), maintains

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

information about the third-party frameworks available for Cocoa.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Part II: API Quick Reference

This part of the book provides a quick reference to Cocoa's primary frameworks: Foundation and Application Kit. This part starts out with a quick overview of how to use the Cocoa quick reference to better help you understand its organization and structure. The chapters in this part aren't meant to be read from start to finish, but instead are intended to be used as a reference to keep by your side while programming.

Chapters in this part of the book include:

*Chapter 9*, *Foundation Types and Constants*

*Chapter 10*, *Foundation Functions*

*Chapter 11*, *Application Kit Types and Constants*

*Chapter 12*, *Application Kit Functions*

*Chapter 13*, *Foundation Classes*

*Chapter 14*, *Foundation Protocols*

*Chapter 15*, *Application Kit Classes*

*Chapter 16*, *Application Kit Protocols*

Additionally, Part II begins with an explanation of *How to Use This Quick Reference*, and wraps up with an index (Method Index) that contains an alphabetical listing of every method in the Foundation and Application Kit frameworks, called the *Method Index*.

## How to Use This Quick Reference

Part II crams a great deal of information about Cocoa into a relatively small space. In this chapter we take a look at how this information is organized and how to read the quick-reference entries.

### Organization of the Quick Reference

Chapter 13 and Chapter 15 cover the classes of the Foundation and Application Kit frameworks. Chapter 14 and Chapter 16 contain quick-reference entries for the protocols of these two frameworks. Within these four chapters quick-reference entries are arranged alphabetically. Finally, the Method Index contains an alphabetical listing of every method in the Foundation framework and Application Kit. Each method name in the index has a list of classes that implement that method. Here's how to read a quick reference entry.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

## Description

Following the title of each quick-reference entry is a brief description of the class or protocol. Descriptions may be as short as a couple of lines, or as long as several paragraphs of text.

## Hierarchy

Every class in the quick reference has a figure illustrating the hierarchy of the class, and any protocols adopted by the class or its ancestors. In the hierarchy figure classes appear as rectangles containing the name of the class, and formal Objective-C protocols appear as rectangles with rounded corners. The root object of each hierarchy (either `NSObject` or `NSProxy`) is at the left of the figure, with subclasses extending horizontally to the right. Subclasses are connected by a solid line, which denotes an inheritance relationship. The protocols adopted by any class in the hierarchy appear vertically beneath the class. Note that the hierarchy only shows the superclasses of a class. Subclasses of the class, if any exist, are listed after the class synopsis in the "Subclasses" cross-reference.

## Synopsis

The synopsis is the most important part of the class reference, providing a list of the methods that are part of the class interface. Additionally, the class synopsis provides a list of methods that a delegate object might implement, as well as a list of notifications that the class can post. Each class synopsis begins with the class interface declaration as it would appear in the class header file. The interface declaration displays the class name, superclass name, and any protocols that the class adopts. For example, `NSDate` has the following interface declaration in its class synopsis:

```
@interface NSDate : NSObject <NSCoding, NSCopying>
```

Following the interface declaration is a list of methods that are a part of the class's interface. This includes all methods that may be declared in a category of a method. The class interface method list is ended with `@end` . Following the class method list is a list of methods a delegate object may implement, and a list of notifications that instances of the class may post to the notification center.

Protocol synopses take on two forms, depending on whether the protocol is formal or informal. *Formal protocols* enclose the method list as follows:

```
@protocol ProtocolName

// Methods

@end
```

While an *informal protocol* synopsis appears as a category interface declaration:

```
@interface NSObject (ProtocolName)
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Methods

@end
```

## Functional grouping of methods

Methods in the class synopsis are broken up into several optional categories, within which the methods are listed alphabetically. A class may have groups of convenience constructors, initializers, and property accessor methods, in addition to class and instance methods. Additionally, the synopsis lists methods a class expects its delegate to respond to, as well as notifications posted by instances of the class. Method groups are separated in the synopsis with C comments, such as `// Initializers` , `// Class Methods` , and `// Notifications` . Protocol synopses group methods either as instance or class methods. Not every class has methods that fall under each of these categorizes. The various categories are as follows (in the same order they would appear in the class synopsis):

*Convenience constructors*

Lists any convenience constructors of a class. Convenience constructors are class methods that combine object allocation and initialization into one step. By convention, objects returned by convenience constructor have already been sent an `autorelease` method, and will be released at the end of the event-loop. If you wish to use an object fo a longer period of time you must send a `retain` message to the returned object. Generally speaking, convenience constructors very nearly mirror the initializers of a class. A class may have other factory methods listed in the Class Methods grouping in addition to these convenience constructors.

*Initializers*

This grouping lists all of the initializers of a class, which is any method that begins with `init` . When instantiating an class with `alloc` , you must initialize the new object with one of the class's initializers before it is used. Objects created and initialized in this way have reference count of 1, unlike objects returned by convenience constructors, which have been autoreleased before they are returned.

*Accessor methods*

This section lists methods that are used to access the properties of a class. Any instance method that begins with `set...` is listed here; these are used to set the property indicated in the method name. Conventionally, methods used to access properties are named after the property. For example, `NSBezierPath` has the method `setLineWidth:` to set the line width of the path. The associated get-property instance method is `lineWidth` -the name of the property. Accessor methods are listed alphabetically by the property name, so that the "set" methods appear grouped with their respective property query methods.

*Class methods*

This section of the synopsis lists all class methods that are not constructors or accessor methods.

*Instance methods*

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

This section lists all instance methods that are not initializers or accessor methods.

*Implementing methods*

This section groups methods that implement the same protocol. For each protocol adopted by the class, there is one subgroup of methods.

*Delegate methods*

This section lists any methods a delegate of the class may optionally implement. Delegate methods are not part of the class interface; generally, they are declared as a category of the root class, `NSObject` .

*Notifications*

This section lists the symbolic names of any notification that the class may post during its lifetime.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 9. Foundation Types and Constants

This chapter describes the data types and constants found in the Foundation framework, and is divided into the following sections:

- Data types
- Enumerations
- Global variables
- Constants
- Exception names



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 9.1 Data Types

This section lists the data types defined by and used in the Foundation framework.

### *NSCalculationError*

```
typedef enum {
    NSCalculationNoError = 0,
    NSCalculationLossOfPrecision,
    NSCalculationUnderflow,
    NSCalculationOverflow,
    NSCalculationDivideByZero
} NSCalculationError;
```

### *NSComparisonResult*

```
typedef enum _NSComparisonResult {
    NSOrderedAscending = -1,
    NSOrderedSame,
    NSOrderedDescending
} NSComparisonResult;
```

### *NSDecimal*

```
typedef struct {
    signed int _exponent:8;
    unsigned int _length:4;
    unsigned int _isNegative:11;
    unsigned int _isCompact:1;
    unsigned int _reserved:18;
    unsigned short _mantissa[NSDecimalMaxSize];
} NSDecimal;
```

### *NSHashEnumerator*

```
typedef struct {
    unsigned _pi;
    unsigned _si void *_bs;
} NSHashEnumerator;
```

### *NSHashTable*

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
typedef struct _NSHashTable
NSHashTable;
```

*NSHashTableCallBacks*

```
typedef struct {
    unsigned (*hash)(NSHashTable *table, const void *);
    BOOL (*isEqual)(NSHashTable *table, const void *, const void *);
    void (*retain)(NSHashTable *table, const void *);
    void (*release)(NSHashTable *table, void *);
    NSString *(*describe)(NSHashTable *table, const void *);
} NSHashTableCallBacks;
```

*NSInsertionPosition*

```
typedef enum {
    NSPositionAfter,
    NSPositionBefore,
    NSPositionBeginning,
    NSPositionEnd,
    NSPositionReplace
} NSInsertionPosition;
```

*NSMapEnumerator*

```
typedef struct {
    unsigned _pi;
    unsigned _si;
    void *_bs;
} NSMapEnumerator;
```

*NSMapTable*

```
typedef struct _NSMapTable NSMapTable;
```

*NSMapTableKeyCallBacks*

```
typedef struct {
    unsigned (*hash)(NSMapTable *table, const void *);
    BOOL (*isEqual)(NSMapTable *table, const void *, const void *);
    void (*retain)(NSMapTable *table, const void *);
    void (*release)(NSMapTable *table, void *);
    NSString *(*describe)(NSMapTable *table, const void *);
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    const void *notAKeyMarker;
} NSMapTableKeyCallBacks;
```

### *NSMapTableValueCallBacks*

---

```
typedef struct {
    void (*retain)(NSMapTable *table, const void *);
    void (*release)(NSMapTable *table, void *);
    NSString *(*describe)(NSMapTable *table, const void *);
} NSMapTableValueCallBacks;
```

### *NSNetServicesError*

---

```
typedef enum {
     NSNetServicesUnknownError = -72000,
     NSNetServicesCollisionError = -72001,
     NSNetServicesNotFoundError = -72002,
     NSNetServicesActivityInProgress = -72003,
     NSNetServicesBadArgumentError = -72004,
     NSNetServicesCancelledError = -72005,
     NSNetServicesInvalidError = -72006
} NSNetServicesError;
```

### *NSNotificationCoalescing*

```
typedef enum {
     NSNotificationNoCoalescing = 0,
     NSNotificationCoalescingOnName = 1,
     NSNotificationCoalescingOnSender = 2
} NSNotificationCoalescing;
```

### *NSNotificationSuspensionBehavior*

```
typedef enum {
     NSNotificationSuspensionBehaviorDrop = 1,
     NSNotificationSuspensionBehaviorCoalesce = 2,
     NSNotificationSuspensionBehaviorHold = 3,
     NSNotificationSuspensionBehaviorDeliverImmediately = 4
} NSNotificationCoalescing;
```

### *NSObjCValue*

```
typedef struct {
    enum _NSObjCValueType type;
    union {
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
        char charValue;
        short shortValue;
        long longValue;
        long long longlongValue;
        float floatValue;
        double doubleValue;
        bool boolValue;
        SEL selectorValue;
        id objectValue;
        void *pointerValue;
        void *structLocation;
        char *cStringLocation;
    } value;
} NSObjCValue;
```

### *NSPoint*

---

```
typedef struct _NSPoint {
    float x;
    float y;
} NSPoint;
```

### *NSPointArray*

```
typedef NSPoint *NSPointArray;
```

### *NSPointPointer*

```
typedef NSPoint *NSPointPointer;
```

### *NSPostingStyle*

```
typedef enum {
    NSPostWhenIdle = 1,
    NSPostASAP = 2,
    NSPostNow = 3
} NSPostingStyle;
```

### *NSPropertyListFormat*

```
typedef enum {
    NSPropertyListOpenStepFormat = kCFPropertyListOpenStepFormat,
     NSPropertyListXMLFormat_v1_0 = kCFPropertyListXMLFormat_v1_0,
     NSPropertyListBinaryFormat_v1_0 = kCFPropertyListBinaryFormat_v1_0
} NSPropertyListFormat;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### *NSPropertyListMutabilityOptions*

```
typedef enum {
    NSPropertyListImmutable = kCFPropertyListImmutable,
    NSPropertyListMutableContainers = kCFPropertyListMutableContainers,
    NSPropertyListMutableContainersAndLeaves = kCFPropertyListMutableContainersAndLeaves
} NSPropertyListMutabilityOptions;
```

### *NSRange*

```
typedef struct _NSRange {
    unsigned int location;
    unsigned int length;
} NSRange;
```

### *NSRangePointer*

```
typedef NSRange *NSRangePointer;
```

### *NSRect*

```
typedef struct _NSRect {
    NSPoint origin;
    NSSize size;
} NSRect;
```

### *NSRectArray*

```
typedef NSRect *NSRectArray;
```

### *NSRectEdge*

```
typedef enum _NSRectEdge {
    NSMinXEdge = 0,
    NSMinYEdge = 1,
    NSMaxXEdge = 2,
    NSMaxYEdge = 3
} NSRectEdge;
```

### *NSRectPointer*

```
typedef NSRect *NSRectPointer;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### *NSRelativePosition*

```
typedef enum {
    NSRelativeAfter = 0,
    NSRelativeBefore
} NSRelativePosition;
```

### *NSRoundingMode*

```
typedef enum {
    NSRoundPlain,
    NSRoundDown,
    NSRoundUp,
    NSRoundBankers
} NSRoundingMode;
```

### *NSSaveOptions*

```
typedef enum {
    NSSaveOptionsYes = 0,
    NSSaveOptionsNo,
    NSSaveOptionsAsk,
} NSSaveOptions;
```

### *NSSearchPathDirectory*

```
typedef enum {
    NSApplicationDirectory = 1,
    NSDemoApplicationDirectory,
    NSDeveloperApplicationDirectory,
    NSAdminApplicationDirectory,
    NSLibraryDirectory,
    NSDeveloperDirectory,
    NSUserDirectory,
    NSDocumentationDirectory,
    NSDocumentDirectory,
    NSAllApplicationsDirectory = 100,
    NSAllLibrariesDirectory = 101
} NSSearchPathDirectory;
```

### *NSSearchPathDomainMask*

```
typedef enum {
    NSUserDomainMask = 1,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSLocalDomainMask = 2,
    NSNetworkDomainMask = 4,
    NSSystemDomainMask = 8,
    NSAllDomainsMask = 0x0ffff,
} NSSearchPathDomainMask;
```

*NSSize*

---

```
typedef struct _NSSize {
    float width;
    float height;
} NSSize;
```

*NSSizeArray*

---

```
typedef NSSize *NSSizeArray;
```

*NSSizePointer*

---

```
typedef NSSize *NSSizePointer;
```

*NSStringEncoding*

```
typedef unsigned NSStringEncoding;
```

*NSSwappedDouble*

```
typedef struct {
    unsigned long long v;
} NSSwappedDouble;
```

*NSSwappedFloat*

```
typedef struct {
    unsigned long v;
} NSSwappedFloat;
```

*NSTestComparisonOperation*

```
typedef enum {
    NSEqualToComparison = 0,
    NSLessThanOrEqualToComparison,
    NSLessThanComparison,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSGreaterThanOrEqualToComparison,
    NSGreaterThanComparison,
    NSBeginsWithComparison,
    NSEndsWithComparison,
    NSContainsComparison,
} NSTestComparisonOperation;
```

### *NSTimeInterval*

---

```
typedef double NSTimeInterval;
```

### *NSUncaughtExceptionHandler*

---

```
typedef volatile void NSUncaughtExceptionHandler( NSException *exception);
```

### *NSURLHandleStatus*

---

```
typedef enum {
     NSURLHandleNotLoaded = 0,
    NSURLHandleLoadSucceeded,
    NSURLHandleLoadInProgress,
    NSURLHandleLoadFailed
} NSURLHandleStatus;
```

### *NSWhoseSubelementIdentifier*

```
typedef enum {
     NSIndexSubelement = 0,
     NSEverySubelement = 1,
     NSMiddleSubelement = 2,
     NSRandomSubelement = 3,
    NSNoSubelement = 4
} NSWhoseSubelementIdentifier;
```

### *NSZone*

```
typedef struct _NSZone NSZone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 9.2 Enumerations

This section lists the enumeration constants defined by and used in the Foundation framework.

### *NSNotFound*

```
enum {
    NSNotFound = 0x7fffffff
};
```

### *NSOpenStepUnicodeReservedBase*

```
enum {
    NSOpenStepUnicodeReservedBase = 0xF400
};
```

### *NSProcessInfo (Operating Systems)*

```
enum {
    NSWindowsNTOperatingSystem = 1,
    NSWindows95OperatingSystem,
    NSSolarisOperatingSystem,
    NSHPUXOperatingSystem,
    NSMACHOperatingSystem,
    NSSunOSOperatingSystem,
    NSOSF1OperatingSystem
};
```

### *NSScriptCommand (General Command Execution Errors)*

```
enum {
    NSNoScriptError = 0,
    NSReceiverEvaluationScriptError,
    NSKeySpecifierEvaluationScriptError,
    NSArgumentEvaluationScriptError,
    NSReceiversCantHandleCommandScriptError,
    NSRequiredArgumentsMissingScriptError,
    NSArgumentsWrongScriptError,
    NSUnknownKeyScriptError,
    NSInternalScriptError,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSOperationNotSupportedForKeyScriptError,
    NSCannotCreateScriptCommandError
};
```

### NSScriptObjectSpecifier (Specifier Evaluation Errors)

```
enum {
    NSNoSpecifierError = 0,
    NSNoTopLevelContainersSpecifierError,
    NSContainerSpecifierError,
    NSUnknownKeySpecifierError,
    NSInvalidIndexSpecifierError,
    NSInternalSpecifierError,
    NSOperationNotSupportedForKeySpecifierError
};
```

### NSUndoCloseGroupingRunLoopOrdering

```
enum {
    NSUndoCloseGroupingRunLoopOrdering = 350000
};
```

### Search Types

```
enum {
    NSCaseInsensitiveSearch = 1,
    NSLiteralSearch = 2,
    NSBackwardsSearch = 4,
    NSAnchoredSearch = 8
};
```

### String Encodings

```
enum {
    NSASCIIStringEncoding = 1,
    NSNEXTSTEPStringEncoding = 2,
    NSJapaneseEUCStringEncoding = 3,
    NSUTF8StringEncoding = 4,
    NSISOLatin1StringEncoding = 5,
    NSSymbolStringEncoding = 6,
    NSNonLossyASCIIStringEncoding = 7,
    NSShiftJISStringEncoding = 8,
    NSISOLatin2StringEncoding = 9,
    NSUnicodeStringEncoding = 10,
    NSWindowsCP1251StringEncoding = 11,
    NSWindowsCP1252StringEncoding = 12,
    NSWindowsCP1253StringEncoding = 13,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSWindowsCP1254StringEncoding = 14,
    NSWindowsCP1250StringEncoding = 15,
    NSISO2022JPStringEncoding = 21,
    NSMacOSRomanStringEncoding = 30,
    NSProprietaryStringEncoding = 65536
};
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 9.3 Global Variables

This section lists the global variable defined by and used in the Foundation framework.

### *File Attribute Keys*

---

```
extern NSString *NSFileType;
extern NSString *NSFileSize;
extern NSString *NSFileModificationDate;
extern NSString *NSFileReferenceCount;
extern NSString *NSFileDeviceIdentifier;
extern NSString *NSFileOwnerAccountNumber;
extern NSString *NSFileGroupOwnerAccountNumber;
extern NSString *NSFilePosixPermissions;
extern NSString *NSFileSystemFileNumber;
extern NSString *NSFileExtensionHidden;
extern NSString *NSFileHFSCreatorCode;
extern NSString *NSFileHFSTypeCode;
extern NSString *NSFileImmutable;
extern NSString *NSFileAppendOnly;
extern NSString *NSFileCreationDate;
extern NSString *NSFileOwnerAccountID;
extern NSString *NSFileGroupOwnerAccountID;
```

### *Filesystem Attribute Keys*

```
extern NSString *NSFileSystemSize;
extern NSString *NSFileSystemFreeSize;
extern NSString *NSFileSystemNodes;
extern NSString *NSFileSystemFreeNodes;
extern NSString *NSFileSystemNumber;
```

### *File Type Attribute Keys*

```
extern NSString *NSFileTypeDirectory;
extern NSString *NSFileTypeRegular;
extern NSString *NSFileTypeSymbolicLink;
extern NSString *NSFileTypeSocket;
extern NSString *NSFileTypeCharacterSpecial;
extern NSString *NSFileTypeBlockSpecial;
extern NSString *NSFileTypeUnknown;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### Language-Dependent Date/Time Information

```
extern NSString *NSWeekDayNameArray;
extern NSString *NSShortWeekDayNameArray;
extern NSString *NSMonthNameArray;
extern NSString *NSShortMonthNameArray;
extern NSString *NSTimeFormatString;
extern NSString *NSDateFormatString;
extern NSString *NSTimeDateFormatString;
extern NSString *NSShortTimeDateFormatString;
extern NSString *NSAMPMDesignation;
extern NSString *NSHourNameDesignations;
extern NSString *NSYearMonthWeekDesignations;
extern NSString *NSEarlierTimeDesignations;
extern NSString *NSLaterTimeDesignations;
extern NSString *NSThisDayDesignations;
extern NSString *NSNextDayDesignations;
extern NSString *NSNextNextDayDesignations;
extern NSString *NSPriorDayDesignations;
extern NSString *NSDateTimeOrdering;
extern NSString *NSShortDateFormatString;
```

### Language-Dependent Numeric Information

```
extern NSString *NSCurrencySymbol;
extern NSString *NSDecimalSeparator;
extern NSString *NSThousandsSeparator;
extern NSString *NSInternationalCurrencyString;
extern NSString *NSPositiveCurrencyFormatString;
extern NSString *NSNegativeCurrencyFormatString;
extern NSString *NSDecimalDigits;
```

### NSAppleEvent Timeouts

```
extern const double NSAppleEventTimeOutDefault;
extern const double NSAppleEventTimeOutNone;
```

### NSConnectionReplyMode

```
extern NSString *NSConnectionReplyMode;
```

### NSDefaultRunLoopMode

```
extern NSString *NSDefaultRunLoopMode;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

## NSJavaSetup Information

```
extern NSString * const NSJavaClasses;
extern NSString * const NSJavaRoot;
extern NSString * const NSJavaPath;
extern NSString * const NSJavaUserPath;
extern NSString * const NSJavaLibraryPath;
extern NSString * const NSJavaOwnVirtualMachine;
extern NSString * const NSJavaPathSeparator;
```

## NSHashTable Callbacks

```
extern const NSHashTableCallBacks NSIntHashCallBacks;
extern const NSHashTableCallBacks NSNonOwnedPointerHashCallBacks;
extern const NSHashTableCallBacks NSNonRetainedObjectHashCallBacks;
extern const NSHashTableCallBacks NSObjectHashCallBacks;
extern const NSHashTableCallBacks NSOwnedObjectIdentityHashCallBacks;
extern const NSHashTableCallBacks NSOwnedPointerHashCallBacks;
extern const NSHashTableCallBacks NSPointerToStructHashCallBacks;
```

## NSLocalNotificationCenterType

```
extern NSString * const NSLocalNotificationCenterType;
```

## NSMapTable Key Call Backs

```
extern const NSMapTableKeyCallBacks NSIntMapKeyCallBacks;
extern const NSMapTableKeyCallBacks NSNonOwnedPointerMapKeyCallBacks;
extern const NSMapTableKeyCallBacks NSNonOwnedPointerOrNullMapKeyCallBacks;
extern const NSMapTableKeyCallBacks NSNonRetainedObjectMapKeyCallBacks;
extern const NSMapTableKeyCallBacks NSObjectMapKeyCallBacks;
extern const NSMapTableKeyCallBacks NSOwnedPointerMapKeyCallBacks;
```

## NSMapTable Value Callbacks

```
extern const NSMapTableValueCallBacks NSIntMapValueCallBacks;
extern const NSMapTableValueCallBacks NSNonOwnedPointerMapValueCallBacks;
extern const NSMapTableValueCallBacks NSObjectMapValueCallBacks;
extern const NSMapTableValueCallBacks NSNonRetainedObjectMapValueCallBacks;
extern const NSMapTableValueCallBacks NSOwnedPointerMapValueCallBacks;
```

## NSNetServices Errors

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
extern NSString *NSNetServicesErrorCode;
extern NSString *NSNetServicesErrorDomain;
```

### NSURL Schemes

---

```
extern NSString *NSURLFileScheme;
```

### NSURLHandle FTP Property Keys

---

```
extern NSString *NSFTPPropertyUserLoginKey;
extern NSString *NSFTPPropertyUserPasswordKey;
extern NSString *NSFTPPropertyActiveTransferModeKey;
extern NSString *NSFTPPropertyFileOffsetKey;
```

### NSURLHandle HTTP Property Keys

---

```
extern NSString *NSHTTPPropertyStatusCodeKey;
extern NSString *NSHTTPPropertyStatusReasonKey;
extern NSString *NSHTTPPropertyServerHTTPVersionKey;
extern NSString *NSHTTPPropertyRedirectionHeadersKey;
extern NSString *NSHTTPPropertyErrorPageDataKey;
extern NSString *NSHTTPPropertyHTTPProxy;
```

### NSUserDefaults Domains

```
extern NSString *NSGlobalDomain;
extern NSString *NSArgumentDomain;
extern NSString *NSRegistrationDomain;
```

### Zero Constants

```
extern const NSPoint NSZeroPoint;
extern const NSSize NSZeroSize;
extern const NSRect NSZeroRect;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## 9.4 Constants

This section lists the constant macros defined by and used in the Foundation framework.

### *NSDecimalMaxSize*

---

```
#define NSDecimalMaxSize (8)
```

### *NSDecimalNoScale*

---

```
#define NSDecimalNoScale SHRT_MAX
```

### *NSNotAnIntMapKey*

```
#define NSNotAnIntMapKey((const void *)0x80000000)
```

### *NSNotAPointerMapKey*

```
#define NSNotAPointerMapKey((const void *)0xffffffff)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 9.5 Exceptions

This section lists the names of exceptions raised by Foundation classes.

### *Archiving*

```
extern NSString *NSInconsistentArchiveException;
```

### *Connection*

```
extern NSString *NSFailedAuthenticationException;
```

### *General Foundation Exception Names*

```
extern NSString *NSGenericException;
extern NSString *NSRangeException;
extern NSString *NSInvalidArgumentException;
extern NSString *NSInternalInconsistencyException;
extern NSString *NSMallocException;
extern NSString *NSObjectInaccessibleException;
extern NSString *NSObjectNotAvailableException;
extern NSString *NSDestinationInvalidException;
extern NSString *NSPortTimeoutException;
extern NSString *NSInvalidSendPortException;
extern NSString *NSInvalidReceivePortException;
extern NSString *NSPortSendException;
extern NSString *NSPortReceiveException;
extern NSString *NSOldStyleException;
```

### *Keyed Archiving*

```
extern NSString *NSInvalidArchiveOperationException;
extern NSString *NSInvalidUnarchiveOperationException;
```

### *NSDecimalNumber*

```
extern NSString *NSDecimalNumberExactnessException;
extern NSString *NSDecimalNumberOverflowException;
extern NSString *NSDecimalNumberUnderflowException;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
extern NSString *NSDecimalNumberDivideByZeroException;
```

*NSFileHandle*

---

```
extern NSString *NSFileHandleOperationException;
```

*NSScriptKeyValueCoding*

---

```
extern NSString *NSOperationNotSupportedForKeyException;
```

*NSString Handling*

---

```
extern NSString *NSParseErrorException;
extern NSString *NSCharacterConversionException;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 10. Foundation Functions

This chapter lists the functions defined by the Foundation framework. The functions are grouped into the following categories:

- Assertions
- Bundles
- Byte ordering
- Decimals
- Java setup
- Hash tables
- HFS file types
- Map tables
- Object allocation
- Objective-C runtime
- Path utilities
- Points
- Ranges
- Rects
- Sizes
- Uncaught exceptions
- Zones



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.1 Assertions

The assertion macros are used within Objective-C methods or C functions to check a condition, and generate an assertion failure if the condition is false. The `NSAssert` macros are used within Objective-C methods, while the `NSCAssert` macros are used within C functions. The assertion macros work with a thread's assertion handler, which is an instance of the class `NSAssertionHandler`. When an assertion is generated the assertion handler will print an error message with the name of the method and class or function in which the assertion failure occurred. The description strings take `printf` style formatting.

`NSAssert`

```
NSAssert(condition, NSString *description)
```

`NSAssert1` through `NSAssert5`

```
NSAssert1(condition, NSString *description, arg1)

NSAssert2(condition, NSString *description, arg1, arg2)

NSAssert3(condition, NSString *description, arg1, arg2, arg3)

NSAssert4(condition, NSString *description, arg1, arg2, arg3, arg4)

NSAssert5(condition, NSString *description, arg1, arg2, arg3, arg4, arg5)
```

`NSCAssert`

```
NSCAssert(condition, NSString *description)
```

`NSCAssert1` through `NSCAssert5`

```
NSCAssert1(condition, NSString *description, arg1)

NSCAssert2(condition, NSString *description, arg1, arg2)

NSCAssert3(condition, NSString *description, arg1, arg2, arg3)

NSCAssert4(condition, NSString *description, arg1, arg2, arg3, arg4)

NSCAssert5(condition, NSString *description, arg1, arg2, arg3, arg4, arg5)
```

`NSCParameterAssert`

```
NSCParameterAssert(condition)
```

`NSParameterAssert`

```
NSParameterAssert(condition)
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 10.2 Bundles

The bundle functions are used to access localized string resources contained in an application bundle.

NSLocalizedString

```
NSString *NSLocalizedString(NSString *key, NSString *comment)
```

NSLocalizedStringFromTable

```
NSString *NSLocalizedStringFromTable(NSString *key, NSString *tableName, NSString
*comment)
```

NSLocalizedStringFromTableInBundle

```
NSString *NSLocalizedStringFromTableInBundle(NSString *key, NSString *tableName,
NSBundle *bundle, NSString *comment)
```

NSLocalizedStringWithDefaultValue

```
NSString NSLocalizedStringWithDefaultValue(NSString *key, NSString *tableName,
NSBundle *bundle, NSString *value, NSString *comment)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.3 Byte Ordering

The byte ordering functions are used to convert primitive data type values from big-endian to little-endian, and vice versa.

NSConvertHostDoubleToSwapped

```
NSSwappedDouble NSConvertHostDoubleToSwapped(double x)
```

NSConvertHostFloatToSwapped

```
NSSwappedFloat NSConvertHostFloatToSwapped(float x)
```

NSConvertSwappedDoubleToHost

```
double NSConvertSwappedDoubleToHost(NSSwappedDouble x)
```

NSConvertSwappedFloatToHost

```
float NSConvertSwappedFloatToHost(NSSwappedFloat x)
```

NSHostByteOrder

```
unsigned int NSHostByteOrder(void)
```

NSSwapBigDoubleToHost

```
double NSSwapBigDoubleToHost(NSSwappedDouble x)
```

NSSwapBigFloatToHost

```
float NSSwapBigFloatToHost(NSSwappedFloat x)
```

NSSwapBigIntToHost

```
unsigned int NSSwapBigIntToHost(unsigned int x)
```

NSSwapBigLongLongToHost

```
unsigned long long NSSwapBigLongLongToHost(unsigned long long x)
```

NSSwapBigLongToHost

```
unsigned long NSSwapBigLongToHost(unsigned long x)
```

NSSwapBigShortToHost

```
unsigned short NSSwapBigShortToHost(unsigned short x)
```

NSSwapDouble

```
NSSwappedDouble NSSwapDouble(NSSwappedDouble x)
```

NSSwapFloat

```
NSSwappedFloat NSSwapFloat(NSSwappedFloat x)
```

NSSwapHostDoubleToBig

```
NSSwappedDouble NSSwapHostDoubleToBig(double x)
```

NSSwapHostDoubleToLittle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSSwappedDouble NSSwapHostDoubleToLittle(double x)
NSSwapHostFloatToBig

NSSwappedFloat NSSwapHostFloatToBig(float x)
NSSwapHostFloatToLittle

NSSwappedFloat NSSwapHostFloatToLittle(float x)
NSSwapHostIntToBig

unsigned int NSSwapHostIntToBig(unsigned int x)
NSSwapHostIntToLittle

unsigned int NSSwapHostIntToLittle(unsigned int x)
NSSwapHostLongLongToBig

unsigned long long NSSwapHostLongLongToBig(unsigned long long x)
NSSwapHostLongLongToLittle

unsigned long long NSSwapHostLongLongToLittle(unsigned long long x)
NSSwapHostLongToBig

unsigned long NSSwapHostLongToBig(unsigned long x)
NSSwapHostLongToLittle

unsigned long NSSwapHostLongToLittle(unsigned long x)
NSSwapHostShortToBig

unsigned short NSSwapHostShortToBig(unsigned short x)
NSSwapHostShortToLittle

unsigned short NSSwapHostShortToLittle(unsigned short x)
NSSwapInt

unsigned int NSSwapInt (unsigned int inv)
NSSwapLittleDoubleToHost

double NSSwapLittleDoubleToHost(NSSwappedDouble x)
NSSwapLittleFloatToHost

float NSSwapLittleFloatToHost(NSSwappedFloat x)
NSSwapLittleIntToHost

unsigned int NSSwapLittleIntToHost(unsigned int x)
NSSwapLittleLongLongToHost

unsigned long long NSSwapLittleLongLongToHost(unsigned long long x)
NSSwapLittleLongToHost

unsigned long NSSwapLittleLongToHost(unsigned long x)
NSSwapLittleShortToHost

unsigned short NSSwapLittleShortToHost(unsigned short x)
NSSwapLong

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
unsigned long NSSwapLong(unsigned long inv)
```

NSSwapLongLong

```
unsigned long long NSSwapLongLong(unsigned long long inv)
```

NSSwapShort

```
unsigned short NSSwapShort (unsigned short inv)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.4 Decimals

These functions are used to perform decimal arithmetic with `NSDecimal` type `struct`s. The Foundation class `NSDecimalNumber` may also be used for decimal arithmetic.

`NSDecimalAdd`

```
NSCalculationError NSDecimalAdd(NSDecimal *result, const NSDecimal *leftOperand,
const NSDecimal *rightOperand, NSRoundingMode roundingMode)
```

`NSDecimalCompact`

```
void NSDecimalCompact(NSDecimal *number)
```

`NSDecimalCompare`

```
NSComparisonResult NSDecimalCompare(const NSDecimal *leftOperand, const NSDecimal
*rightOperand)
```

`NSDecimalCopy`

```
void NSDecimalCopy(NSDecimal *destination, const NSDecimal *source)
```

`NSDecimalDivide`

```
NSCalculationError NSDecimalDivide(NSDecimal *result, const NSDecimal
*leftOperand, const NSDecimal *rightOperand, NSRoundingMode roundingMode)
```

`NSDecimalMultiply`

```
NSCalculationError NSDecimalMultiply(NSDecimal *result, const NSDecimal
*leftOperand, const NSDecimal *rightOperand, NSRoundingMode roundingMode)
```

`NSDecimalMultiplyByPowerOf10`

```
NSCalculationError NSDecimalMultiplyByPowerOf10(NSDecimal *result, const
NSDecimal *number, short power, NSRoundingMode roundingMode)
```

`NSDecimalNormalize`

```
NSCalculationError NSDecimalNormalize(NSDecimal *number1, NSDecimal *number2,
NSRoundingMode roundingMode)
```

`NSDecimalPower`

```
NSCalculationError NSDecimalPower(NSDecimal *result, const NSDecimal *number,
unsigned power, NSRoundingMode roundingMode)
```

`NSDecimalRound`

```
void NSDecimalRound(NSDecimal *result, const NSDecimal *number, int scale,
NSRoundingMode roundingMode)
```

`NSDecimalString`

```
NSString *NSDecimalString(const NSDecimal *dcm, NSDictionary *locale)
```

`NSDecimalSubtract`

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSCalculationError NSDecimalSubtract(NSDecimal *result, const NSDecimal
*leftOperand, const NSDecimal *rightOperand, NSRoundingMode roundingMode)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.5 Java Setup

These functions are used to interact with a Java Virtual Machine, Java classes, and the Java-to-Objective-C bridge.

NSJavaBundleCleanup

```
void NSJavaBundleCleanup(NSBundle *bundle, NSDictionary *plist)
```

NSJavaBundleSetup

```
id NSJavaBundleSetup(NSBundle *bundle, NSDictionary *plist)
```

NSJavaClassesForBundle

```
NSArray *NSJavaClassesForBundle(NSBundle *bundle, BOOL usesyscl, id *vm)
```

NSJavaClassesFromPath

```
NSArray *NSJavaClassesFromPath(NSArray *path, NSArray *wanted, BOOL usesyscl, id
*vm)
```

NSJavaNeedsToLoadClasses

```
BOOL NSJavaNeedsToLoadClasses(NSDictionary *plist)
```

NSJavaNeedsVirtualMachine

```
BOOL NSJavaNeedsVirtualMachine(NSDictionary *plist)
```

NSJavaObjectNamedInPath

```
id NSJavaObjectNamedInPath(NSString *name, NSArray *path)
```

NSJavaProvidesClasses

```
BOOL NSJavaProvidesClasses(NSDictionary *plist)
```

NSJavaSetup

```
id NSJavaSetup(NSDictionary *plist)
```

NSJavaSetupVirtualMachine

```
id NSJavaSetupVirtualMachine(void)
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.6 Hash Tables

These functions are used to create and manipulate hash tables, which are `struct`s of type `NSHashTable`.

`NSAllHashTableObjects`

```
NSArray *NSAllHashTableObjects(NSHashTable *table)
```

`NSCompareHashTables`

```
BOOL NSCompareHashTables(NSHashTable *table1, NSHashTable *table2)
```

`NSCopyHashTableWithZone`

```
NSHashTable *NSCopyHashTableWithZone(NSHashTable *table, NSZone *zone)
```

`NSCountHashTable`

```
unsigned NSCountHashTable(NSHashTable *table)
```

`NSCreateHashTable`

```
NSHashTable *NSCreateHashTable(NSHashTableCallBacks callBacks, unsigned capacity)
```

`NSCreateHashTableWithZone`

```
NSHashTable *NSCreateHashTableWithZone(NSHashTableCallBacks callBacks, unsigned
capacity, NSZone *zone)
```

`NSEndHashTableEnumeration`

```
void NSEndHashTableEnumeration(NSHashEnumerator *enumerator)
```

`NSEnumerateHashTable`

```
NSHashEnumerator NSEnumerateHashTable(NSHashTable *table)
```

`NSFreeHashTable`

```
void NSFreeHashTable(NSHashTable *table)
```

`NSHashGet`

```
void *NSHashGet(NSHashTable *table, const void *pointer)
```

`NSHashInsert`

```
void NSHashInsert(NSHashTable *table, const void *pointer)
```

`NSHashInsertIfAbsent`

```
void *NSHashInsertIfAbsent(NSHashTable *table, const void *pointer)
```

`NSHashInsertKnownAbsent`

```
void NSHashInsertKnownAbsent(NSHashTable *table, const void *pointer)
```

`NSHashRemove`

```
void NSHashRemove(NSHashTable *table, const void *pointer)
```

`NSNextHashEnumeratorItem`

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
void *NSNextHashEnumeratorItem(NSHashEnumerator *enumerator)
```

NSResetHashTable

```
void NSResetHashTable(NSHashTable *table)
```

NSStringFromHashTable

```
NSString *NSStringFromHashTable(NSHashTable *table)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.7 HFS File Types

These functions are used to determine the HFS file type of a file, as well as to convert between HFS file types and HFS file codes.

NSFileTypeForHFSTypeCode

```
NSString *NSFileTypeForHFSTypeCode(OSType hfsFileTypeCode)
```

NSHFSTypeCodeFromFileType

```
OSType NSHFSTypeCodeFromFileType(NSString *fileTypeString)
```

NSHFSTypeOfFile

```
NSString *NSHFSTypeOfFile(NSString *fullFilePath)
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.8 Map Tables

These functions are used to create and manipulate map tables, which are `struct`s of type `NSMapTable`.

`NSAllMapTableKeys`

```
NSArray *NSAllMapTableKeys(NSMapTable *table)
```

`NSAllMapTableValues`

```
NSArray *NSAllMapTableValues(NSMapTable *table)
```

`NSCompareMapTables`

```
BOOL NSCompareMapTables(NSMapTable *table1, NSMapTable *table2)
```

`NSCopyMapTableWithZone`

```
NSMapTable *NSCopyMapTableWithZone(NSMapTable *table, NSZone *zone)
```

`NSCountMapTable`

```
unsigned NSCountMapTable(NSMapTable *table)
```

`NSCreateMapTable`

```
NSMapTable *NSCreateMapTable(NSMapTableKeyCallBacks keyCallBacks, NSMap-
TableValueCallBacks valueCallBacks, unsigned capacity)
```

`NSCreateMapTableWithZone`

```
NSMapTable *NSCreateMapTableWithZone(NSMapTableKeyCallBacks keyCallBacks,
NSMapTableValueCallBacks valueCallBacks, unsigned capacity, NSZone *zone)
```

`NSEndMapTableEnumeration`

```
void NSEndMapTableEnumeration(NSMapEnumerator *enumerator)
```

`NSEnumerateMapTable`

```
NSMapEnumerator NSEnumerateMapTable(NSMapTable *table)
```

`NSFreeMapTable`

```
void NSFreeMapTable(NSMapTable *table)
```

`NSMapGet`

```
void *NSMapGet(NSMapTable *table, const void *key)
```

`NSMapInsert`

```
void NSMapInsert(NSMapTable *table, const void *key, const void *value)
```

`NSMapInsertIfAbsent`

```
void *NSMapInsertIfAbsent(NSMapTable *table, const void *key, const void *value)
```

`NSMapInsertKnownAbsent`

```
void NSMapInsertKnownAbsent(NSMapTable *table, const void *key, const void *value)
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSMapMember

```
BOOL NSMapMember(NSMapTable *table, const void *key, void **originalKey, void
**value)
```

NSMapRemove

```
void NSMapRemove(NSMapTable *table, const void *key)
```

NSNextMapEnumeratorPair

```
BOOL NSNextMapEnumeratorPair(NSMapEnumerator *enumerator, void **key, void **value)
```

NSResetMapTable

```
void NSResetMapTable(NSMapTable *table)
```

NSStringFromMapTable

```
NSString *NSStringFromMapTable(NSMapTable *table)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 10.9 Object Allocation

These functions may be used to create and destroy Objective-C objects, as well as to manage the reference counts of objects.

NSAllocateObject

```
id NSAllocateObject(Class aClass, unsigned extraBytes, NSZone *zone)
```

NSCopyObject

```
id NSCopyObject(id object, unsigned extraBytes, NSZone *zone)
```

NSDeallocateObject

```
void NSDeallocateObject(id object)
```

NSDecrementExtraRefCountWasZero

```
BOOL NSDecrementExtraRefCountWasZero(id object)
```

NSExtraRefCount

```
unsigned NSExtraRefCount(id object)
```

NSIncrementExtraRefCount

```
void NSIncrementExtraRefCount(id object)
```

NSShouldRetainWithZone

```
BOOL NSShouldRetainWithZone(id anObject, NSZone *requestedZone)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.10 Objective-C Runtime

These functions are used to obtain Objective-C runtime data types such as selectors and class objects. NSLog and NSLogv are used to print information to the standard output of an application.

NSClassFromString

```
Class NSClassFromString(NSString *aClassName)
```

NSGetSizeAndAlignment

```
const char *NSGetSizeAndAlignment(const char *typePtr, unsigned int *sizep, unsigned int *alignp)
```

NSLog

```
void NSLog(NSString *format, ...)
```

NSLogv

```
void NSLogv(NSString *format, va_list args)
```

NSSelectorFromString

```
SEL NSSelectorFromString(NSString *aSelectorName)
```

NSStringFromClass

```
NSString *NSStringFromClass(Class aClass)
```

NSStringFromSelector

```
NSString *NSStringFromSelector(SEL aSelector)
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.11 Path Utilities

These functions are used to get filesystem paths to common files and directories such as the current user's home directory. `NSFullUserName` is used to obtain the long username of the current username, while `NSUserName` returns a user's short username.

`NSFullUserName`

```
NSString *NSFullUserName(void)
```

`NSHomeDirectory`

```
NSString *NSHomeDirectory(void)
```

`NSHomeDirectoryForUser`

```
NSString *NSHomeDirectoryForUser(NSString *userName)
```

`NSOpenStepRootDirectory`

```
NSString *NSOpenStepRootDirectory(void)
```

`NSSearchPathForDirectoriesInDomains`

```
NSArray *NSSearchPathForDirectoriesInDomains(NSSearchPathDirectory directory,
NSSearchPathDomainMask domainMask, BOOL expandTilde)
```

`NSTemporaryDirectory`

```
NSString *NSTemporaryDirectory(void)
```

`NSUserName`

```
NSString *NSUserName(void)
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 10.12 Points

These functions are used to create and manipulate `NSPoint` structures.

`NSEqualPoints`

```
BOOL NSEqualPoints(NSPoint aPoint, NSPoint bPoint)
```

`NSMakePoint`

```
NSPoint NSMakePoint(float x, float y)
```

`NSPointFromString`

```
NSPoint NSPointFromString(NSString *aString)
```

`NSStringFromPoint`

```
NSString *NSStringFromPoint(NSPoint aPoint)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 10.13 Ranges

These functions are used to create and manipulate `NSRange` structures.

`NSEqualRanges`

```
BOOL NSEqualRanges(NSRange range1, NSRange range2)
```

`NSIntersectionRange`

```
NSRange NSIntersectionRange(NSRange range1, NSRange range2)
```

`NSLocationInRange`

```
BOOL NSLocationInRange(unsigned int index, NSRange aRange)
```

`NSMakeRange`

```
NSRange NSMakeRange(unsigned int location, unsigned int length)
```

`NSMaxRange`

```
unsigned int NSMaxRange(NSRange range)
```

`NSRangeFromString`

```
NSRange NSRangeFromString(NSString *aString)
```

`NSStringFromRange`

```
NSString *NSStringFromRange(NSRange range)
```

`NSUnionRange`

```
NSRange NSUnionRange(NSRange range1, NSRange range2)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.14 Rects

These functions are used to create and manipulate `NSRect` structures.

`NSContainsRect`

```
BOOL NSContainsRect(NSRect aRect, NSRect bRect)
```

`NSDivideRect`

```
void NSDivideRect(NSRect inRect, NSRect *slice, NSRect *rem, float amount, NSRectEdge
edge)
```

`NSEqualRects`

```
BOOL NSEqualRects(NSRect aRect, NSRect bRect)
```

`NSHeight`

```
float NSHeight(NSRect aRect)
```

`NSInsetRect`

```
NSRect NSInsetRect(NSRect aRect, float dX, float dY)
```

`NSIntegralRect`

```
NSRect NSIntegralRect(NSRect aRect)
```

`NSIntersectionRect`

```
NSRect NSIntersectionRect(NSRect aRect, NSRect bRect)
```

`NSIntersectsRect`

```
BOOL NSIntersectsRect(NSRect aRect, NSRect bRect)
```

`NSIsEmptyRect`

```
BOOL NSIsEmptyRect(NSRect aRect)
```

`NSMakeRect`

```
NSRect NSMakeRect(float x, float y, float w, float h)
```

`NSMaxX`

```
float NSMaxX(NSRect aRect)
```

`NSMaxY`

```
float NSMaxY(NSRect aRect)
```

`NSMidX`

```
float NSMidX(NSRect aRect)
```

`NSMidY`

```
float NSMidY(NSRect aRect)
```

`NSMinX`

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
float NSMinX(NSRect aRect)
```

NSMinY

```
float NSMinY(NSRect aRect)
```

NSMouseInRect

```
BOOL NSMouseInRect(NSPoint aPoint, NSRect aRect, BOOL isFlipped)
```

NSOffsetRect

```
NSRect NSOffsetRect(NSRect aRect, float dX, float dY)
```

NSPointInRect

```
BOOL NSPointInRect(NSPoint aPoint, NSRect aRect)
```

NSRectFromString

```
NSRect NSRectFromString(NSString *aString)
```

NSStringFromRect

```
NSString *NSStringFromRect(NSRect aRect)
```

NSUnionRect

```
NSRect NSUnionRect(NSRect aRect, NSRect bRect)
```

NSWidth

```
float NSWidth(NSRect aRect)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 10.15 Sizes

These functions are used to create and manipulate `NSSize` structures.

`NSEqualSizes`

```
BOOL NSEqualSizes(NSSize aSize, NSSize bSize)
```

`NSMakeSize`

```
NSSize NSMakeSize(float width, float height)
```

`NSSizeFromString`

```
NSSize NSSizeFromString(NSString *aString)
```

`NSStringFromSize`

```
NSString *NSStringFromSize(NSSize aSize)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 10.16 Uncaught Exceptions

These two functions are used to get and set the function that an application uses to handleuncaught exceptions.

```
NSGetUncaughtExceptionHandler

     NSUncaughtExceptionHandler *NSGetUncaughtExceptionHandler(void)
NSSetUncaughtExceptionHandler

     void NSSetUncaughtExceptionHandler(NSUncaughtExceptionHandler *)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 10.17 Zones

These functions are used to manipulate memory zones, represented by the data type `NSZone`.

`NSAllocateMemoryPages`

```
void *NSAllocateMemoryPages(unsigned bytes)
```

`NSCopyMemoryPages`

```
void NSCopyMemoryPages(const void *source, void *dest, unsigned bytes)
```

`NSCreateZone`

```
NSZone *NSCreateZone(unsigned startSize, unsigned granularity, BOOL canFree)
```

`NSDeallocateMemoryPages`

```
void NSDeallocateMemoryPages(void *ptr, unsigned bytes)
```

`NSDefaultMallocZone`

```
NSZone *NSDefaultMallocZone(void)
```

`NSLogPageSize`

```
unsigned NSLogPageSize(void)
```

`NSPageSize`

```
unsigned NSPageSize(void)
```

`NSRealMemoryAvailable`

```
unsigned NSRealMemoryAvailable(void)
```

`NSRecycleZone`

```
void NSRecycleZone(NSZone *zone)
```

`NSReturnAddress`

```
void *NSReturnAddress(unsigned frame)
```

`NSRoundDownToMultipleOfPageSize`

```
unsigned NSRoundDownToMultipleOfPageSize(unsigned bytes)
```

`NSRoundUpToMultipleOfPageSize`

```
unsigned NSRoundUpToMultipleOfPageSize(unsigned bytes)
```

`NSSetZoneName`

```
void NSSetZoneName(NSZone *zone, NSString *name)
```

`NSZoneCalloc`

```
void *NSZoneCalloc(NSZone *zone, unsigned numElems, unsigned byteSize)
```

`NSZoneFree`

```
void NSZoneFree(NSZone *zone, void *ptr)
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSZoneFromPointer

```
NSZone *NSZoneFromPointer(void *ptr)
```

NSZoneMalloc

```
void *NSZoneMalloc(NSZone *zone, unsigned size)
```

NSZoneName

```
NSString *NSZoneName(NSZone *zone)
```

NSZoneRealloc

```
void *NSZoneRealloc(NSZone *zone, void *ptr, unsigned size)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 11. Application Kit Types and Constants

This chapter describes the data types and constants found in the Foundation framework, and is divided into the following sections:

- Data types
- Enumerations
- Global variables
- Exception names



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 11.1 Data Types

This section lists the data types defined by and used in theApplication Kit.

### *NSAffineTransformStruct*

---

```
typedef struct _NSAffineTransformStruct {
    float m11, m12, m21, m22;
    float tX, tY;
} NSAffineTransformStruct;
```

### *NSApplicationTerminateReply*

---

```
typedef enum NSApplicationTerminateReply {
    NSTerminateCancel = 0,
    NSTerminateNow = 1,
    NSTerminateLater = 2
} NSApplicationTerminateReply;
```

### *NSBackingStoreType*

```
typedef enum _NSBackingStoreType {
    NSBackingStoreRetained = 0,
    NSBackingStoreNonretained = 1,
    NSBackingStoreBuffered = 2
} NSBackingStoreType;
```

### *NSBezelStyle*

```
typedef enum _NSBezelStyle {
    NSRoundedBezelStyle = 1,
    NSRegularSquareBezelStyle = 2,
    NSThickSquareBezelStyle = 3,
    NSThickerSquareBezelStyle = 4,
    NSShadowlessSquareBezelStyle = 6,
    NSCircularBezelStyle = 7
} NSBezelStyle;
```

### *NSBezierPathElement*

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
typedef enum {
    NSMoveToBezierPathElement,
    NSLineToBezierPathElement,
    NSCurveToBezierPathElement,
    NSClosePathBezierPathElement
} NSBezierPathElement;
```

### *NSBitmapImageFileType*

---

```
typedef enum _NSBitmapImageFileType {
    NSTIFFFileType,
    NSBMPFileType,
    NSGIFFileType,
    NSJPEGFileType,
    NSPNGFileType
} NSBitmapImageFileType;
```

### *NSBorderType*

```
typedef enum _NSBorderType {
    NSNoBorder = 0,
    NSLineBorder = 1,
    NSBezelBorder = 2,
    NSGrooveBorder = 3
} NSBorderType;
```

### *NSBoxType*

```
typedef enum {
    NSBoxPrimary = 0,
    NSBoxSecondary = 1,
     NSBoxSeparator =2,
     NSBoxOldStyle =3
}NSBoxType;
```

### *NSButtonType*

```
typedef enum _NSButtonType {
     NSMomentaryLightButton = 0,
     NSPushOnPushOffButton = 1,
    NSToggleButton = 2,
    NSSwitchButton = 3,
    NSRadioButton = 4,
     NSMomentaryChangeButton = 5,
    NSOnOffButton = 6,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSMomentaryPushInButton = 7
} NSButtonType;
```

### *NSCellAttribute*

---

```
typedef enum _NSCellAttribute {
    NSCellDisabled = 0,
    NSCellState = 1,
    NSPushInCell = 2,
    NSCellEditable = 3,
    NSChangeGrayCell = 4,
    NSCellHighlighted = 5,
    NSCellLightsByContents = 6,
    NSCellLightsByGray = 7,
    NSChangeBackgroundCell = 8,
    NSCellLightsByBackground = 9,
    NSCellIsBordered = 10,
    NSCellHasOverlappingImage = 11,
    NSCellHasImageHorizontal = 12,
    NSCellHasImageOnLeftOrBottom = 13,
    NSCellChangesContents = 14,
    NSCellIsInsetButton = 15,
    NSCellAllowsMixedState= 16
} NSCellAttribute;
```

### *NSCellImagePosition*

```
typedef enum _NSCellImagePosition {
    NSNoImage = 0,
    NSImageOnly = 1,
    NSImageLeft = 2,
    NSImageRight = 3,
    NSImageBelow = 4,
    NSImageAbove = 5,
    NSImageOverlaps = 6
} NSCellImagePosition;
```

### *NSCellState*

```
typedef enum _NSCellState {
    NSMixedState = -1,
    NSOffState = 0,
    NSOnState = 1
} NSCellStateValue;
```

### *NSCellType*

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
typedef enum _NSCellType {
    NSNullCellType = 0,
    NSTextCellType = 1,
    NSImageCellType = 2
} NSCellType;
```

### *NSCharacterCollection*

---

```
typedef enum {
     NSIdentityMappingCharacterCollection = 0,
     NSAdobeCNS1CharacterCollection = 1,
     NSAdobeGB1CharacterCollection = 2,
     NSAdobeJapan1CharacterCollection = 3,
     NSAdobeJapan2CharacterCollection = 4,
     NSAdobeKorea1CharacterCollection = 5,
} NSCharacterCollection;
```

### *NSCompositingOperation*

---

```
typedef enum _NSCompositingOperation {
     NSCompositeClear = 0,
     NSCompositeCopy = 1,
     NSCompositeSourceOver = 2,
     NSCompositeSourceIn = 3,
     NSCompositeSourceOut = 4,
     NSCompositeSourceAtop = 5,
     NSCompositeDestinationOver = 6,
     NSCompositeDestinationIn = 7,
     NSCompositeDestinationOut = 8,
     NSCompositeDestinationAtop = 9,
     NSCompositeXOR = 10,
     NSCompositePlusDarker = 11,
     NSCompositeHighlight = 12,
     NSCompositePlusLighter = 13
} NSCompositingOperation;
```

### *NSControlSize*

```
typedef enum _NSControlSize {
    NSRegularControlSize,
    NSSmallControlSize
} NSControlSize;
```

### *NSControlTint*

```
typedef enum _NSControlTint {
     NSDefaultControlTint = 0,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSClearControlTint = 7
} NSControlTint;
```

### *NSDocumentChangeType*

---

```
typedef enum _NSDocumentChangeType {
    NSChangeDone = 0,
    NSChangeUndone = 1,
    NSChangeCleared = 2
} NSDocumentChangeType;
```

### *NSDragOperation*

---

```
typedef unsigned int NSDragOperation;
```

### *NSDrawerState*

---

```
typedef enum _NSDrawerState {
    NSDrawerClosedState = 0,
    NSDrawerOpeningState = 1,
    NSDrawerOpenState = 2,
    NSDrawerClosingState = 3
} NSDrawerState;
```

### *NSEventType*

```
typedef enum _NSEventType {
    NSLeftMouseDown = 1,
    NSLeftMouseUp = 2,
    NSRightMouseDown = 3,
    NSRightMouseUp = 4,
    NSMouseMoved = 5,
    NSLeftMouseDragged = 6,
    NSRightMouseDragged = 7,
    NSMouseEntered = 8,
    NSMouseExited = 9,
    NSKeyDown = 10,
    NSKeyUp = 11,
    NSFlagsChanged = 12,
    NSAppKitDefined = 13,
    NSSystemDefined = 14,
    NSApplicationDefined = 15,
    NSPeriodic = 16,
    NSCursorUpdate = 17,
    NSScrollWheel = 22,
    NSOtherMouseDown = 25,
    NSOtherMouseUp = 26,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSOtherMouseDragged = 27
} NSEventType;
```

### *NSFocusRingPlacement*

---

```
typedef enum {
    NSFocusRingOnly = 0,
    NSFocusRingBelow = 1,
    NSFocusRingAbove = 2
} NSFocusRingPlacement;
```

### *NSFontAction*

---

```
typedef enum _NSFontAction {
    NSNoFontChangeAction = 0,
    NSViaPanelFontAction = 1,
    NSAddTraitFontAction = 2,
    NSSizeUpFontAction = 3,
    NSSizeDownFontAction = 4,
    NSHeavierFontAction = 5,
    NSLighterFontAction = 6,
    NSRemoveTraitFontAction = 7
} NSFontAction;
```

### *NSFontTraitMask*

```
typedef unsigned int NSFontTraitMask;
```

### *NSGlyph*

```
typedef unsigned int NSGlyph;
```

### *NSGlyphInscription*

```
typedef enum {
    NSGlyphInscribeBase = 0,
    NSGlyphInscribeBelow = 1,
    NSGlyphInscribeAbove = 2,
    NSGlyphInscribeOverstrike = 3,
    NSGlyphInscribeOverBelow = 4
} NSGlyphInscription;
```

### *NSGlyphLayoutMode*

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
typedef enum _NSGlyphLayoutMode {
    NSGlyphLayoutAtAPoint = 0,
    NSGlyphLayoutAgainstAPoint,
    NSGlyphLayoutWithPrevious
} NSGlyphLayoutMode;
```

### *NSGlyphRelation*

---

```
typedef enum _NSGlyphRelation {
    NSGlyphBelow = 1,
    NSGlyphAbove = 2
} NSGlyphRelation;
```

### *NSGradientType*

---

```
typedef enum _NSGradientType {
    NSGradientNone = 0,
    NSGradientConcaveWeak = 1,
    NSGradientConcaveStrong = 2,
    NSGradientConvexWeak = 3,
    NSGradientConvexStrong = 4
} NSGradientType;
```

### *NSImageAlignment*

```
typedef enum {
    NSImageAlignCenter = 0,
    NSImageAlignTop,
    NSImageAlignTopLeft,
    NSImageAlignTopRight,
    NSImageAlignLeft,
    NSImageAlignBottom,
    NSImageAlignBottomLeft,
    NSImageAlignBottomRight,
    NSImageAlignRight
} NSImageAlignment;
```

### *NSImageCacheMode*

```
typedef enum {
    NSImageCacheDefault,
    NSImageCacheAlways,
    NSImageCacheBySize,
    NSImageCacheNever
} NSImageCacheMode;
```

### *NSImageFrameStyle*

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
typedef enum {
    NSImageFrameNone = 0,
    NSImageFramePhoto,
    NSImageFrameGrayBezel,
    NSImageFrameGroove,
    NSImageFrameButton
} NSImageFrameStyle;
```

### *NSImageInterpolation*

```
typedef enum {
    NSImageInterpolationDefault,
    NSImageInterpolationNone,
    NSImageInterpolationLow,
    NSImageInterpolationHigh
} NSImageInterpolation;
```

### *NSImageLoadStatus*

```
typedef enum {
    NSImageLoadStatusCompleted,
    NSImageLoadStatusCancelled,
    NSImageLoadStatusInvalidData,
    NSImageLoadStatusUnexpectedEOF,
    NSImageLoadStatusReadError
} NSImageLoadStatus;
```

### *NSImageRepLoadStatus*

```
typedef enum {
    NSImageRepLoadStatusUnknownType = -1,
    NSImageRepLoadStatusReadingHeader = -2,
    NSImageRepLoadStatusWillNeedAllData = -3,
    NSImageRepLoadStatusInvalidData = -4,
    NSImageRepLoadStatusUnexpectedEOF = -5,
    NSImageRepLoadStatusCompleted = -6
} NSImageRepLoadStatus;
```

### *NSImageScaling*

```
typedef enum {
    NSScaleProportionally = 0,
    NSScaleToFit,
    NSScaleNone
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
} NSImageScaling;
```

### *NSInterfaceStyle*

---

```
typedef enum {
    NSNoInterfaceStyle = 0,
    NSNextStepInterfaceStyle = 1,
    NSWindows95InterfaceStyle = 2,
    NSMacintoshInterfaceStyle = 3
} NSInterfaceStyle;
```

### *NSLayoutDirection*

---

```
typedef enum _NSLayoutDirection {
    NSLayoutLeftToRight = 0,
    NSLayoutRightToLeft
} NSLayoutDirection;
```

### *NSLayoutStatus*

```
typedef enum _NSLayoutStatus {
    NSLayoutNotDone = 0,
    NSLayoutDone,
    NSLayoutCantFit,
    NSLayoutOutOfGlyphs
} NSLayoutStatus;
```

### *NSLineBreakMode*

```
typedef enum _NSLineBreakMode {
    NSLineBreakByWordWrapping = 0,
    NSLineBreakByCharWrapping,
    NSLineBreakByClipping,
    NSLineBreakByTruncatingHead,
    NSLineBreakByTruncatingTail,
    NSLineBreakByTruncatingMiddle
} NSLineBreakMode;
```

### *NSLineCapStyle*

```
typedef enum {
    NSButtLineCapStyle = 0,
    NSRoundLineCapStyle = 1,
    NSSquareLineCapStyle = 2
} NSLineCapStyle;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

## NSLineJoinStyle

```
typedef enum {
    NSMiterLineJoinStyle = 0,
    NSRoundLineJoinStyle = 1,
    NSBevelLineJoinStyle = 2
} NSLineJoinStyle;
```

## NSLineMovementDirection

```
typedef enum {
    NSLineDoesntMove = 0,
    NSLineMovesLeft = 1,
    NSLineMovesRight = 2,
    NSLineMovesDown = 3,
    NSLineMovesUp = 4
} NSLineMovementDirection;
```

## NSLineSweepDirection

```
typedef enum {
    NSLineSweepLeft = 0,
    NSLineSweepRight = 1,
    NSLineSweepDown = 2,
    NSLineSweepUp = 3
} NSLineSweepDirection;
```

## NSMatrixMode

```
typedef enum _NSMatrixMode {
    NSRadioModeMatrix = 0,
    NSHighlightModeMatrix = 1,
    NSListModeMatrix = 2,
    NSTrackModeMatrix =3
} NSMatrixMode;
```

## NSModalSession

```
typedef struct _NSModalSession *NSModalSession;
```

## NSMultibyteGlyphPacking

```
typedef enum _NSMultibyteGlyphPacking {
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSOneByteGlyphPacking,
    NSJapaneseEUCGlyphPacking,
    NSAsciiWithDoubleByteEUCGlyphPacking,
    NSTwoByteGlyphPacking,
    NSFourByteGlyphPacking,
    NSNativeShortGlyphPacking
} NSMultibyteGlyphPacking;
```

### *NSOpenGLContextAuxiliary*

---

```
typedef struct _CGLContextObject NSOpenGLContextAuxiliary;
```

### *NSOpenGLContextParameter*

---

```
typedef enum {
     NSOpenGLCPSwapRectangle = 200,
     NSOpenGLCPSwapRectangleEnable = 201,
     NSOpenGLCPRasterizationEnable = 221,
     NSOpenGLCPSwapInterval = 222,
     NSOpenGLCPSurfaceOrder = 235,
     NSOpenGLCPSurfaceOpacity = 236,
     NSOpenGLCPStateValidation = 301
} NSOpenGLContextParameter;
```

### *NSOpenGLGlobalOption*

```
typedef enum {
     NSOpenGLGOFormatCacheSize = 501,
     NSOpenGLGOClearFormatCache = 502,
     NSOpenGLGORetainRenderers = 503,
     NSOpenGLGOResetLibrary = 504
} NSOpenGLGlobalOption;
```

### *NSOpenGLPixelFormatAttribute*

```
typedef enum {
     NSOpenGLPFAAllRenderers = 1,
     NSOpenGLPFADoubleBuffer = 5,
     NSOpenGLPFAStereo = 6,
     NSOpenGLPFAAuxBuffers = 7,
     NSOpenGLPFAColorSize = 8,
     NSOpenGLPFAAlphaSize = 11,
     NSOpenGLPFADepthSize = 12,
     NSOpenGLPFAStencilSize = 13,
     NSOpenGLPFAAccumSize = 14,
     NSOpenGLPFAMinimumPolicy = 51,
     NSOpenGLPFAMaximumPolicy = 52,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSOpenGLPFAOffScreen = 53,
    NSOpenGLPFAFullScreen = 54,
    NSOpenGLPFASampleBuffers = 55,
    NSOpenGLPFASamples = 56,
    NSOpenGLPFAAuxDepthStencil = 57,
    NSOpenGLPFARendererID = 70,
    NSOpenGLPFASingleRenderer = 71,
    NSOpenGLPFANoRecovery = 72,
    NSOpenGLPFAAccelerated = 73,
    NSOpenGLPFAClosestPolicy = 74,
    NSOpenGLPFARobust = 75,
    NSOpenGLPFABackingStore = 76,
    NSOpenGLPFAMPSafe = 78,
    NSOpenGLPFAWindow = 80,
    NSOpenGLPFAMultiScreen = 81,
    NSOpenGLPFACompliant = 83,
    NSOpenGLPFAScreenMask = 84,
    NSOpenGLPFAVirtualScreenCount = 128
} NSOpenGLPixelFormatAttribute;
```

### *NSOpenGLPixelFormatAuxiliary*

```
typedef struct _CGLPixelFormatObject NSOpenGLPixelFormatAuxiliary;
```

### *NSPopUpArrowPosition*

```
typedef enum {
    NSPopUpNoArrow = 0,
    NSPopUpArrowAtCenter = 1,
    NSPopUpArrowAtBottom = 2
} NSPopUpArrowPosition;
```

### *NSPrinterTableStatus*

```
typedef enum _NSPrinterTableStatus {
    NSPrinterTableOK = 0,
    NSPrinterTableNotFound = 1,
    NSPrinterTableError = 2
} NSPrinterTableStatus;
```

### *NSPrintingOrientation*

```
typedef enum {
    NSPortraitOrientation = 0,
    NSLandscapeOrientation = 1
} NSPrintingOrientation;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### *NSPrintingPageOrder*

```
typedef enum _NSPrintingPageOrder {
    NSDescendingPageOrder = (-1),
    NSSpecialPageOrder = 0,
    NSAscendingPageOrder = 1,
    NSUnknownPageOrder = 2
} NSPrintingPageOrder;
```

### *NSPrintingPaginationMode*

```
typedef enum {
    NSAutoPagination = 0,
    NSFitPagination = 1,
    NSClipPagination = 2
} NSPrintingPaginationMode;
```

### *NSProgressIndicatorStyle*

```
typedef enum _NSProgressIndicatorStyle {
    NSProgressIndicatorBarStyle = 0,
    NSProgressIndicatorSpinningStyle = 1
} NSProgressIndicatorStyle;
```

### *NSProgressIndicatorThickness*

```
typedef enum _NSProgressIndicatorThickness {
    NSProgressIndicatorPreferredThickness = 14,
    NSProgressIndicatorPreferredSmallThickness = 10,
    NSProgressIndicatorPreferredLargeThickness = 18,
    NSProgressIndicatorPreferredAquaThickness = 12
} NSProgressIndicatorThickness;
```

### *NSQTMovieLoopMode*

```
typedef enum {
    NSQTMovieNormalPlayback,
    NSQTMovieLoopingPlayback,
    NSQTMovieLoopingBackAndForthPlayback
} NSQTMovieLoopMode;
```

### *NSRequestUserAttentionType*

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
typedef enum {
    NSCriticalRequest = 0,
    NSInformationalRequest = 10
} NSRequestUserAttentionType;
```

*NSRulerOrientation*

---

```
typedef enum {
    NSHorizontalRuler,
    NSVerticalRuler
} NSRulerOrientation;
```

*NSSaveOperationType*

---

```
typedef enum _NSSaveOperationType {
    NSSaveOperation = 0,
    NSSaveAsOperation = 1,
    NSSaveToOperation = 2
} NSSaveOperationType;
```

*NSScreenAuxiliaryOpaque*

```
typedef struct NSScreenAuxiliary NSScreenAuxiliaryOpaque;
```

*NSScrollArrowPosition*

```
typedef enum _NSScrollArrowPosition {
    NSScrollerArrowsDefaultSetting = 0,
    NSScrollerArrowsNone = 2
} NSScrollArrowPosition;
```

*NSScrollerArrow*

```
typedef enum _NSScrollerArrow {
    NSScrollerIncrementArrow = 0,
    NSScrollerDecrementArrow = 1
} NSScrollerArrow;
```

*NSScrollerPart*

```
typedef enum _NSScrollerPart {
    NSScrollerNoPart = 0,
    NSScrollerDecrementPage = 1,
    NSScrollerKnob = 2,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSScrollerIncrementPage = 3,
    NSScrollerDecrementLine = 4,
    NSScrollerIncrementLine = 5,
    NSScrollerKnobSlot = 6
} NSScrollerPart;
```

### *NSSelectionAffinity*

---

```
typedef enum _NSSelectionAffinity {
    NSSelectionAffinityUpstream = 0,
    NSSelectionAffinityDownstream = 1
} NSSelectionAffinity;
```

### *NSSelectionDirection*

---

```
typedef enum _NSSelectionDirection {
    NSDirectSelection = 0,
    NSSelectingNext,
    NSSelectingPrevious
} NSSelectionDirection;
```

### *NSSelectionGranularity*

```
typedef enum _NSSelectionGranularity {
    NSSelectByCharacter = 0,
    NSSelectByWord = 1,
    NSSelectByParagraph = 2
} NSSelectionGranularity;
```

### *NSTableViewDropOperation*

```
typedef enum {
    NSTableViewDropOn,
    NSTableViewDropAbove
} NSTableViewDropOperation;
```

### *NSTabState*

```
typedef enum _NSTabState {
    NSSelectedTab = 0,
    NSBackgroundTab = 1,
    NSPressedTab = 2
} NSTabState;
```

### *NSTabViewItemAuxiliaryOpaque*

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
typedef struct NSTabViewItemAuxiliary NSTabViewItemAuxiliaryOpaque;
```

### *NSTabViewType*

```
typedef enum _NSTabViewType {
    NSTopTabsBezelBorder = 0,
    NSLeftTabsBezelBorder = 1,
    NSBottomTabsBezelBorder = 2,
    NSRightTabsBezelBorder = 3,
    NSNoTabsBezelBorder = 4,
    NSNoTabsLineBorder= 5,
    NSNoTabsNoBorder = 6
} NSTabViewType;
```

### *NSTextAlignment*

```
typedef enum _NSTextAlignment {
    NSLeftTextAlignment = 0,
    NSRightTextAlignment = 1,
    NSCenterTextAlignment = 2,
    NSJustifiedTextAlignment = 3,
    NSNaturalTextAlignment = 4
} NSTextAlignment;
```

### *NSTextFieldBezelStyle*

```
typedef enum {
    NSTextFieldSquareBezel  = 0,
    NSTextFieldRoundedBezel = 1
} NSTextFieldBezelStyle;
```

### *NSTextTabType*

```
typedef enum _NSTextTabType {
    NSLeftTabStopType = 0,
    NSRightTabStopType,
    NSCenterTabStopType,
    NSDecimalTabStopType
} NSTextTabType;
```

### *NSTickMarkPosition*

```
typedef enum _NSTickMarkPosition {
    NSTickMarkBelow = 0,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSTickMarkAbove = 1,
    NSTickMarkLeft = NSTickMarkAbove,
    NSTickMarkRight = NSTickMarkBelow
} NSTickMarkPosition;
```

### *NSTIFFCompression*

---

```
typedef enum _NSTIFFCompression {
    NSTIFFCompressionNone = 1,
    NSTIFFCompressionCCITTFAX3 = 3,
    NSTIFFCompressionCCITTFAX4 = 4,
    NSTIFFCompressionLZW = 5,
    NSTIFFCompressionJPEG = 6,
    NSTIFFCompressionNEXT = 32766,
    NSTIFFCompressionPackBits = 32773,
    NSTIFFCompressionOldJPEG = 32865
} NSTIFFCompression;
```

### *NSTitlePosition*

---

```
typedef enum _NSTitlePosition {
    NSNoTitle = 0,
    NSAboveTop = 1,
    NSAtTop = 2,
    NSBelowTop = 3,
    NSAboveBottom = 4,
    NSAtBottom = 5,
    NSBelowBottom = 6
} NSTitlePosition;
```

### *NSToolbarDisplayMode*

```
typedef enum {
    NSToolbarDisplayModeDefault,
    NSToolbarDisplayModeIconAndLabel,
    NSToolbarDisplayModeIconOnly,
    NSToolbarDisplayModeLabelOnly
} NSToolbarDisplayMode;
```

### *NSToolbarSizeMode*

```
typedef enum {
    NSToolbarSizeModeDefault,
    NSToolbarSizeModeRegular,
    NSToolbarSizeModeSmall
} NSToolbarSizeMode;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

## NSToolTipTag

```
typedef int NSToolTipTag;
```

## NSTrackingRectTag

```
typedef int NSTrackingRectTag;
```

## NSTypesetterBehavior

```
typedef enum {
    NSTypesetterLatestBehavior = -1,
    NSTypesetterOriginalBehavior = 0,
    NSTypesetterBehavior_10_2_WithCompatibility = 1,
    NSTypesetterBehavior_10_2 = 2,
} NSTypesetterBehavior;
```

## NSTypesetterGlyphInfo

```
typedef struct _NSTypesetterGlyphInfo {
    NSPoint curLocation;
    float extent;
    float belowBaseline;
    float aboveBaseline;
    unsigned glyphCharacterIndex;
    NSFont *font;
    NSSize attachmentSize;
    struct {
        BOOL defaultPositioning:1;
        BOOL dontShow:1;
        BOOL isAttachment:1;
    } _giflags;
} NSTypesetterGlyphInfo;
```

## NSUsableScrollerParts

```
typedef enum _NSUsableScrollerParts {
    NSNoScrollerParts = 0,
    NSOnlyScrollerArrows = 1,
    NSAllScrollerParts = 2
} NSUsableScrollerParts;
```

## NSWindingRule

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
typedef enum {
    NSNonZeroWindingRule = 0,
    NSEvenOddWindingRule = 1
} NSWindingRule;
```

### *NSWindowAuxiliaryOpaque*

---

```
typedef struct NSWindowAuxiliary NSWindowAuxiliaryOpaque;
```

### *NSWindowButton*

---

```
typedef enum {
    NSWindowCloseButton,
    NSWindowMiniaturizeButton,
    NSWindowZoomButton,
    NSWindowToolbarButton,
    NSWindowDocumentIconButton
} NSWindowButton;
```

### *NSWindowDepth*

```
typedef int NSWindowDepth;
```

### *NSWindowOrderingMode*

```
typedef enum _NSWindowOrderingMode {
    NSWindowAbove = 1,
    NSWindowBelow = -1,
    NSWindowOut = 0
} NSWindowOrderingMode;
```

### *NSWritingDirection*

```
typedef enum _NSWritingDirection {
    NSWritingDirectionLeftToRight = 0,
    NSWritingDirectionRightToLeft
} NSWritingDirection;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 11.2 Enumerations

This section lists the enumeration constants defined by and used in theApplication Kit.

### *NSApplication (Modal Session Return Values)*

```
enum {
    NSRunStoppedResponse = (-1000),
    NSRunAbortedResponse = (-1001),
    NSRunContinuesResponse = (-1002)
};
```

### *NSAttributedString (Underlining)*

```
enum {
    NSNoUnderlineStyle = 0,
    NSSingleUnderlineStyle
};
```

### *NSCell (Data Entry Types)*

```
enum {
    NSAnyType = 0,
    NSIntType = 1,
    NSPositiveIntType = 2,
    NSFloatType = 3,
    NSPositiveFloatType = 4,
    NSDoubleType = 6,
    NSPositiveDoubleType = 7
};
```

### *NSCell (State Masks)*

```
enum {
    NSNoCellMask = 0,
    NSContentsCellMask = 1,
    NSPushInCellMask = 2,
    NSChangeGrayCellMask = 4,
    NSChangeBackgroundCellMask = 8
};
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

### *NSColorPanel (Modes)*

```
enum {
    NSGrayModeColorPanel = 0,
    NSRGBModeColorPanel = 1,
    NSCMYKModeColorPanel = 2,
    NSHSBModeColorPanel = 3,
    NSCustomPaletteModeColorPanel = 4,
    NSColorListModeColorPanel = 5,
    NSWheelModeColorPanel = 6,
    NSCrayonModeColorPanel = 7
};
```

### *NSColorPanel (Mode Masks)*

```
enum {
    NSColorPanelGrayModeMask = 0x00000001,
    NSColorPanelRGBModeMask = 0x00000002,
    NSColorPanelCMYKModeMask = 0x00000004,
    NSColorPanelHSBModeMask = 0x00000008,
    NSColorPanelCustomPaletteModeMask = 0x00000010,
    NSColorPanelColorListModeMask = 0x00000020,
    NSColorPanelWheelModeMask = 0x00000040,
    NSColorPanelCrayonModeMask = 0x00000080,
    NSColorPanelAllModesMask = 0x0000ffff
};
```

### *NSDragging (Operations)*

```
enum {
    NSDragOperationNone = 0,
    NSDragOperationCopy = 1,
    NSDragOperationLink = 2,
    NSDragOperationGeneric = 4,
    NSDragOperationPrivate = 8,
    NSDragOperationMove = 16,
    NSDragOperationDelete = 32,
    NSDragOperationEvery = UINT_MAX
};
```

### *NSEvent (Action Flags)*

```
enum {
    NSLeftMouseDownMask = 1 << NSLeftMouseDown,
    NSLeftMouseUpMask = 1 << NSLeftMouseUp,
    NSRightMouseDownMask = 1 << NSRightMouseDown,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSRightMouseUpMask = 1 << NSRightMouseUp,
    NSMouseMovedMask = 1 << NSMouseMoved,
    NSLeftMouseDraggedMask = 1 << NSLeftMouseDragged,
    NSRightMouseDraggedMask = 1 << NSRightMouseDragged,
    NSMouseEnteredMask = 1 << NSMouseEntered,
    NSMouseExitedMask = 1 << NSMouseExited,
    NSKeyDownMask = 1 << NSKeyDown,
    NSKeyUpMask = 1 << NSKeyUp,
    NSFlagsChangedMask = 1 << NSFlagsChanged,
    NSAppKitDefinedMask = 1 << NSAppKitDefined,
    NSSystemDefinedMask = 1 << NSSystemDefined,
    NSApplicationDefinedMask = 1 << NSApplicationDefined,
    NSPeriodicMask = 1 << NSPeriodic,
    NSCursorUpdateMask = 1 << NSCursorUpdate,
    NScrollWheelMask = 1 << NSScrollWheel,
    NSOtherMouseDownMask = 1 << NSOtherMouseDown,
    NSOtherMouseUpMask = 1 << NSOtherMouseUp,
    NSOtherMouseDraggedMask = 1 << NSOtherMouseDragged,
    NSAnyEventMask = 0xffffffffU
};
```

*NSEvent (Function Key Unicodes)*

```
enum {
    NSUpArrowFunctionKey = 0xF700,
    NSDownArrowFunctionKey = 0xF701,
    NSLeftArrowFunctionKey = 0xF702,
    NSRightArrowFunctionKey = 0xF703,
    NSF1FunctionKey = 0xF704,
    NSF2FunctionKey = 0xF705,
    NSF3FunctionKey = 0xF706,
    NSF4FunctionKey = 0xF707,
    NSF5FunctionKey = 0xF708,
    NSF6FunctionKey = 0xF709,
    NSF7FunctionKey = 0xF70A,
    NSF8FunctionKey = 0xF70B,
    NSF9FunctionKey = 0xF70C,
    NSF10FunctionKey = 0xF70D,
    NSF11FunctionKey = 0xF70E,
    NSF12FunctionKey = 0xF70F,
    NSF13FunctionKey = 0xF710,
    NSF14FunctionKey = 0xF711,
    NSF15FunctionKey = 0xF712,
    NSF16FunctionKey = 0xF713,
    NSF17FunctionKey = 0xF714,
    NSF18FunctionKey = 0xF715,
    NSF19FunctionKey = 0xF716,
    NSF20FunctionKey = 0xF717,
    NSF21FunctionKey = 0xF718,
    NSF22FunctionKey = 0xF719,
    NSF23FunctionKey = 0xF71A,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSF24FunctionKey = 0xF71B,
    NSF25FunctionKey = 0xF71C,
    NSF26FunctionKey = 0xF71D,
    NSF27FunctionKey = 0xF71E,
    NSF28FunctionKey = 0xF71F,
    NSF29FunctionKey = 0xF720,
    NSF30FunctionKey = 0xF721,
    NSF31FunctionKey = 0xF722,
    NSF32FunctionKey = 0xF723,
    NSF33FunctionKey = 0xF724,
    NSF34FunctionKey = 0xF725,
    NSF35FunctionKey = 0xF726,
    NSInsertFunctionKey = 0xF727,
    NSDeleteFunctionKey = 0xF728,
    NSHomeFunctionKey = 0xF729,
    NSBeginFunctionKey = 0xF72A,
    NSEndFunctionKey = 0xF72B,
    NSPageUpFunctionKey = 0xF72C,
    NSPageDownFunctionKey = 0xF72D,
    NSPrintScreenFunctionKey = 0xF72E,
    NSScrollLockFunctionKey = 0xF72F,
    NSPauseFunctionKey = 0xF730,
    NSSysReqFunctionKey = 0xF731,
    NSBreakFunctionKey = 0xF732,
    NSResetFunctionKey = 0xF733,
    NSStopFunctionKey = 0xF734,
    NSMenuFunctionKey = 0xF735,
    NSUserFunctionKey = 0xF736,
    NSSystemFunctionKey = 0xF737,
    NSPrintFunctionKey = 0xF738,
    NSClearLineFunctionKey = 0xF739,
    NSClearDisplayFunctionKey = 0xF73A,
    NSInsertLineFunctionKey = 0xF73B,
    NSDeleteLineFunctionKey = 0xF73C,
    NSInsertCharFunctionKey = 0xF73D,
    NSDeleteCharFunctionKey = 0xF73E,
    NSPrevFunctionKey = 0xF73F,
    NSNextFunctionKey = 0xF740,
    NSSelectFunctionKey = 0xF741,
    NSExecuteFunctionKey = 0xF742,
    NSUndoFunctionKey = 0xF743,
    NSRedoFunctionKey = 0xF744,
    NSFindFunctionKey = 0xF745,
    NSHelpFunctionKey = 0xF746,
    NSModeSwitchFunctionKey = 0xF747
};
```

*NSEvent (Modifier Flags)*

```
enum {
    NSAlphaShiftKeyMask = 1 << 16,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSShiftKeyMask = 1 << 17,
    NSControlKeyMask = 1 << 18,
    NSAlternateKeyMask = 1 << 19,
    NSCommandKeyMask = 1 << 20,
    NSNumericPadKeyMask = 1 << 21,
    NSHelpKeyMask = 1 << 22,
    NSFunctionKeyMask = 1 << 23
};
```

### *NSEvent (Types Defined by the Application Kit)*

---

```
enum {
    NSWindowExposedEventType = 0,
    NSApplicationActivatedEventType = 1,
    NSApplicationDeactivatedEventType = 2,
    NSWindowMovedEventType = 4,
    NSScreenChangedEventType = 8,
    NSAWTEventType = 16
};
```

### *NSEvent (Types Defined by the System)*

```
enum {
    NSPowerOffEventType = 1
};
```

### *NSFont (Traits)*

```
enum {
    NSItalicFontMask = 0x00000001,
    NSBoldFontMask = 0x00000002,
    NSUnboldFontMask = 0x00000004,
    NSNonStandardCharacterSetFontMask = 0x00000008,
    NSNarrowFontMask = 0x00000010,
    NSExpandedFontMask = 0x00000020,
    NSCondensedFontMask = 0x00000040,
    NSSmallCapsFontMask = 0x00000080,
    NSPosterFontMask = 0x00000100,
    NSCompressedFontMask = 0x00000200,
    NSFixedPitchFontMask = 0x00000400,
    NSUnitalicFontMask = 0x01000000
};
```

### *NSGraphics (Alpha Values)*

```
enum {
    NSAlphaEqualToData = 1,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSAlphaAlwaysOne = 2
};
```

*NSGlyph (Reserved Glyph Codes)*

---

```
enum {
    NSControlGlyph = 0x00FFFFFF,
    NSNullGlyph = 0x0
};
```

*NSImageRep (Display Device Matching)*

---

```
enum {
    NSImageRepMatchesDevice
};
```

*NSOutlineView (Drop on Index)*

---

```
enum {
    NSOutlineViewDropOnItemIndex = -1
};
```

*NSPanel (Alert Panel Return Values)*

```
enum {
    NSAlertDefaultReturn = 1,
    NSAlertAlternateReturn = 0,
    NSAlertOtherReturn = -1,
    NSAlertErrorReturn = -2
};
```

*NSPanel (Modal Panel Return Values)*

```
enum {
    NSOKButton = 1,
    NSCancelButton = 0
};
```

*NSPanel (Style Mask)*

```
enum {
    NSUtilityWindowMask = 1 << 4,
    NSDocModalWindowMask = 1 << 6,
    NSNonactivatingPanelMask = 1 << 7
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
};
```

*NSRunLoop (Ordering Modes for NSApplication)*

---

```
enum {
    NSUpdateWindowsRunLoopOrdering
};
```

*NSRunLoop (Ordering Modes for NSWindow)*

---

```
enum {
    NSDisplayWindowRunLoopOrdering,
    NSResetCursorRectsRunLoopOrdering
};
```

*NSSavePanel (Tags for Subviews)*

---

```
enum {
     NSFileHandlingPanelImageButton = 150,
     NSFileHandlingPanelTitleField = 151,
     NSFileHandlingPanelBrowser = 152,
    NSFileHandlingPanelCancelButton = NSCancelButton,
    NSFileHandlingPanelOKButton = NSOKButton,
     NSFileHandlingPanelForm = 155
};
```

*NSText (Important Unicodes)*

```
enum {
     NSParagraphSeparatorCharacter = 0x2029,
     NSLineSeparatorCharacter = 0x2028,
     NSTabCharacter = 0x0009,
     NSFormFeedCharacter = 0x000c,
     NSNewlineCharacter = 0x000a,
     NSCarriageReturnCharacter = 0x000d,
     NSEnterCharacter = 0x0003,
     NSBackspaceCharacter = 0x0008,
     NSBackTabCharacter = 0x0019,
     NSDeleteCharacter = 0x007f
};
```

*NSText (Movement Codes)*

```
enum {
     NSIllegalTextMovement = 0,
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    NSReturnTextMovement = 0x10,
    NSTabTextMovement = 0x11,
    NSBacktabTextMovement = 0x12,
    NSLeftTextMovement = 0x13,
    NSRightTextMovement = 0x14,
    NSUpTextMovement = 0x15,
    NSDownTextMovement = 0x16
};
```

### *NSTextAttachment (Attachment Character)*

---

```
enum {
    NSAttachmentCharacter = 0xfffc
};
```

### *NSTextStorage (Editing)*

---

```
enum {
    NSTextStorageEditedAttributes = 1,
    NSTextStorageEditedCharacters = 2
};
```

### *NSView (Resizing)*

```
enum {
    NSViewNotSizable = 0,
    NSViewMinXMargin = 1,
    NSViewWidthSizable = 2,
    NSViewMaxXMargin = 4,
    NSViewMinYMargin = 8,
    NSViewHeightSizable = 16,
    NSViewMaxYMargin = 32
};
```

### *NSWindow (Border Masks)*

```
enum {
    NSBorderlessWindowMask = 0,
    NSTitledWindowMask = 1 << 0,
    NSClosableWindowMask = 1 << 1,
    NSMiniaturizableWindowMask = 1 << 2,
    NSResizableWindowMask = 1 << 3,
    NSTexturedBackgroundWindowMask= 1 << 8
};
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 11.3 Global Variables

This section lists the global variables defined by and used in theApplication Kit.

### *Color Space Names*

---

```
NSString *NSCalibratedWhiteColorSpace;
NSString *NSCalibratedBlackColorSpace;
NSString *NSCalibratedRGBColorSpace;
NSString *NSDeviceWhiteColorSpace;
NSString *NSDeviceBlackColorSpace;
NSString *NSDeviceRGBColorSpace;
NSString *NSDeviceCMYKColorSpace;
NSString *NSNamedColorSpace;
NSString *NSPatternColorSpace;
NSString *NSCustomColorSpace;
```

### *Display Device (Descriptions)*

```
NSString *NSDeviceResolution;
NSString *NSDeviceColorSpaceName;
NSString *NSDeviceBitsPerSample;
NSString *NSDeviceIsScreen;
NSString *NSDeviceIsPrinter;
NSString *NSDeviceSize;
```

### *NSAccessibility (Actions)*

```
NSString *NSAccessibilityPressAction;
NSString *NSAccessibilityIncrementAction;
NSString *NSAccessibilityDecrementAction;
NSString *NSAccessibilityConfirmAction;
NSString *NSAccessibilityPickAction;
```

### *NSAccessibility (Attributes)*

```
NSString *NSAccessibilityRoleAttribute;
NSString *NSAccessibilityRoleDescriptionAttribute;
NSString *NSAccessibilitySubroleAttribute;
NSString *NSAccessibilityHelpAttribute;
NSString *NSAccessibilityTitleAttribute;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSString *NSAccessibilityValueAttribute;
NSString *NSAccessibilityMinValueAttribute;
NSString *NSAccessibilityMaxValueAttribute;
NSString *NSAccessibilityEnabledAttribute;
NSString *NSAccessibilityFocusedAttribute;
NSString *NSAccessibilityParentAttribute;
NSString *NSAccessibilityChildrenAttribute;
NSString *NSAccessibilityWindowAttribute;
NSString *NSAccessibilitySelectedChildrenAttribute;
NSString *NSAccessibilityVisibleChildrenAttribute;
NSString *NSAccessibilityPositionAttribute;
NSString *NSAccessibilitySizeAttribute;
NSString *NSAccessibilityContentsAttribute;
NSString *NSAccessibilityPreviousContentsAttribute;
NSString *NSAccessibilityNextContentsAttribute;
NSString *NSAccessibilitySelectedTextAttribute;
NSString *NSAccessibilitySelectedTextRangeAttribute;
NSString *NSAccessibilityMainAttribute;
NSString *NSAccessibilityMinimizedAttribute;
NSString *NSAccessibilityCloseButtonAttribute;
NSString *NSAccessibilityZoomButtonAttribute;
NSString *NSAccessibilityMinimizeButtonAttribute;
NSString *NSAccessibilityToolbarButtonAttribute;
NSString *NSAccessibilityProxyAttribute;
NSString *NSAccessibilityGrowAreaAttribute;
NSString *NSAccessibilityMenuBarAttribute;
NSString *NSAccessibilityWindowsAttribute;
NSString *NSAccessibilityFrontmostAttribute;
NSString *NSAccessibilityHiddenAttribute;
NSString *NSAccessibilityMainWindowAttribute;
NSString *NSAccessibilityFocusedWindowAttribute;
NSString *NSAccessibilityFocusedUIElementAttribute;
NSString *NSAccessibilityHeaderAttribute;
NSString *NSAccessibilityEditedAttribute;
NSString *NSAccessibilityTabsAttribute;
NSString *NSAccessibilityTitleUIElementAttribute;
NSString *NSAccessibilityHorizontalScrollBarAttribute;
NSString *NSAccessibilityVerticalScrollBarAttribute;
NSString *NSAccessibilityOverflowButtonAttribute;
NSString *NSAccessibilityIncrementButtonAttribute;
NSString *NSAccessibilityDecrementButtonAttribute;
NSString *NSAccessibilityFilenameAttribute;
NSString *NSAccessibilityExpandedAttribute;
NSString *NSAccessibilitySelectedAttribute;
NSString *NSAccessibilityColumnTitlesAttribute;
NSString *NSAccessibilitySplittersAttribute;
NSString *NSAccessibilityDocumentAttribute;
NSString *NSAccessibilityOrientationAttribute;
NSString *NSAccessibilityRowsAttribute;
NSString *NSAccessibilityVisibleRowsAttribute;
NSString *NSAccessibilitySelectedRowsAttribute;
NSString *NSAccessibilityColumnsAttribute;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSString *NSAccessibilityVisibleColumnsAttribute;
NSString *NSAccessibilitySelectedColumnsAttribute;
NSString *NSAccessibilitySortDirectionAttribute;
NSString *NSAccessibilityDisclosingAttribute;
NSString *NSAccessibilityDisclosedRowsAttribute;
NSString *NSAccessibilityDisclosedByRowAttribute;
```

### *NSAccessibility (Exception Error Code Key)*

---

```
NSString *NSAccessibilityErrorCodeExceptionInfo;
```

### *NSAccessibility (Notifications)*

---

```
NSString *NSAccessibilityMainWindowChangedNotification;
NSString *NSAccessibilityFocusedUIElementChangedNotification;
NSString *NSAccessibilityApplicationActivatedNotification;
NSString *NSAccessibilityApplicationDeactivatedNotification;
NSString *NSAccessibilityApplicationHiddenNotification;
NSString *NSAccessibilityApplicationShownNotification;
NSString *NSAccessibilityWindowCreatedNotification;
NSString *NSAccessibilityWindowMovedNotification;
NSString *NSAccessibilityWindowResizedNotification;
NSString *NSAccessibilityWindowMiniaturizedNotification;
NSString *NSAccessibilityWindowDeminiaturizedNotification;
NSString *NSAccessibilityValueChangedNotification;
NSString *NSAccessibilityUIElementDestroyedNotification;
```

### *NSAccessibility (Orientations)*

```
NSString *NSAccessibilityHorizontalOrientationValue;
NSString *NSAccessibilityVerticalOrientationValue;
```

### *NSAccessibility (Roles)*

```
NSString *NSAccessibilityUnknownRole;
NSString *NSAccessibilityButtonRole;
NSString *NSAccessibilityRadioButtonRole;
NSString *NSAccessibilityCheckBoxRole;
NSString *NSAccessibilitySliderRole;
NSString *NSAccessibilityTabGroupRole;
NSString *NSAccessibilityTextFieldRole;
NSString *NSAccessibilityStaticTextRole;
NSString *NSAccessibilityTextAreaRole;
NSString *NSAccessibilityScrollAreaRole;
NSString *NSAccessibilityPopUpButtonRole;
NSString *NSAccessibilityMenuButtonRole;
NSString *NSAccessibilityTableRole;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSString *NSAccessibilityApplicationRole;
NSString *NSAccessibilityGroupRole;
NSString *NSAccessibilityRadioGroupRole;
NSString *NSAccessibilityListRole;
NSString *NSAccessibilityScrollBarRole;
NSString *NSAccessibilityValueIndicatorRole;
NSString *NSAccessibilityImageRole;
NSString *NSAccessibilityMenuBarRole;
NSString *NSAccessibilityMenuRole;
NSString *NSAccessibilityMenuItemRole;
NSString *NSAccessibilityColumnRole;
NSString *NSAccessibilityRowRole;
NSString *NSAccessibilityToolbarRole;
NSString *NSAccessibilityBusyIndicatorRole;
NSString *NSAccessibilityProgressIndicatorRole;
NSString *NSAccessibilityRelevanceIndicatorRole;
NSString *NSAccessibilityWindowRole;
NSString *NSAccessibilityWindowTitleRole;
NSString *NSAccessibilityWindowProxyRole;
NSString *NSAccessibilityDrawerRole;
NSString *NSAccessibilitySystemWideRole;
NSString *NSAccessibilityOutlineRole;
NSString *NSAccessibilityIncrementorRole;
NSString *NSAccessibilityBrowserRole;
NSString *NSAccessibilityComboBoxRole;
NSString *NSAccessibilitySplitGroupRole;
NSString *NSAccessibilitySplitterRole;
NSString *NSAccessibilityColorWellRole;
NSString *NSAccessibilityGrowAreaRole;
NSString *NSAccessibilitySheetRole;
```

### *NSAccessibility (Subroles)*

```
NSString *NSAccessibilityUnknownSubrole;
NSString *NSAccessibilityCloseButtonSubrole;
NSString *NSAccessibilityZoomButtonSubrole;
NSString *NSAccessibilityMinimizeButtonSubrole;
NSString *NSAccessibilityToolbarButtonSubrole;
NSString *NSAccessibilityTableRowSubrole;
NSString *NSAccessibilityOutlineRowSubrole;
NSString *NSAccessibilitySecureTextFieldSubrole;
```

### *NSApplication (Shared Application Object)*

```
id NSApp;
```

### *NSAttributedString (Attributes)*

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSString *NSFontAttributeName;
NSString *NSParagraphStyleAttributeName;
NSString *NSForegroundColorAttributeName;
NSString *NSUnderlineStyleAttributeName;
NSString *NSSuperscriptAttributeName;
NSString *NSBackgroundColorAttributeName;
NSString *NSAttachmentAttributeName;
NSString *NSLigatureAttributeName;
NSString *NSBaselineOffsetAttributeName;
NSString *NSKernAttributeName;
NSString *NSLinkAttributeName;
```

### *NSAttributedString (Character Shape Attribute)*

---

```
NSString *NSCharacterShapeAttributeName;
```

### *NSAttributedString (Document Type)*

---

```
NSString *NSPlainTextDocumentType;
NSString *NSRTFTextDocumentType;
NSString *NSRTFDTextDocumentType;
NSString *NSMacSimpleTextDocumentType;
NSString *NSHTMLTextDocumentType;
```

### *NSAttributedString (Glyph Info Attribute)*

```
NSString *NSGlyphInfoAttributeName;
```

### *NSAttributedString (Underline Masks)*

```
unsigned NSUnderlineByWordMask;
unsigned NSUnderlineStrikethroughMask;
```

### *NSBitmapImageRep (Attributes)*

```
NSString *NSImageCompressionMethod;
NSString *NSImageCompressionFactor;
NSString *NSImageDitherTransparency;
NSString *NSImageRGBColorTable;
NSString *NSImageInterlaced;
NSString *NSImageColorSyncProfileData;
NSString *NSImageFrameCount;
NSString *NSImageCurrentFrame;
NSString *NSImageCurrentFrameDuration;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

## NSColor (Grayscale Values)

```
const float NSWhite;
const float NSLightGray;
const float NSDarkGray;
const float NSBlack;
```

## NSFont (Keys to the AFM Dictionary)

```
NSString *NSAFMFamilyName;
NSString *NSAFMFontName;
NSString *NSAFMFormatVersion;
NSString *NSAFMFullName;
NSString *NSAFMNotice;
NSString *NSAFMVersion;
NSString *NSAFMWeight;
NSString *NSAFMEncodingScheme;
NSString *NSAFMCharacterSet;
NSString *NSAFMCapHeight;
NSString *NSAFMXHeight;
NSString *NSAFMAscender;
NSString *NSAFMDescender;
NSString *NSAFMUnderlinePosition;
NSString *NSAFMUnderlineThickness;
NSString *NSAFMItalicAngle;
NSString *NSAFMMappingScheme;
```

## NSFont (PostScript Transformation Matrix)

```
const float *NSFontIdentityMatrix;
```

## NSGraphicsContext (Attributes)

```
NSString *NSGraphicsContextDestinationAttributeName;
NSString *NSGraphicsContextRepresentationFormatAttributeName;
NSString *NSGraphicsContextPSFormat;
NSString *NSGraphicsContextPDFFormat;
```

## NSInterfaceStyleDefault

```
NSString *NSInterfaceStyleDefault;
```

## NSPasteboard (Names)

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSString *NSGeneralPboard;
NSString *NSFontPboard;
NSString *NSRulerPboard;
NSString *NSFindPboard;
NSString *NSDragPboard;
```

### *NSPasteboard (Types for Sound Data)*

---

```
NSString *NSSoundPboardType;
```

### *NSPasteboard (Types for Standard Data)*

---

```
NSString *NSStringPboardType;
NSString *NSFilenamesPboardType;
NSString *NSPostScriptPboardType;
NSString *NSTIFFPboardType;
NSString *NSRTFPboardType;
NSString *NSTabularTextPboardType;
NSString *NSFontPboardType;
NSString *NSRulerPboardType;
NSString *NSFileContentsPboardType;
NSString *NSColorPboardType;
NSString *NSRTFDPboardType;
NSString *HTMLPboardType;
NSString *NSPICTPboardType;
NSString *NSURLPboardType;
NSString *NSPDFPboardType;
NSString *NSVCardPboardType;
NSString *NSFilesPromisePboardType;
```

### *NSPrintInfo (Dictionary Keys)*

```
NSString *NSPrintPaperName;
NSString *NSPrintPaperSize;
NSString *NSPrintMustCollate;
NSString *NSPrintOrientation;
NSString *NSPrintLeftMargin;
NSString *NSPrintRightMargin;
NSString *NSPrintTopMargin;
NSString *NSPrintBottomMargin;
NSString *NSPrintHorizontallyCentered;
NSString *NSPrintVerticallyCentered;
NSString *NSPrintHorizontalPagination;
NSString *NSPrintVerticalPagination;
NSString *NSPrintScalingFactor;
NSString *NSPrintAllPages;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSString *NSPrintReversePageOrder;
NSString *NSPrintFirstPage;
NSString *NSPrintLastPage;
NSString *NSPrintCopies;
NSString *NSPrintPrinter;
NSString *NSPrintJobDisposition;
NSString *NSPrintSavePath;
NSString *NSPrintSpoolJob;
NSString *NSPrintPreviewJob;
NSString *NSPrintSaveJob;
NSString *NSPrintCancelJob;
```

### *NSPrintPanel (Job Style Hints)*

---

```
NSString *NSPrintPhotoJobStyleHint;
```

### *NSRunLoop (Modes)*

---

```
NSString *NSModalPanelRunLoopMode;
NSString *NSEventTrackingRunLoopMode;
```

### *NSToolbarItem (Standard Identifiers)*

```
NSString *NSToolbarSeparatorItemIdentifier;
NSString *NSToolbarSpaceItemIdentifier;
NSString *NSToolbarFlexibleSpaceItemIdentifier;
NSString *NSToolbarShowColorsItemIdentifier;
NSString *NSToolbarShowFontsItemIdentifier;
NSString *NSToolbarCustomizeToolbarItemIdentifier;
NSString *NSToolbarPrintItemIdentifier;
```

### *NSWindow (Sizes)*

```
NSSize NSIconSize;
NSSize NSTokenSize;
```

### *NSWindow (Window Levels)*

```
NSString *NSNormalWindowLevel
NSString *NSFloatingWindowLevel
NSString *NSSubmenuWindowLevel
NSString *NSTornOffMenuWindowLevel
NSString *NSMainMenuWindowLevel
NSString *NSStatusWindowLevel
NSString *NSModalPanelWindowLevel
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSString *NSPopUpMenuWindowLevel
NSString *NSScreenSaverWindowLevel
```

### NSWorkspace (File Operation Constants)

```
NSString *NSWorkspaceMoveOperation;
NSString *NSWorkspaceCopyOperation;
NSString *NSWorkspaceLinkOperation;
NSString *NSWorkspaceCompressOperation;
NSString *NSWorkspaceDecompressOperation;
NSString *NSWorkspaceEncryptOperation;
NSString *NSWorkspaceDecryptOperation;
NSString *NSWorkspaceDestroyOperation;
NSString *NSWorkspaceRecycleOperation;
NSString *NSWorkspaceDuplicateOperation;
```

### NSWorkspace (File Types)

```
NSString *NSPlainFileType;
NSString *NSDirectoryFileType;
NSString *NSApplicationFileType;
NSString *NSFilesystemFileType;
NSString *NSShellCommandFileType;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 11.4 Exceptions

This section lists the names of exceptions raised by Application Kit classes.

```
NSString *NSTextLineTooLongException;
NSString *NSTextNoSelectionException;
NSString *NSWordTablesWriteException;
NSString *NSWordTablesReadException;
NSString *NSTextReadException;
NSString *NSTextWriteException;
NSString *NSPasteboardCommunicationException;
NSString *NSPrintingCommunicationException;
NSString *NSAbortModalException;
NSString *NSAbortPrintingException;
NSString *NSIllegalSelectorException;
NSString *NSAppKitVirtualMemoryException;
NSString *NSBadRTFDirectiveException;
NSString *NSBadRTFFontTableException;
NSString *NSBadRTFStyleSheetException;
NSString *NSTypedStreamVersionException;
NSString *NSTIFFException;
NSString *NSPrintPackageException;
NSString *NSBadRTFColorTableException;
NSString *NSDraggingException;
NSString *NSColorListIOException;
NSString *NSColorListNotEditableException;
NSString *NSBadBitmapParametersException;
NSString *NSWindowServerCommunicationException;
NSString *NSFontUnavailableException;
NSString *NSPPDIncludeNotFoundException;
NSString *NSPPDParseException;
NSString *NSPPDIncludeStackOverflowException;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 12. Application Kit Functions

This chapter lists the functions defined by the Application Kit. These functions a grouped into the following categories:

- Accessibility
- Applications
- Events
- Fonts
- Graphics: general
- Graphics: window depth
- Interface styles
- OpenGL
- Panels
- Pasteboards
- System beep



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 12.1 Accessibility

The `NSAccessibilityPostNotification` function is used to post an accessibility notification, which cannot be posted to the default notification center. The remaining functions are used by the accessibility system in Cocoa to manage what objects are visible to assistive applications.

`NSAccessibilityPostNotification`

```
void NSAccessibilityPostNotification(id element, NSString *notification)
```

`NSAccessibilityUnignoredAncestor`

```
id NSAccessibilityUnignoredAncestor(id element)
```

`NSAccessibilityUnignoredChildren`

```
NSArray *NSAccessibilityUnignoredChildren(NSArray *originalChildren)
```

`NSAccessibilityUnignoredChildrenForOnlyChild`

```
NSArray *NSAccessibilityUnignoredChildrenForOnlyChild(id originalChild)
```

`NSAccessibilityUnignoredDescendant`

```
id NSAccessibilityUnignoredDescendant(id element)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 12.2 Applications

These functions are used for various application level tasks, such as loading and running an application, and managing the Services menu for an application.

NSApplicationLoad

```
BOOL NSApplicationLoad(void)
```

NSApplicationMain

```
int NSApplicationMain(int argc, const char *argv[ ])
```

NSPerformService

```
BOOL NSPerformService(NSString *itemName, NSPasteboard *pboard)
```

NSRegisterServicesProvider

```
void NSRegisterServicesProvider(id provider, NSString *name)
```

NSShowsServicesMenuItem

```
BOOL NSShowsServicesMenuItem(NSString * itemName)
```

NSSetShowsServicesMenuItem

```
int NSSetShowsServicesMenuItem(NSString * itemName, BOOL enabled)
```

NSUnRegisterServicesProvider

```
void NSUnRegisterServicesProvider(NSString *name)
```

NSUpdateDynamicServices

```
void NSUpdateDynamicServices(void)
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## 12.3 Events

This single event-related function is used to obtain anevent mask for the specified event type.

NSEventMaskFromType

```
unsigned int NSEventMaskFromType(NSEventType type)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## 12.4 Fonts

These two functions are used to manipulate font glyphs.

`NSConvertGlyphsToPackedGlyphs`

```
int NSConvertGlyphsToPackedGlyphs(NSGlyph *glBuf, int count,
NSMultibyteGlyphPacking packing, char *packedGlyphs)
```

`NSGlyphInfoAtIndex`

```
void NSGlyphInfoAtIndex(int IX)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 12.5 Graphics: General

These functions provide a number of convenient wrappers to commongraphics and drawing tasks, such as erasing the contents of a rectangle, drawing various borders, and more.

NSCopyBits

```
void NSCopyBits(int srcGState, NSRect srcRect, NSPoint destPoint)
```

NSCountWindows

```
void NSCountWindows(int *count)
```

NSCountWindowsForContext

```
void NSCountWindowsForContext(int context, int *count)
```

NSDottedFrameRect

```
void NSDottedFrameRect(NSRect aRect)
```

NSDrawBitmap

```
void NSDrawBitmap(const NSRect rect, int pixelsWide, int pixelsHigh, int
bitsPerSample, int samplesPerPixel, int bitsPerPixel, int bytesPerRow, BOOL isPlanar,
BOOL hasAlpha, NSColorSpace colorSpace, const unsigned char *const data[5])
```

NSDrawButton

```
void NSDrawButton(const NSRect aRect, const NSRect clipRect)
```

NSDrawColorTiledRects

```
NSRect NSDrawColorTiledRects(NSRect boundsRect, NSRect clipRect, const NSRectEdge
*sides, NSColor **colors, int count)
```

NSDrawDarkBezel

```
void NSDrawDarkBezel(NSRect boundsRect, NSRect clipRect)
```

NSDrawGrayBezel

```
void NSDrawGrayBezel(NSRect boundsRect, NSRect clipRect)
```

NSDrawGroove

```
void NSDrawGroove(NSRect boundsRect, NSRect clipRect)
```

NSDrawLightBezel

```
void NSDrawLightBezel(NSRect boundsRect, NSRect clipRect)
```

NSDrawTiledRects

```
NSRect NSDrawTiledRects(NSRect boundsRect, NSRect clipRect, const NSRectEdge *sides,
const float *grays, int count);
```

NSDrawWhiteBezel

```
void NSDrawWhiteBezel(NSRect aRect, NSRect clipRect)
```

NSDrawWindowBackground

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
void NSDrawWindowBackground(NSRect aRect)
NSEraseRect

void NSEraseRect(const NSRect aRect)
NSFrameRect

void NSFrameRect(NSRect aRect)
NSFrameRectWithWidth

void NSFrameRectWithWidth(NSRect aRect, float frameWidth)
NSFrameRectWithWidthUsingOperation

void NSFrameRectWithWidthUsingOperation(NSRect aRect, float frameWidth,
NSCompositingOperation op)
NSGetWindowServerMemory

int NSGetWindowServerMemory(int context, int *virtualMemory, int *window-
BackingMemory, NSString **windowDumpStream)
NSHighlightRect

void NSHighlightRect(const NSRect aRect)
NSReadPixel

NSColor *NSReadPixel(NSPoint passedPoint)
NSRectClip

void NSRectClip(NSRect aRect)
NSRectClipList

void NSRectClipList(const NSRect *rects, int count)
NSRectFill

void NSRectFill(const NSRect aRect)
NSRectFillList

void NSRectFillList(const NSRect *rects, int count)
NSRectFillListWithColors

void NSRectFillListWithColors(const NSRect *rects, NSColor **colors, int count)
NSRectFillListWithGrays

void NSRectFillListWithGrays(const NSRect *rects, const float *grays, int count)
NSRectFillUsingOperation

void NSRectFillUsingOperation(NSRect aRect, NSCompositingOperation op)
NSRectFillListUsingOperation

void NSRectFillListUsingOperation(const NSRect *rects, int count,
NSCompositingOperation op)
NSRectFillListWithColorsUsingOperation

void NSRectFillListWithColorsUsingOperation(const NSRect *rects, NSColor **colors,
int count, NSCompositingOperation op)
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSSetFocusRingStyle

```
void NSSetFocusRingStyle(NSFocusRingPlacement placement)
```

NSWindowList

```
void NSWindowList(int size, int list[ ])
```

NSWindowListForContext

```
void NSWindowListForContext(int context, int size, int list[ ])
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 12.6 Graphics: Window Depth

These functions are used to obtain information about the bit-depth of windows.

NSAvailableWindowDepths

```
const NSWindowDepth *NSAvailableWindowDepths(void)
```

NSBestDepth

```
NSWindowDepth NSBestDepth(NSString *colorSpace, int bps, int bpp, BOOL planar, BOOL
*exactMatch)
```

NSBitsPerPixelFromDepth

```
int NSBitsPerPixelFromDepth(NSWindowDepth depth)
```

NSBitsPerSampleFromDepth

```
int NSBitsPerSampleFromDepth(NSWindowDepth depth)
```

NSColorSpaceFromDepth

```
NSString *NSColorSpaceFromDepth(NSWindowDepth depth)
```

NSNumberOfColorComponents

```
int NSNumberOfColorComponents(NSString *colorSpaceName)
```

NSPlanarFromDepth

```
BOOL NSPlanarFromDepth(NSWindowDepth depth)
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 12.7 Interface Styles

Thie function returns the interface style for the specified key and responder objects. Interface styles are described by the `NSInterfaceStyle` enumerator type, which may be one of the following constants:

- `NSNoInterfaceStyle`
- `NSNextStepInterfaceStyle`
- `NSWindows95InterfaceStyle`
- `NSMacintoshInterfaceStyle`
- `NSInterfaceStyleForKey`

```
NSInterfaceStyle
    NSInterfaceStyleForKey(NSString *key, NSResponder *responder)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 12.8 OpenGL

These functions are used to set and get global OpenGL options, as well as to obtain the version number of the installed OpenGL libraries.

NSOpenGLGetOption

```
void NSOpenGLGetOption(NSOpenGLGlobalOption pname, long *param)
```

NSOpenGLGetVersion

```
void NSOpenGLGetVersion(long *major, long *minor)
```

NSOpenGLSetOption

```
void NSOpenGLSetOption(NSOpenGLGlobalOption pname, long param)
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# 12.9 Panels

These functions provide a convenient way to display common alertpanels and sheets. These functions let us create panels or sheets for informational purposes, to inform the user of an alert, and to inform the user of a critical alert.

NSBeginAlertSheet

```
void NSBeginAlertSheet(NSString *title, NSString *defaultButton, NSString
*alternateButton, NSString *otherButton, NSWindow *docWindow, id modalDelegate, SEL
didEndSelector, SEL didDismissSelector, void *contextInfo, NSString *msg, ...)
```

NSBeginCriticalAlertSheet

```
void NSBeginCriticalAlertSheet(NSString *title, NSString *defaultButton, NSString
*alternateButton, NSString *otherButton, NSWindow *docWindow, id modalDelegate, SEL
didEndSelector, SEL didDismissSelector, void *contextInfo, NSString *msg, ...)
```

NSBeginInformationalAlertSheet

```
void NSBeginInformationalAlertSheet(NSString *title, NSString *defaultButton,
NSString *alternateButton, NSString *otherButton, NSWindow *docWindow, id
modalDelegate, SEL didEndSelector, SEL didDismissSelector, void *contextInfo,
NSString *msg, ...);
```

NSGetAlertPanel

```
id NSGetAlertPanel(NSString *title, NSString *msg, NSString *default-Button,
NSString *alternateButton, NSString *otherButton, ...)
```

NSGetCriticalAlertPanel

```
id NSGetCriticalAlertPanel(NSString *title, NSString *msg, NSString *defaultButton,
NSString *alternateButton, NSString *otherButton, ...)
```

NSGetInformationalAlertPanel

```
id NSGetInformationalAlertPanel(NSString *title, NSString *msg, NSString
*defaultButton, NSString *alternateButton, NSString *otherButton, ...)
```

NSReleaseAlertPanel

```
void NSReleaseAlertPanel(id alertPanel)
```

NSRunAlertPanel

```
int NSRunAlertPanel(NSString *title, NSString *msg, NSString *default-Button,
NSString *alternateButton, NSString *otherButton, ...)
```

NSRunCriticalAlertPanel

```
int NSRunCriticalAlertPanel(NSString *title, NSString *msg, NSString
*defaultButton, NSString *alternateButton, NSString *otherButton, ...)
```

NSRunInformationalAlertPanel

```
int NSRunInformationalAlertPanel(NSString *title, NSString *msg, NSString
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
*defaultButton, NSString *alternateButton, NSString *otherButton, ...)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 12.10 Pasteboards

These functions provide a means to manage pasteboard file types.

NSCreateFileContentsPboardType

```
NSString *NSCreateFileContentsPboardType(NSString *fileType)
```

NSCreateFilenamePboardType

```
NSString *NSCreateFilenamePboardType(NSString *fileType)
```

NSGetFileType

```
NSString *NSGetFileType(NSArray *pboardType)
```

NSGetFileTypes

```
NSArray *NSGetFileTypes(NSArray *pboardType)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# 12.11 System Beep

This function is used to sound the system alert sound selected by the user in the Sound system preferences. See the Application Kit class `NSSound` for more information.

`NSBeep`

```
void NSBeep(void)
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 13. Foundation Classes

This chapter covers the classes of the Foundation framework. The Foundation framework implements a basic set of classes used in data management, application coordination, networking and inter-application communication, as well as for interacting with core operating system services. Chapter 2 discussed in depth many Foundation classes. Chapter 6 discussed several of the Foundation classes related to networking.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSAppleEventDescriptor* *Mac OS X 10.0*

This class is primarily used to retrieve information about an Apple Event in a Cocoa application. A handf
Foundation framework either take an event descriptor object or return one. For example, in the classNSA
`NSAppleEventDescriptor` object to be returned by the script execution methods. This class is only usef
other objects, or to extract information about an Apple Event descriptor. Currently, Cocoa has no mecha
must rely on the Carbon Apple Event APIs.

```
@interface NSAppleEventDescriptor : NSObject <NSCopying>
 // Initializers
   - (id)initListDescriptor;
   - (id)initRecordDescriptor;
   - (id)initWithAEDescNoCopy:(const AEDesc *)aeDesc;
   - (id)initWithDescriptorType:(DescType)descriptorType  bytes:(const void *)bytes le
   - (id)initWithDescriptorType:(DescType)descriptorType  data:(NSData *)data;
   - (id)initWithEventClass:(AEEventClass)eventClass eventID:(AEEventID)eventID
       targetDescriptor:(NSAppleEventDescriptor *)targetDescriptor returnID:(AEReturn
       transactionID:(AETransactionID)transactionID;
 // Accessor Methods
   - (void)setDescriptor:(NSAppleEventDescriptor *)descriptor forKeyword:(AEKeyword)ke
   - (void)setAttributeDescriptor:(NSAppleEventDescriptor *)descriptor forKeyword:(AEKe
   - (void)setParamDescriptor:(NSAppleEventDescriptor *)descriptor forKeywor
 // Class Methods
   + (NSAppleEventDescriptor *)appleEventWithEventClass:(AEEventClass)eventClass event
       targetDescriptor:(NSAppleEventDescriptor *)targetDescriptor returnID:(AEReturn
       transactionID:(AETransactionID)transactionID; transactionID:(AETransactionID)t
   + (NSAppleEventDescriptor *)descriptorWithBoolean:(Boolean)boolean;
   + (NSAppleEventDescriptor *)descriptorWithDescriptorType:(DescType)descriptorType
       bytes:(const void *)bytes length:(unsigned int)byteCount;
   + (NSAppleEventDescriptor *)descriptorWithDescriptorType:(DescType)descriptorType d
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSAppleEventDescriptor *)descriptorWithEnumCode:(OSType)enumerator;
+ (NSAppleEventDescriptor *)descriptorWithInt32 :(SInt32)signedInt;
+ (NSAppleEventDescriptor *)descriptorWithString:(NSString *)string;
+ (NSAppleEventDescriptor *)descriptorWithTypeCode:(OSType)typeCode;
+ (NSAppleEventDescriptor *)listDescriptor;
+ (NSAppleEventDescriptor *)nullDescriptor;
+ (NSAppleEventDescriptor *)recordDescriptor;
// Instance Methods
- (NSAppleEventDescriptor *)coerceToDescriptorType:(DescType)descriptorType;
- (const AEDesc *)aeDesc;
- (NSAppleEventDescriptor *)attributeDescriptorForKeyword:(AEKeyword)keyword;
- (Boolean)booleanValue;
- (NSData *)data;
- (NSAppleEventDescriptor *)descriptorAtIndex:(long int)index;
- (NSAppleEventDescriptor *)descriptorForKeyword:(AEKeyword)keyword;
- (DescType)descriptorType;
- (OSType)enumCodeValue;
- (AEEventClass)eventClass;
- (AEEventID)eventID;
- (void)insertDescriptor:(NSAppleEventDescriptor *)descriptor atIndex:(long int)inde
- (SInt32)int32Value;
- (AEKeyword)keywordForDescriptorAtIndex:(long int)index;
- (int)numberOfItems;
- (NSAppleEventDescriptor *)paramDescriptorForKeyword:(AEKeyword)keyword;
- (void)removeDecriptorAtIndex:(long int)index;
- (void)removeDescriptorAtIndex:(long int)index;
- (void)removeDescriptorWithKeyword:(AEKeyword)keyword;
- (void)removeParamDescriptorWithKeyword:(AEKeyword)keyword;
- (AEReturnID)returnID;
- (NSString *)stringValue;
- (AETransactionID)transactionID;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (OSType)typeCodeValue;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSAppleEventManager* *Mac OS X 10.0*

This class is used to `register` objects as handlers of raw Apple Events in a Cocoa application. Instances responsible for registering and unregistering handlers, but are also responsible for dispatching events to application has a single instance of `NSAppleEventManager` that is shared among its objects; this event m method `sharedAppleEventManager` .

```
@interface NSAppleEventManager : NSObject
 // Accessor Methods
   - (void)setEventHandler:(id)handler andSelector:(SEL)handleEventSelector forEventCla
       andEventID:(AEEventID)eventID;
 // Class Methods
   + (NSAppleEventManager *)sharedAppleEventManager;
 // Instance Methods
   - (OSErr)dispatchRawAppleEvent:(const AppleEvent *)theAppleEvent withRawReply:(Appl
       handlerRefCon:(UInt32)handlerRefCon;
   - (void)removeEventHandlerForEventClass:(AEEventClass)eventClass andEventID:(AEEvent
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSAppleScript* *Mac OS X 10.2*

This class gives clients the ability to load, compile, and runAppleScripts. This class provides methods to source code, or with a precompiled script. With an initialized object, clients can compile or execute scrip extension to the `NSAppleScript` class that is used to obtain colored source code for a given script.

```
@interface NSAppleScript : NSObject <NSCopying>
 // Initializers
   - (id)initWithContentsOfURL:(NSURL *)url error:(NSDictionary **)errorInfo;
   - (id)initWithSource:(NSString *)source;
 // Instance Methods
   - (BOOL)compileAndReturnError:(NSDictionary **)errorInfo;
   - (NSAppleEventDescriptor *)executeAndReturnError:(NSDictionary **)errorInfo;
   - (NSAppleEventDescriptor *)executeAppleEvent:(NSAppleEventDescriptor *)event error
   - (BOOL)isCompiled;
   - (NSAttributedString *)richTextSource;
   - (NSString *)source;
 // Methods Implementing NSCopying
   - (id)copyWithZone:(NSZone *)zone;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSArchiver* *Mac OS X 10.0*

This class is a concrete subclass of `NSCoder` used to archive a network of interconnected objects (an obje tree) into a data format that can be written to disk. The archive operation returns an `NSMutableData` obj containing this data. To archive an object, the class method `archivedDataWithRootObject :` is used, wh returns an `NSData` object containing the archived object. Alternatively, we can archive directly to a file u the class method `archiveRootObject:toFile :`. It is also possible to initialize an instance of `NSArchiver` with a pointer to an instance of `NSMutableData` using `initForWritingWithMutableData :`, thus providin more persistent archiving engine than if we simply used the class methods.

To retrieve objects from an archive, we use another subclass of `NSCoder` : `NSUnarchiver` . `NSArchiver` a `NSUnarchiver` support an archival scheme where objects and variables must be unarchived in the same order that they were archived. Mac OS X 10.2 introduced keyed-archiving, whereby every object and variable in an archive has an associated key that frees us from having to be strictly bound to the origina archive format. This has great benefits for improving the compatability of data files between versions of application.

For instances of a class to be archivable, that class must conform to the `NSCoding` protocol. See the `NSCoding` protocol description and Chapter 2 for more information about archiving.

```
@interface NSArchiver : NSCoder
 // Initializers
   - (id)initForWritingWithMutableData:(NSMutableData *)mdata;
 // Class Methods
   + (BOOL)archiveRootObject:(id)rootObject toFile:(NSString *)path;
   + (NSData *)archivedDataWithRootObject:(id)rootObject;
 // Instance Methods
   - (NSMutableData *)archiverData;
   - (NSString *)classNameEncodedForTrueClassName:(NSString *)trueName;
   - (void)encodeClassName:(NSString *)trueName  intoClassName:(NSString *)inArchiveNa
   - (void)encodeConditionalObject:(id)object;
   - (void)encodeRootObject:(id)rootObject;
   - (void)replaceObject:(id)object withObject:(id)newObject;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSArray* *Mac OS X 10.0*

This class manages an immutable ordered collection ofobjects. Objects are stored in an array by referen pointer to the object is stored rather than the object itself. When the object is added to an array, the ar sending a `retain` message to the object. When the array is released it sends a `release` message to eac

There are many methods for querying the contents of the array. The method `objectAtIndex` : is commc an object at some position in the array. Conversely, we can determine the index of some object using th `indexOfObject` :, which returns the lowest index of the member that is equivalent the specified object. number of objects contained within the array the `count` method is invoked.

To enumerate the contents of an array, create an `NSEnumerator` object for the array using one of two m `objectEnumerator` or `reverseObjectEnumerator` . A standard object enumerator will return the objects they exist within the array, while the reverse enumerator will return members starting from the last obj way forward. See the `NSEnumerator` class description for more information on enumerating collections.

Often we want to invoke some method in each member of a collection.`NSArray` provides a method that burden of having to enumerate the contents of the array and send the message manually. This method `makeObjectsPerformSelector` :, which will cause the method matching the selector to be invoked in ea collection. If you need to invoke a method that takes an argument, then use the method `makeObjectsPerformSelector:withObject` :.

`NSArray` is an immutable class. The class `NSMutableArray` supports ordered collections whose contents after initialization.

`NSArray` is toll-free bridged with the Core Foundation type `CFArray` . As such, `NSArray` objects can be us interchangeably with the `CFArray` pointer type, `CFArrayRef` .

```
@interface NSArray : NSObject <NSCoding, NSCopying, NSMutableCopying>
 // Convenience Constructors
   + (id)array;
   + (id)arrayWithArray:(NSArray *)array;
   + (id)arrayWithContentsOfFile:(NSString *)path;
   + (id)arrayWithContentsOfURL:(NSURL *)url;
   + (id)arrayWithObject:(id)anObject;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (id)arrayWithObjects:(id *)objs count:(unsigned)cnt;
+ (id)arrayWithObjects:(id)firstObj, ...;
// Initializers
- (id)initWithArray:(NSArray *)array;
- (id)initWithArray:(NSArray *)array copyItems:(BOOL)flag;
- (id)initWithContentsOfFile:(NSString *)path;
- (id)initWithContentsOfURL:(NSURL *)url;
- (id)initWithObjects:(id *)objects count:(unsigned)count;
- (id)initWithObjects:(id)firstObj, ...;
// Instance Methods
- (NSArray *)arrayByAddingObject:(id)anObject;
- (NSArray *)arrayByAddingObjectsFromArray:(NSArray *)otherArray;
- (NSString *)componentsJoinedByString:(NSString *)separator;
- (BOOL)containsObject:(id)anObject;
- (unsigned)count;
- (NSString *)description;
- (NSString *)descriptionWithLocale:(NSDictionary *)locale;
- (NSString *)descriptionWithLocale:(NSDictionary *)locale indent:(unsigned)level;
- (id)firstObjectCommonWithArray:(NSArray *)otherArray;
- (void)getObjects:(id *)objects;
- (void)getObjects:(id *)objects range:(NSRange)range;
- (unsigned)indexOfObject:(id)anObject;
- (unsigned)indexOfObject:(id)anObject  inRange:(NSRange)range;
- (unsigned)indexOfObjectIdenticalTo:(id)anObject;
- (unsigned)indexOfObjectIdenticalTo:(id)anObject inRange:(NSRange)range;
- (BOOL)isEqualToArray:(NSArray *)otherArray;
- (id)lastObject;
- (void)makeObjectsPerformSelector:(SEL)aSelector;
- (void)makeObjectsPerformSelector:(SEL)aSelector withObject:(id)argument;
- (id)objectAtIndex:(unsigned)index;
- (NSEnumerator *)objectEnumerator;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSArray *)pathsMatchingExtensions:(NSArray *)filterTypes;
- (NSEnumerator *)reverseObjectEnumerator;
- (NSData *)sortedArrayHint;
- (NSArray *)sortedArrayUsingFunction:(int (*)(id, id, void *))comparator context:(v
- (NSArray *)sortedArrayUsingFunction:(int (*)(id, id, void *))comparator context:(v
    context hint:(NSData *)hint;
- (NSArray *)sortedArrayUsingSelector:(SEL)comparator;
- (NSArray *)subarrayWithRange:(NSRange)range;
- (BOOL)writeToFile:(NSString *)path atomically:(BOOL)useAuxiliaryFile;
- (BOOL)writeToURL:(NSURL *)url atomically:(BOOL)atomically;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implementing NSMutableCopying
- (id)mutableCopyWithZone:(NSZone *)zone;
```

## Subclasses

NSMutableArray

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSAssertionHandler* *Mac OS X 10.0*

The `NSAssertionHandler` class is responsible for assertions that are created using the Foundation frame
Every thread has its own assertion handler object that is obtained through the class method`currentHan`
`NSAssertionHandler` provides the methods `handleFailureInMethod:object:file:lineNumber:descr`
`handleFailureInFunction:file:lineNumber:description` : to log error messages in response to ass
methods and functions, respectively.

The assertion macros allow the user to check for a given condition-that is, assert that a condition must b
condition is false, a string is passed to the assertion handler, and the handler is notified of the failed ass
assertion handler receives notification of a failed assertion it will print an error message that includes th
well as the class and method names where the assertion failure occurred. Additionally, an`NSInternalIn`
is raised. If this exception is not handled by the application, the application will exit.

The Foundation framework defines six assertion macros that can be used within an Objective-C method
`NSAssert2` , etc.) and six macros that may be used within a C function (`NSCAssert` , `NSCAssert1` , `NSCA`
these macros takes a condition that will be asserted, and a string that will be printed as part of the erro
macros allow the client to pass additional parameters for`printf` - style formatted strings.

```
@interface NSAssertionHandler : NSObject
 // Class Methods
   + (NSAssertionHandler *)currentHandler;
 // Instance Methods
   - (void)handleFailureInFunction:(NSString *)functionName file:(NSString *)fileName
       description:(NSString *)format,...;
   - (void)handleFailureInMethod:(SEL)selector object:(id)object file:(NSString *)file
       lineNumber:(int)line description:(NSString *)format,...;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSAttributedString* *Mac OS X 10.0*

This class represents a string with associated attributes that describe the styled appearance of the string dictionary. Cocoa defines several keys to identify common attributes such as the font, foreground color, more; these keys are listed below in the constants. This class has many methods for querying the attrib string. For example, the method `attributesAtIndex:effectiveRange` : returns a dictionary of attribute by reference the range that the attribute applies to is returned in the second parameter.

The Application Kit implements many extensions to `NSAttributedString` to support more graphical uses AppKit extensions provide support for initializing an attributed string with RTF-formatted data, as well as such data. Additionally, these extensions provide for drawing attributed strings into a view, and for man font and ruler characteristics.

`NSAttributedString` is an immutable class. Mutability is supported in the subclass `NSMutable-Attribut`

```
@interface NSAttributedString : NSObject <NSCoding, NSCopying, NSMutableCopying>
 // Initializers
   - (id)initWithAttributedString:(NSAttributedString *)attrStr;
   - (id)initWithHTML:(NSData *)data baseURL:(NSURL *)base documentAttributes:(NSDictio
   - (id)initWithHTML:(NSData *)data documentAttributes:(NSDictionary **)dict;
   - (id)initWithPath:(NSString *)path documentAttributes:(NSDictionary **)dict;
   - (id)initWithRTF:(NSData *)data documentAttributes:(NSDictionary **)dict;
   - (id)initWithRTFD:(NSData *)data documentAttributes:(NSDictionary **)dict;
   - (id)initWithRTFDFileWrapper:(NSFileWrapper *)wrapper documentAttributes:(NSDictio
   - (id)initWithString:(NSString *)str;
   - (id)initWithString:(NSString *)str attributes:(NSDictionary *)attrs;
   - (id)initWithURL:(NSURL *)url documentAttributes:(NSDictionary **)dict;
 // Class Methods
   + (NSAttributedString *)attributedStringWithAttachment:(NSTextAttachment *)attachme
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSArray *)textFileTypes;
+ (NSArray *)textPasteboardTypes;
+ (NSArray *)textUnfilteredFileTypes;
+ (NSArray *)textUnfilteredPasteboardTypes;
// Instance Methods
- (NSFileWrapper *)RTFDFileWrapperFromRange:(NSRange)range documentAttributes:(NSDic
- (NSData *)RTFDFromRange:(NSRange)range documentAttributes:(NSDictionary *)dict;
- (NSData *)RTFFromRange:(NSRange)range documentAttributes:(NSDictionary *)dict;
- (id)attribute:(NSString *)attrName atIndex:(unsigned int)location effectiveRange:
- (id)attribute:(NSString *)attrName atIndex:(unsigned int)location longestEffectiv
    inRange:(NSRange)rangeLimit; inRange:(NSRange)rangeLimit;
- (NSAttributedString *)attributedSubstringFromRange:(NSRange)range;
- (NSDictionary *)attributesAtIndex:(unsigned)location effectiveRange:(NSRangePointe
- (NSDictionary *)attributesAtIndex:(unsigned)location longestEffectiveRange:(NSRan
    inRange:(NSRange)rangeLimit;
- (BOOL)containsAttachments;
- (NSRange)doubleClickAtIndex:(unsigned)location;
- (void)drawAtPoint:(NSPoint)point;
- (void)drawInRect:(NSRect)rect;
- (NSDictionary *)fontAttributesInRange:(NSRange)range;
- (BOOL)isEqualToAttributedString:(NSAttributedString *)other;
- (unsigned)length;
- (unsigned)lineBreakBeforeIndex:(unsigned)location withinRange:(NSRange)aRange;
- (unsigned)nextWordFromIndex:(unsigned)location forward:(BOOL)isForward;
- (NSDictionary *)rulerAttributesInRange:(NSRange)range;
- (NSSize)size;
- (NSString *)string;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Methods Implementing NSMutableCopying
- (id)mutableCopyWithZone:(NSZone *)zone;
```

## Subclasses

NSMutableAttributedString

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSAutoreleasePool* *Mac OS X 10.0*

This class is used by Cocoa's memory management system to store objects that have been sent `autorelease` messages until the end of the current event-loop. At the end of the each pass through the event-loop the autorelease pool is deallocated, thereby releasing any objects referenced by the pool. At the beginning of each pass through the run-loop, a new instance of `NSAutoreleasePool` is created.

For Cocoa's memory management system to function properly there must be an autorelease pool present. If there is no autorelease pool present then your code will begin to leak memory, as objects will not be released. In this same vein, when you detach a new thread, that thread is responsible for creating its own autorelease pool. Autorelease pools are created just like any other object, using `alloc` and `init`. Multiple autorelease pools in a single thread of execution are maintained in a stack whereby objects being autoreleased are sent to the pool at the top of the stack.

The operational method of `NSAutoreleasePool` is `addObject:`, which adds the specified object to the pool, causing the object to be released when the pool is itself released. If an object is added multiple times, it will be sent a `release` message for each time it was added to the pool. You should never have to invoke `addObject:` yourself; that's the purpose of `NSObject`'s `autorelease` method.

```
@interface NSAutoreleasePool : NSObject
 // Class Methods
   + (void)addObject:(id)anObject;
   + (unsigned int)autoreleasedObjectCount;
   + (void)enableFreedObjectCheck:(BOOL)enable;
   + (void)enableRelease:(BOOL)enable;
   + (unsigned int)poolCountHighWaterMark;
   + (unsigned int)poolCountHighWaterResolution;
   + (void)resetTotalAutoreleasedObjects;
   + (void)setPoolCountHighWaterMark:(unsigned int)count;
   + (void)setPoolCountHighWaterResolution:(unsigned int)res;
   + (void)showPools;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (unsigned int)topAutoreleasePoolCount;
+ (unsigned)totalAutoreleasedObjects;
// Instance Methods
- (void)addObject:(id)anObject;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSBundle* *Mac OS X 10.0*

This class represents directories in the filesystem that containexecutable binaries, and any resources ne as images, sounds, or nibs. For more information about`NSBundle` , see Chapter 2 .

```
@interface NSBundle : NSObject
// Convenience Constructors
  + (NSBundle *)bundleForClass:(Class)aClass;
  + (NSBundle *)bundleWithIdentifier:(NSString *)identifier;
  + (NSBundle *)bundleWithPath:(NSString *)path;
// Initializers
  - (id)initWithPath:(NSString *)path;
// Class Methods
  + (NSArray *)allBundles;
  + (NSArray *)allFrameworks;
  + (BOOL)loadNibFile:(NSString *)fileName externalNameTable:(NSDictionary *)context w
  + (BOOL)loadNibNamed:(NSString *)nibName owner:(id)owner;
  + (NSBundle *)mainBundle;
  + (NSString *)pathForResource:(NSString *)name ofType:(NSString *)ext inDirectory:(N
  + (NSArray *)pathsForResourcesOfType:(NSString *)ext inDirectory:(NSString *)subpath
  + (NSArray *)preferredLocalizationsFromArray:(NSArray *)localizationsArray;
  + (NSArray *)preferredLocalizationsFromArray:(NSArray *)localizationsArray
      forPreferences:(NSArray *)preferencesArray;
// Instance Methods
  - (NSString *)builtInPlugInsPath;
  - (NSString *)bundleIdentifier;
  - (NSString *)bundlePath;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (Class)classNamed:(NSString *)className;
- (NSAttributedString *)contextHelpForKey:(NSString *)key;
- (NSString *)developmentLocalization;
- (NSString *)executablePath;
- (NSDictionary *)infoDictionary;
- (BOOL)isLoaded;
- (BOOL)load;
- (BOOL)loadNibFile:(NSString *)fileName externalNameTable:(NSDictionary *)context w
- (NSArray *)localizations;
- (NSDictionary *)localizedInfoDictionary;
- (NSString *)localizedStringForKey:(NSString *)key value:(NSString *)value table:(N
- (id)objectForInfoDictionaryKey:(NSString *)key;
- (NSString *)pathForAuxiliaryExecutable:(NSString *)executableName;
- (NSString *)pathForImageResource:(NSString *)name;
- (NSString *)pathForResource:(NSString *)name ofType:(NSString *)ext;
- (NSString *)pathForResource:(NSString *)name ofType:(NSString *)ext inDirectory:(N
- (NSString *)pathForResource:(NSString *)name ofType:(NSString *)ext inDirectory:(N
    forLocalization:(NSString *)localizationName;
- (NSString *)pathForSoundResource:(NSString *)name;
- (NSArray *)pathsForResourcesOfType:(NSString *)ext inDirectory:(NSString *)subpath
- (NSArray *)pathsForResourcesOfType:(NSString *)ext inDirectory:(NSString *)subpath
    forLocalization:(NSString *)localizationName;
- (NSArray *)preferredLocalizations;
- (Class)principalClass;
- (NSString *)privateFrameworksPath;
- (NSString *)resourcePath;
- (NSString *)sharedFrameworksPath;
- (NSString *)sharedSupportPath;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSCalendarDate* *Mac OS X 10.0*

This subclass of `NSDate` represents dates as users would recognize them on the Western Gregorian caler `NSCalendarDate` stores a date as the number of seconds since an absolute reference date. However, un return information about the date in terms of minutes, hours, days, weeks, months, and years. For exar `dayOfYear` we can determine the day of the year a date represents (1 through 366).`NSCalendarDate` is representations of dates using the `description..` . methods.

In addition to storing a date value, `NSCalendarDate` maintains a reference to an `NSTimeZone` object so tl converted according to the user's time zone. This time zone object is accessed with the methods`setTime`

```
@interface NSCalendarDate : NSDate
 // Initializers
   - (id)initWithString:(NSString *)description;
   - (id)initWithString:(NSString *)description calendarFormat:(NSString *)format;
   - (id)initWithString:(NSString *)description calendarFormat:(NSString *)format loca
   - (id)initWithYear:(int)year month:(unsigned)month day:(unsigned)day hour:(unsigned
       minute:(unsigned)minute second:(unsigned)second timeZone:(NSTimeZone *)aTimeZo
 // Accessor Methods
   - (void)setTimeZone:(NSTimeZone *)aTimeZone;
   - (NSTimeZone *)timeZone;
   - (void)setCalendarFormat:(NSString *)format;
   - (NSString *)calendarFormat;
 // Class Methods
   + (id)calendarDate;
   + (id)dateWithString:(NSString *)description calendarFormat:(NSString *)format;
   + (id)dateWithString:(NSString *)description calendarFormat:(NSString *)format loca
   + (id)dateWithYear:(int)year month:(unsigned)month day:(unsigned)day hour:(unsigned
       minute:(unsigned)minute second:(unsigned)second timeZone:(NSTimeZone *)aTimeZo
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Instance Methods
- (NSCalendarDate *)dateByAddingYears:(int)year months:(int)month days:(int)day hour
    minutes:(int)minute seconds:(int)second;
- (int)dayOfCommonEra;
- (int)dayOfMonth;
- (NSString *)description;
- (NSString *)descriptionWithCalendarFormat:(NSString *)format;
- (int)dayOfWeek;
- (int)dayOfYear;
- (NSString *)descriptionWithCalendarFormat:(NSString *)format locale:(NSDictionary
- (NSString *)descriptionWithLocale:(NSDictionary *)locale;
- (int)hourOfDay;
- (int)minuteOfHour;
- (int)monthOfYear;
- (int)secondOfMinute;
- (int)yearOfCommonEra;
- (void)years:(int *)yp months:(int *)mop days:(int *)dp hours:(int *)hp minutes:(i
    sinceDate:(NSCalendarDate *)date;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSCharacterSet — Mac OS X 10.0

A character set represents a collection of Unicode characters. An instance of `NSCharacterSet` is a static entity; `NSCharacterSet`'s subclass `NSMutableCharacterSet` defines an interface to a dynamic set of Unicode characters.

`NSCharacterSet` is toll-free bridged with the Core Foundation type `CFCharacterSet`. As such, `NSCharacterSet` objects can be used interchangeably with the `CFCharacterSet` pointer type, `CFCharacterSetRef`.

```
@interface NSCharacterSet : NSObject <NSCoding, NSCopying, NSMutableCopying>
 // Class Methods
   + (NSCharacterSet *)alphanumericCharacterSet;
   + (NSCharacterSet *)capitalizedLetterCharacterSet;
   + (NSCharacterSet *)characterSetWithBitmapRepresentation:(NSData *)data;
   + (NSCharacterSet *)characterSetWithCharactersInString:(NSString *)aString;
   + (NSCharacterSet *)characterSetWithContentsOfFile:(NSString *)fName;
   + (NSCharacterSet *)characterSetWithRange:(NSRange)aRange;
   + (NSCharacterSet *)controlCharacterSet;
   + (NSCharacterSet *)decimalDigitCharacterSet;
   + (NSCharacterSet *)decomposableCharacterSet;
   + (NSCharacterSet *)illegalCharacterSet;
   + (NSCharacterSet *)letterCharacterSet;
   + (NSCharacterSet *)lowercaseLetterCharacterSet;
   + (NSCharacterSet *)nonBaseCharacterSet;
   + (NSCharacterSet *)punctuationCharacterSet;
   + (NSCharacterSet *)uppercaseLetterCharacterSet;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSCharacterSet *)whitespaceAndNewlineCharacterSet;
+ (NSCharacterSet *)whitespaceCharacterSet;
// Instance Methods
- (NSData *)bitmapRepresentation;
- (BOOL)characterIsMember:(unichar)aCharacter;
- (BOOL)hasMemberInPlane:(uint8_t)thePlane;
- (NSCharacterSet *)invertedSet;
- (BOOL)isSupersetOfSet:(NSCharacterSet *)theOtherSet;
- (BOOL)longCharacterIsMember:(UTF32Char)theLongChar;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implementing NSMutableCopying
- (id)mutableCopyWithZone:(NSZone *)zone;
```

## Subclasses

NSMutableCharacterSet

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSClassDescription

Mac OS X 10.0

This class provides an intelligent interface to Foundation'skey-value coding capabilities (see NSKeyValue Chapter 2 ). The main purpose of this class is to provide an interface for objects to determine the prope characteristics of a class. NSClassDescription is an abstract class, upon which Foundation implements concrete subclass NSScriptClassDescription .

```
@interface NSClassDescription : NSObject
 // Class Methods
   + (NSClassDescription *)classDescriptionForClass:(Class)aClass;
   + (void)invalidateClassDescriptionCache;
   + (void)registerClassDescription:(NSClassDescription *)description forClass:(Class)a
 // Instance Methods
   - (NSArray *)attributeKeys;
   - (NSArray *)attributeKeys;
   - (NSClassDescription *)classDescription;
   - (NSString *)inverseForRelationshipKey:(NSString *)relationshipKey;
   - (NSString *)inverseForRelationshipKey:(NSString *)relationshipKey;
   - (NSArray *)toManyRelationshipKeys;
   - (NSArray *)toManyRelationshipKeys;
   - (NSArray *)toOneRelationshipKeys;
   - (NSArray *)toOneRelationshipKeys;
// Notifications
   NSClassDescriptionNeededForClassNotification;
```

## Subclasses

NSScriptClassDescription

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSCloneCommand* *Mac OS X 10.0*

Instances of this class clone the specified objectand then insert the cloned object into the location specified in the script. If no location is specified, the default location is used. This class is used in Cocoa's implementation of built-in AppleScript support, and as such clients should not need to access instances of this class directly.

```
@interface NSCloneCommand : NSScriptCommand
 // Accessor Methods
   - (void)setReceiversSpecifier:(NSScriptObjectSpecifier *)receiversRef;
 // Instance Methods
   - (NSScriptObjectSpecifier *)keySpecifier;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSCloseCommand — Mac OS X 10.0

Instances of this class close the specified object, which in Cocoa is generally an instance of `NSWindow` or `NSDocument`. This class is used in Cocoa's implementation of built-in AppleScript support, and as such clients should not need to access instances of this class directly.

```
@interface NSCloseCommand : NSScriptCommand
 // Instance Methods
   - (NSSaveOptions)saveOptions;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSCoder* *Mac OS X 10.0*

This class defines an abstract interface for subclasses that implementobject archival functionality. The F framework implements five concreate subclasses: `NSArchiver` and `NSUnarchiver` are used for non-keye while `NSKeyedArchiver` and `NSKeyedUnarchiver` provide support for keyed-archiving. `NSPortCoder` is u distributed objects system to send object proxies across a connection. For more information, see the cla for these five classes, the protocol reference for the `NSCoding` protocol, and Chapter 2 .

```
@interface NSCoder : NSObject
 // Accessor Methods
   - (void)setObjectZone:(NSZone *)zone;
   - (NSZone *)objectZone;
 // Instance Methods
   - (BOOL)allowsKeyedCoding;
   - (void)decodeArrayOfObjCType:(const char *)itemType count:(unsigned)count at:(void
   - (BOOL)decodeBoolForKey:(NSString *)key;
   - (const uint8_t *) decodeBytesForKey:(NSString *)key returnedLength:(unsigned *)len
   - (void *)decodeBytesWithReturnedLength:(unsigned *)lengthp;
   - (NSData *)decodeDataObject;
   - (double)decodeDoubleForKey:(NSString *)key;
   - (float)decodeFloatForKey:(NSString *)key;
   - (int32_t)decodeInt32ForKey :(NSString *)key;
   - (int64_t)decodeInt64ForKey :(NSString *)key;
   - (int)decodeIntForKey:(NSString *)key;
   - (NSColor *)decodeNXColor;
   - (id)decodeNXObject;
   - (id)decodeObject;
   - (id)decodeObjectForKey:(NSString *)key;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSPoint)decodePoint;
- (NSPoint)decodePointForKey:(NSString *)key;
- (id)decodePropertyList;
- (NSRect)decodeRect;
- (NSRect)decodeRectForKey:(NSString *)key;
- (NSSize)decodeSize;
- (NSSize)decodeSizeForKey:(NSString *)key;
- (void)decodeValueOfObjCType:(const char *)type at:(void *)data;
- (void)decodeValuesOfObjCTypes:(const char *)types, ...;
- (void)encodeArrayOfObjCType:(const char *)type  count:(unsigned)count at:(const v
- (void)encodeBool:(BOOL)boolv forKey:(NSString *)key;
- (void)encodeBycopyObject:(id)anObject;
- (void)encodeByrefObject:(id)anObject;
- (void)encodeBytes:(const uint8_t *)bytesp length:(unsigned)lenv forKey:(NSString
- (void)encodeBytes:(const void *)byteaddr length:(unsigned)length;
- (void)encodeConditionalObject:(id)object;
- (void)encodeConditionalObject:(id)objv forKey:(NSString *)key;
- (void)encodeDataObject:(NSData *)data;
- (void)encodeDouble:(double)realv forKey:(NSString *)key;
- (void)encodeFloat:(float)realv forKey:(NSString *)key;
- (void)encodeInt32:(int32_t)intv forKey:(NSString *)key;
- (void)encodeInt64:(int64_t)intv forKey:(NSString *)key;
- (void)encodeInt:(int)intv forKey:(NSString *)key;
- (void)encodeNXObject:(id)object;
- (void)encodeObject:(id)object;
- (void)encodeObject:(id)objv forKey:(NSString *)key;
- (void)encodePoint:(NSPoint)point;
- (void)encodePoint:(NSPoint)point forKey:(NSString *)key;
- (void)encodePropertyList:(id)aPropertyList;
- (void)encodeRect:(NSRect)rect;
- (void)encodeRect:(NSRect)rect forKey:(NSString *)key;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)encodeRootObject:(id)rootObject;
- (void)encodeSize:(NSSize)size;
- (void)encodeSize:(NSSize)size forKey:(NSString *)key;
- (void)encodeValueOfObjCType:(const char *)type at:(const void *)addr;
- (void)encodeValuesOfObjCTypes:(const char *)types, ...;
- (BOOL)containsValueForKey:(NSString *)key;
- (unsigned)systemVersion;
- (unsigned)versionForClassName:(NSString *)className;
```

## Subclasses

NSArchiver , NSKeyedArchiver , NSKeyedUnarchiver , NSPortCoder , NSUnarchiver

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSConditionLock — Mac OS X 10.0

NSConditionLock is a class that implements the NSLocking protocol and is used to perform thread locks that are associated with specific, user-defined conditions. The idea behind NSConditionLock is that a thread can acquire a lock only if some arbitrary condition has been satisfied. See Chapter 2.

```
@interface NSConditionLock : NSObject <NSLocking>
// Initializers
  - (id)initWithCondition:(int)condition;
// Instance Methods
  - (int)condition;
  - (BOOL)lockBeforeDate:(NSDate *)limit;
  - (void)lockWhenCondition:(int)condition;
  - (BOOL)lockWhenCondition:(int)condition beforeDate:(NSDate *)limit;
  - (BOOL)tryLock;
  - (BOOL)tryLockWhenCondition:(int)condition;
  - (void)unlockWithCondition:(int)condition;
// Methods Implementing NSLocking
  - (void)lock;
  - (void)unlock;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# NSConnection

Mac OS X 10.0

This class declares the interface to objects that manage communications between objects that reside in
NSConnection class forms the groundwork for Cocoa's distributed objects system, which is described in
NSConnection supports inter-process communication on the local host, as well as between two hosts ov
frequently used to facilitate communication between threads in a multithreaded application. Clients use
primarily for vending objects (making them available to other processes), accessing vended objects, anc
parameters.

```
@interface NSConnection : NSObject
// Convenience Constructors
  + (NSConnection *)connectionWithReceivePort:(NSPort *)receivePort sendPort:(NSPort *
  + (NSConnection *)connectionWithRegisteredName:(NSString *)name host:(NSString *)hos
  + (NSConnection *)connectionWithRegisteredName:(NSString *)name host:(NSString *)hos
      usingNameServer:(NSPortNameServer *)server;
// Initializers
  - (id)initWithReceivePort:(NSPort *)receivePort sendPort:(NSPort *)sendPort;
// Accessor Methods
  - (void)setRequestTimeout:(NSTimeInterval)ti;
  - (NSTimeInterval)requestTimeout;
  - (void)setReplyTimeout:(NSTimeInterval)ti;
  - (NSTimeInterval)replyTimeout;
  - (void)setRootObject:(id)anObject;
  - (id)rootObject;
  - (void)setDelegate:(id)anObject;
  - (id)delegate;
  - (void)setIndependentConversationQueueing:(BOOL)yorn;
  - (BOOL)independentConversationQueueing;
// Class Methods
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSArray *)allConnections;
+ (id)currentConversation;
+ (NSConnection *)defaultConnection;
+ (NSDistantObject *)rootProxyForConnectionWithRegisteredName:(NSString *)name host
+ (NSDistantObject *)rootProxyForConnectionWithRegisteredName:(NSString *)name host
    usingNameServer:(NSPortNameServer *)server;
// Instance Methods
- (void)invalidate;
- (void)addRunLoop:(NSRunLoop *)runloop;
- (void)enableMultipleThreads;
- (void)addRequestMode:(NSString *)rmode;
- (BOOL)isValid;
- (NSArray *)localObjects;
- (BOOL)multipleThreadsEnabled;
- (NSPort *)receivePort;
- (BOOL)registerName:(NSString *)name;
- (BOOL)registerName:(NSString *)name withNameServer:(NSPortNameServer *)server;
- (NSArray *)remoteObjects;
- (void)removeRequestMode:(NSString *)rmode;
- (void)removeRunLoop:(NSRunLoop *)runloop;
- (NSArray *)requestModes;
- (NSDistantObject *)rootProxy;
- (void)runInNewThread;
- (NSPort *)sendPort;
- (NSDictionary *)statistics;
// Methods Implemented by the Delegate
- (BOOL)authenticateComponents:(NSArray *)components withData:(NSData *)signature;
- (NSData *)authenticationDataForComponents:(NSArray *)components;
- (BOOL)connection:(NSConnection *)ancestor shouldMakeNewConnection:(NSConnection *)
- (BOOL)connection:(NSConnection *)connection handleRequest:(NSDistantObjectRequest
- (id)createConversationForConnection:(NSConnection *)conn;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)makeNewConnection:(NSConnection *)conn sender:(NSConnection *)ancestor;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSCountCommand — Mac OS X 10.0

Instances of this class serve to count the number ofobjects contained within the container object specified as part of this command. This class is used in Cocoa's implementation of built-in AppleScrip support, and as such clients should not need to access instances of this class directly.

```
@interface NSCountCommand : NSScriptCommand
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSCountedSet* *Mac OS X 10.0*

This class extends the functionality of `NSMutableSet` by associating with each member of the set a count of how many times the object has been added to the set. By keeping a count with each object, `NSCountedSet` essentially removes the restriction that every member of a set must be unique. `NSCountedSet` reimplements several of `NSMutableSet`'s methods to support the object counter. The one new method in `NSCountedSet` is `countForObject:`, which will return the counter value for the specified object. If the object is not a member of the set, this method returns `0`. This count can be viewed as the number of occurences of the object within the set.

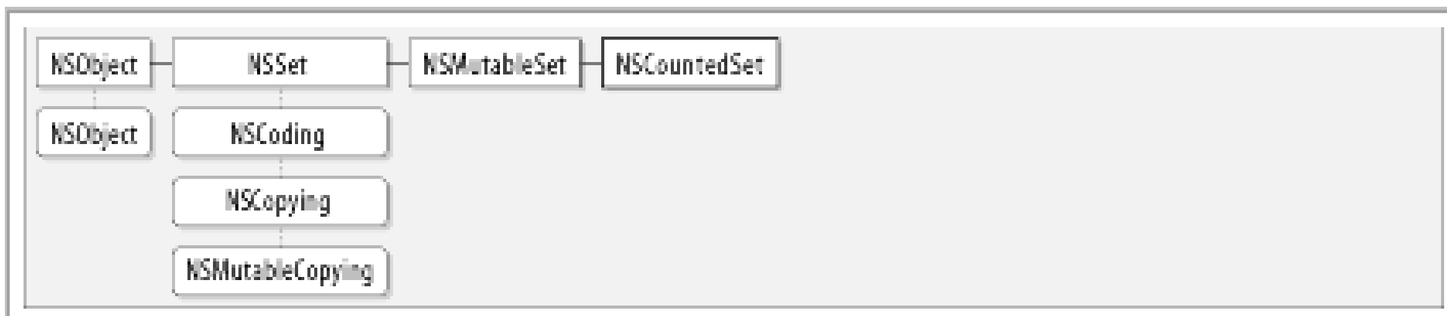


```
@interface NSCountedSet : NSMutableSet
 // Initializers
   - (id)initWithArray:(NSArray *)array;
   - (id)initWithCapacity:(unsigned)numItems;
   - (id)initWithSet:(NSSet *)set;
 // Instance Methods
   - (void)addObject:(id)object;
   - (unsigned)countForObject:(id)object;
   - (NSEnumerator *)objectEnumerator;
   - (void)removeObject:(id)object;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSCreateCommand* *Mac OS X 10.0*

This class provides support for the *Make* AppleScript command, which is used to create new instances of the specified object. This class is used in Cocoa's implementation of built-in AppleScript support, and as such clients should not need to access instances of this class directly.

```
@interface NSCreateCommand : NSScriptCommand
 // Instance Methods
   - (NSScriptClassDescription *)createClassDescription;
   - (NSDictionary *)resolvedKeyDictionary;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSData* *Mac OS X 10.0*

This class is used to store immutable data as a string of bytes. In essence, `NSData` is an Objective-C wra data buffer. To access the buffer directly, use the `bytes` method, which returns a pointer to the buffer. T bytes contained in the buffer is found by invoking the `length` method. Additionally, `NSData` provides a ha methods for copy bytes from the data object into a buffer. These methods include `getBytes` :, `getBytes` `getBytes:range` :. All three of these methods take in the first parameter a generic C pointer to the buff bytes are copied.

`NSData` is toll-free bridged with the Core Foundation type `CFData` . As such, `NSData` objects can be used i with the `CFData` pointer type, `CFDataRef` .

Note that `NSData` is an immutable class, which means the contents of the data object cannot be change initialization.

```
@interface NSData : NSObject <NSCoding, NSCopying, NSMutableCopying>
 // Convenience Constructors
   + (id)data;
   + (id)dataWithBytes:(const void *)bytes length:(unsigned)length;
   + (id)dataWithBytesNoCopy:(void *)bytes length:(unsigned)length;
   + (id)dataWithBytesNoCopy:(void *)bytes length:(unsigned)length freeWhenDone:(BOOL)
   + (id)dataWithContentsOfFile:(NSString *)path;
   + (id)dataWithContentsOfMappedFile:(NSString *)path;
   + (id)dataWithContentsOfURL:(NSURL *)url;
   + (id)dataWithData:(NSData *)data;
 // Initializers
   - (id)initWithBytes:(const void *)bytes length:(unsigned)length;
   - (id)initWithBytesNoCopy:(void *)bytes length:(unsigned)length;
   - (id)initWithBytesNoCopy:(void *)bytes length:(unsigned)length freeWhenDone:(BOOL)
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id)initWithContentsOfFile:(NSString *)path;
- (id)initWithContentsOfMappedFile:(NSString *)path;
- (id)initWithContentsOfURL:(NSURL *)url;
- (id)initWithData:(NSData *)data;
// Instance Methods
- (const void *)bytes;
- (NSString *)description;
- (unsigned)deserializeAlignedBytesLengthAtCursor:(unsigned *)cursor;
- (void)deserializeBytes:(void *)buffer length:(unsigned)bytes atCursor:(unsigned *
- (void)deserializeDataAt:(void *)data ofObjCType:(const char *)type atCursor:(unsig
    context:(id <NSObjCTypeSerializationCallBack>)callback;
- (int)deserializeIntAtCursor:(unsigned *)cursor;
- (int)deserializeIntAtIndex:(unsigned)index;
- (void)deserializeInts:(int *)intBuffer count:(unsigned)numInts atCursor:(unsigned
- (void)deserializeInts:(int *)intBuffer count:(unsigned)numInts atIndex:(unsigned).
- (void)getBytes:(void *)buffer;
- (void)getBytes:(void *)buffer length:(unsigned)length;
- (void)getBytes:(void *)buffer range:(NSRange)range;
- (BOOL)isEqualToData:(NSData *)other;
- (unsigned)length;
- (NSData *)subdataWithRange:(NSRange)range;
- (BOOL)writeToFile:(NSString *)path atomically:(BOOL)useAuxiliaryFile;
- (BOOL)writeToURL:(NSURL *)url atomically:(BOOL)atomically;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implementing NSMutableCopying
- (id)mutableCopyWithZone:(NSZone *)zone;
```

## Subclasses

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSMutableData

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# NSDate

Mac OS X 10.0

This class represents a date and time as the number of seconds since the absolute reference date, which midnight, January 1, 2001, GMT. This class allows you to compare dates, compute time intervals betwee obtain string representations of the `NSDate` object. The dates represented by `NSDate` are not suitable for to human users. `NSDateFormatter` objects are used by `NSCell` objects to convert raw dates into human representations. If your application requires the ability to work with date information in terms of a calen days, weeks, months, years, and so on-the Foundation framework provides the `NSDate` subclass `NSCale`

`NSDate` is toll-free bridged with the Core Foundation type `CFDate` . As such, `NSDate` objects can be used i with the `CFDate` pointer type, `CFDateRef` .

See the `NSCalendarDate` class description for more information. Additionally, Chapter 2provides more de information on the use of `NSDate` .

```
@interface NSDate : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (id)date;
   + (id)dateWithString:(NSString *)aString;
   + (id)dateWithTimeIntervalSince1970 :(NSTimeInterval)secs;
   + (id)dateWithTimeIntervalSinceNow:(NSTimeInterval)secs;
   + (id)dateWithTimeIntervalSinceReferenceDate:(NSTimeInterval)secs;
 // Initializers
   - (id)init;
   - (id)initWithString:(NSString *)description;
   - (id)initWithTimeInterval:(NSTimeInterval)secsToBeAdded  sinceDate:(NSDate *)anoth
   - (id)initWithTimeIntervalSinceNow:(NSTimeInterval)secsToBeAddedToNow;
   - (id)initWithTimeIntervalSinceReferenceDate:(NSTimeInterval)secsToBeAdded;
 // Class Methods
   + (id)distantFuture;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (id)distantPast;
+ (id) dateWithNaturalLanguageString:(NSString *)string;
+ (id) dateWithNaturalLanguageString:(NSString *)string locale:(NSDictionary *)dict;
+ (NSTimeInterval)timeIntervalSinceReferenceDate;
// Instance Methods
- (id)addTimeInterval:(NSTimeInterval)seconds;
- (NSComparisonResult)compare:(NSDate *)other;
- (NSCalendarDate *)dateWithCalendarFormat:(NSString *)format timeZone:(NSTimeZone *
- (NSString *)description;
- (NSString *)descriptionWithCalendarFormat:(NSString *)format timeZone:(NSTimeZone
    locale:(NSDictionary *)locale;
- (NSString *)descriptionWithLocale:(NSDictionary *)locale;
- (NSDate *)earlierDate:(NSDate *)anotherDate;
- (BOOL)isEqualToDate:(NSDate *)otherDate;
- (NSDate *)laterDate:(NSDate *)anotherDate;
- (NSTimeInterval)timeIntervalSince1970 ;
- (NSTimeInterval)timeIntervalSinceDate:(NSDate *)anotherDate;
- (NSTimeInterval)timeIntervalSinceNow;
- (NSTimeInterval)timeIntervalSinceReferenceDate;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

## Subclasses

NSCalendarDate

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSDateFormatter* *Mac OS X 10.0*

This class is used to convert `NSDate` values into a human-readable date and time string, as well as to convert textual date and time representations into `NSDate` objects. `NSDateFormatter` is quite flexible in terms of the variety of supported textual representations, including such standards as 1/1/02, January 1, 2002, and natural language expressions such as "Today" or "Tomorrow". `NSDateFormatter` is used primarily by `NSTextFieldCell` instances to present date information to the user in an appropriate format.

```
@interface NSDateFormatter : NSFormatter
 // Initializers
   - (id)initWithDateFormat:(NSString *)format allowNaturalLanguage:(BOOL)flag;
 // Instance Methods
   - (BOOL)allowsNaturalLanguage;
   - (NSString *)dateFormat;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSDecimalNumber* *Mac OS X 10.0*

This subclass of `NSNumber` provides an object-oriented wrapper for performing base-10 arithmetic operat `NSDecimalNumber` are created with a string such as "10.2e4" using `decimalNumberWithString` :, or by s mantissa, exponent, and whether or not it is negative in the method `decimalNumberWith-Mantissa:exp` :.

Arithmetic operations are performed on two decimal number objects using methods such as `decimalNuml` `decimalNumberByMultiplying` :, and so forth. The value of the decimal number can be accessed as adc `doubleValue` message to the object.

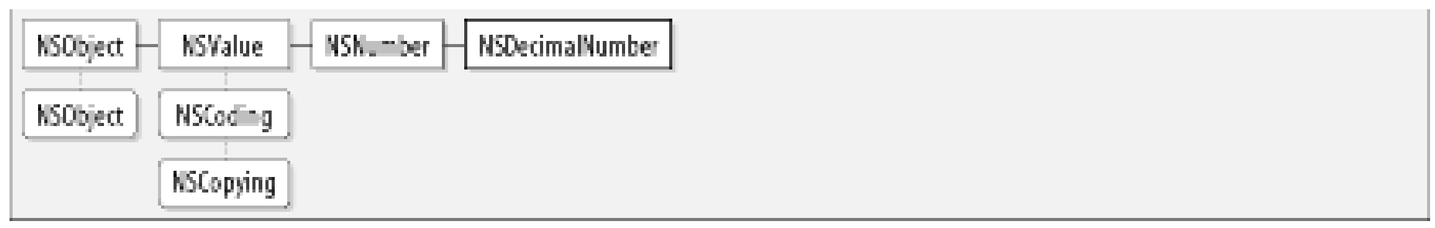


```
@interface NSDecimalNumber : NSNumber
 // Initializers
   - (id)initWithDecimal:(NSDecimal)dcm;
   - (id)initWithMantissa:(unsigned long long)mantissa exponent:(short)exponent isNega
   - (id)initWithString:(NSString *)numberValue;
   - (id)initWithString:(NSString *)numberValue locale:(NSDictionary *)locale;
 // Class Methods
   + (NSDecimalNumber *)decimalNumberWithDecimal:(NSDecimal)dcm;
   + (NSDecimalNumber *)decimalNumberWithMantissa:(unsigned long long)mantissa
       exponent:(short)exponent isNegative:(BOOL)flag;
   + (NSDecimalNumber *)decimalNumberWithString:(NSString *)numberValue;
   + (NSDecimalNumber *)decimalNumberWithString:(NSString *)numberValue locale:(NSDicti
   + (id <NSDecimalNumberBehaviors>)defaultBehavior;
   + (NSDecimalNumber *)maximumDecimalNumber;
   + (NSDecimalNumber *)minimumDecimalNumber;
   + (NSDecimalNumber *)notANumber;
   + (NSDecimalNumber *)one;
   + (void)setDefaultBehavior:(id <NSDecimalNumberBehaviors>)behavior;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSDecimalNumber *)zero;
// Instance Methods
- (NSComparisonResult)compare:(NSNumber *)decimalNumber;
- (NSDecimalNumber *)decimalNumberByAdding:(NSDecimalNumber *)decimalNumber;
- (NSDecimalNumber *)decimalNumberByAdding:(NSDecimalNumber *)decimalNumber
    withBehavior:(id <NSDecimalNumberBehaviors>)behavior;
- (NSDecimalNumber *)decimalNumberByDividingBy:(NSDecimalNumber *)decimalNumber;
- (NSDecimalNumber *)decimalNumberByDividingBy:(NSDecimalNumber *)decimalNumber
    withBehavior:(id <NSDecimalNumberBehaviors>)behavior;
- (NSDecimalNumber *)decimalNumberByMultiplyingBy:(NSDecimalNumber *)decimalNumber;
- (NSDecimalNumber *)decimalNumberByMultiplyingBy:(NSDecimalNumber *)decimalNumber
    withBehavior:(id <NSDecimalNumberBehaviors>)behavior;
- (NSDecimalNumber *)decimalNumberByMultiplyingByPowerOf10 :(short)power;
- (NSDecimalNumber *)decimalNumberByMultiplyingByPowerOf10 :(short)power
    withBehavior:(id <NSDecimalNumberBehaviors>)behavior;
- (NSDecimalNumber *)decimalNumberByRaisingToPower:(unsigned)power;
- (NSDecimalNumber *)decimalNumberByRaisingToPower:(unsigned)power
  withBehavior:(id <NSDecimalNumberBehaviors>)behavior;
- (NSDecimalNumber *)decimalNumberByRoundingAccordingToBehavior:
    (id <NSDecimalNumberBehaviors>)behavior;
- (NSDecimalNumber *)decimalNumberBySubtracting:(NSDecimalNumber *)decimalNumber;
- (NSDecimalNumber *)decimalNumberBySubtracting:(NSDecimalNumber *)decimalNumber
    withBehavior:(id <NSDecimalNumberBehaviors>)behavior;
- (NSDecimal)decimalValue;
- (NSString *)descriptionWithLocale:(NSDictionary *)locale;
- (double)doubleValue;
- (const char *)objCType;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSDecimalNumberHandler* *Mac OS X 10.0*

This class is used to customize the behavior of `NSDecimalNumber` -based arithmetic without having to su `NSDecimalNumber` Handler allows clients to specify how `NSDecimalNumber` objects should handle roundin

```
@interface NSDecimalNumberHandler : NSObject <NSCoding, NSDecimalNumberBehaviors>
 // Initializers
   - (id)initWithRoundingMode:(NSRoundingMode)roundingMode scale:(short)scale raiseOnE
       raiseOnOverflow:(BOOL)overflow raiseOnUnderflow:(BOOL)underflow raiseOnDivideB
 // Class Methods
   + (id)decimalNumberHandlerWithRoundingMode:(NSRoundingMode)roundingMode
       scale:(short)scale raiseOnExactness:(BOOL)exact raiseOnOverflow:(BOOL)overflow
       raiseOnUnderflow:(BOOL)underflow raiseOnDivideByZero:(BOOL)divideByZero;
   + (id)defaultDecimalNumberHandler;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
 // Methods Implementing NSDecimalNumberBehaviors
   - (NSRoundingMode)roundingMode;
   - (short)scale;
   - (NSDecimalNumber *)exceptionDuringOperation:(SEL)operation error:(NSCalculationEr
       leftOperand:(NSDecimalNumber *)leftOperand rightOperand:(NSDecimalNumber *)rig
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSDeleteCommand — Mac OS X 10.0

Instances of this class delete the indicated object or objects. This class is used in Cocoa's implementation of built-in AppleScript support, and as such clients should not need to access instances of this class directly.

```
@interface NSDeleteCommand : NSScriptCommand
 // Accessor Methods
   - (void)setReceiversSpecifier:(NSScriptObjectSpecifier *)receiversRef;
 // Instance Methods
   - (NSScriptObjectSpecifier *)keySpecifier;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSDeserializer* *Mac OS X 10.0*

This class provides an interface to objects that convert property list-formatted data into a structure ofpr
Note that this class has been deprecated and clients should instead use the classNSPropertyListSerial

```
@interface NSDeserializer : NSObject
```

```
// Class Methods
```

```
+ (id)deserializePropertyListFromData:(NSData *)data atCursor:(unsigned *)cursor mu
```

```
+ (id)deserializePropertyListFromData:(NSData *)serialization mutableContainers:(BO
```

```
+ (id)deserializePropertyListLazilyFromData:(NSData *)data atCursor:(unsigned *)curs
    mutableContainers:(BOOL)mut;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSDictionary* *Mac OS X 10.0*

This class manages a collection of objects as key-value pairs: objects are identified by a unique key within the dictionary. A key-value pair within a dictionary is called an entry. `NSDictionary` is an immutable class whose contents cannot be altered after they have been initially set. If you need a mutable dictionary, use `NSMutableDictionary` instead. A dictionary key is typically an `NSString` , but according to the API the key can be any object that is type `id` . The fact that a key can be an object of any type opens the way for interesting design possibilities in Cocoa.

`NSDictionary` has three primitive methods upon which the rest of the API is based. They are `count` , `objectForKey` :, and `keyEnumerator` . The `count` method returns the number of objects contained in th dictionary. The method `objectForKey` : is used to access an object in the dictionary. Finally, `keyEnumerator` will return an `NSEnumerator` object that will enumerate the keys of the dictionary. In addition to `keyEnumerator` , `NSDictionary` responds to `objectEnumerator` for enumerating the content of the dictionary. Note that there is no order in a dictionary as there is in an array. When enumerating the contents of a dictionary, there is no guarantee regarding the order that member objects will be returned by the enumerator.

Often we want to send a message to each member of a collection. `NSDictionary` provides a method that save us from the burden of having to enumerate the contents of the dictionary and send the message manually. This method is `makeObjectsPerformSelector` :, which will cause the method matching the selector to be invoked in each member of the collection. If you need to invoke a method that takes an argument, then use the method `makeObjectsPerformSelector:withObject` :.

`NSDictionary` is toll-free bridged with the Core Foundation type `CFDictionary` . As such, `NSDictionary` objects can be used interchangeably with the `CFDictionary` pointer type, `CFDictionaryRef` .

```
@interface NSDictionary : NSObject <NSCoding, NSCopying, NSMutableCopying>
 // Convenience Constructors
   + (id)dictionary;
   + (id)dictionaryWithContentsOfFile:(NSString *)path;
   + (id)dictionaryWithContentsOfURL:(NSURL *)url;
   + (id)dictionaryWithDictionary:(NSDictionary *)dict;
   + (id)dictionaryWithObject:(id)object forKey:(id)key;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (id)dictionaryWithObjects:(NSArray *)objects forKeys:(NSArray *)keys;
+ (id)dictionaryWithObjects:(id *)objects forKeys:(id *)keys count:(unsigned)count;
+ (id)dictionaryWithObjectsAndKeys:(id)firstObject, ...;
// Initializers
- (id)initWithContentsOfFile:(NSString *)path;
- (id)initWithContentsOfURL:(NSURL *)url;
- (id)initWithDictionary:(NSDictionary *)otherDictionary;
- (id)initWithDictionary:(NSDictionary *)otherDictionary copyItems:(BOOL)aBool;
- (id)initWithObjects:(NSArray *)objects forKeys:(NSArray *)keys;
- (id)initWithObjects:(id *)objects forKeys:(id *)keys count:(unsigned)count;
- (id)initWithObjectsAndKeys:(id)firstObject, ...;
// Instance Methods
- (NSArray *)allKeys;
- (NSArray *)allKeysForObject:(id)anObject;
- (NSArray *)allValues;
- (unsigned)count;
- (NSString *)description;
- (NSString *)descriptionInStringsFileFormat;
- (NSString *)descriptionWithLocale:(NSDictionary *)locale;
- (NSString *)descriptionWithLocale:(NSDictionary *)locale indent:(unsigned)level;
- (NSDate *)fileCreationDate;
- (BOOL)fileExtensionHidden;
- (NSNumber *)fileGroupOwnerAccountID;
- (NSString *)fileGroupOwnerAccountName;
- (OSType)fileHFSCreatorCode;
- (OSType)fileHFSTypeCode;
- (BOOL)fileIsAppendOnly;
- (BOOL)fileIsImmutable;
- (NSDate *)fileModificationDate;
- (NSNumber *)fileOwnerAccountID;
- (NSString *)fileOwnerAccountName;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (unsigned long)filePosixPermissions;
- (unsigned long long)fileSize;
- (unsigned long)fileSystemFileNumber;
- (unsigned long)fileSystemNumber;
- (NSString *)fileType;
- (BOOL)isEqualToDictionary:(NSDictionary *)otherDictionary;
- (NSEnumerator *)keyEnumerator;
- (NSArray *)keysSortedByValueUsingSelector:(SEL)comparator;
- (NSEnumerator *)objectEnumerator;
- (id)objectForKey:(id)aKey;
- (NSArray *)objectsForKeys:(NSArray *)keys notFoundMarker:(id)marker;
- (BOOL)writeToFile:(NSString *)path atomically:(BOOL)useAuxiliaryFile;
- (BOOL)writeToURL:(NSURL *)url atomically:(BOOL)atomically;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implementing NSMutableCopying
- (id)mutableCopyWithZone:(NSZone *)zone;
```

## Subclasses

NSMutableDictionary

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSDirectoryEnumerator — Mac OS X 10.0

This subclass of `NSEnumerator` enumerates the contents of a directory at a specified path. The objects returned by the directory enumerator are strings of the pathnames of all files and subdirectories contained within the directory represented by the enumerator. Enumeration is recursive; that is, the contents of a child directory will be enumerated when encountered. Instances of this class are returned by the `NSFileManager` method `enumeratorAtPath:`.

```
@interface NSDirectoryEnumerator : NSEnumerator
 // Instance Methods
   - (NSDictionary *)directoryAttributes;
   - (NSDictionary *)fileAttributes;
   - (void)skipDescendents;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSDistantObject* *Mac OS X 10.0*

This subclass of `NSProxy` is used in distributed objects applications to locally represent objects that have been vended by a remote process. `NSDistantObject` operates by forwarding any messages it receives t the local `NSConnection` object, which then passes the invocation to the `NSConnection` object of the remo process. Return values received by the `NSConnection` object are passed to the message originator throu the same instance of `NSDistantObject` that forwarded the message.

```
@interface NSDistantObject : NSProxy <NSCoding>
// Initializers
  - (id)initWithLocal:(id)target connection:(NSConnection *)connection;
  - (id)initWithTarget:(id)target connection:(NSConnection *)connection;
// Accessor Methods
  - (void)setProtocolForProxy:(Protocol *)proto;
// Class Methods
  + (NSDistantObject *)proxyWithLocal:(id)target connection:(NSConnection *)connectior
  + (NSDistantObject *)proxyWithTarget:(id)target connection:(NSConnection *)connectic
// Instance Methods
  - (NSConnection *)connectionForProxy;
// Methods Implementing NSCoding
  - (void)encodeWithCoder:(NSCoder *)aCoder;
  - (id)initWithCoder:(NSCoder *)aDecoder;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSDistantObjectRequest — Mac OS X 10.0

This class is used by the distributed objects system to assist handling invocations between objects that reside in different processes. This class is used internally by the distributed objects system, and as such clients should never need to access instances of this class. If a client needs to process events handled by an `NSConnection` object, they may implement the `NSConnection` delegate method `connection:handleRequest:`.

```
@interface NSDistantObjectRequest : NSObject
 // Instance Methods
   - (NSConnection *)connection;
   - (id)conversation;
   - (NSInvocation *)invocation;
   - (void)replyWithException:(NSException *)exception;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSDistributedLock* *Mac OS X 10.0*

This class provides an interface to an object that can be used by multiple applications to control access to a shared resource (such as a file). This class works by creating an entry in the filesystem a a path known to each application that is interested in acquiring a lock to access the shared resource.

A distributed lock object is initialized with a filesystem entry using the method `initWithPath:`. To acquire a lock, thus making it safe to access a resource, we use the method `tryLock`. This method returns a `BOOL` indicating whether or not it was successful in attempting to acquire a lock. To relinquish a previously acquired lock, use the method `unlock`.

```
@interface NSDistributedLock : NSObject
 // Initializers
   - (id)initWithPath:(NSString *)path;
 // Class Methods
   + (NSDistributedLock *)lockWithPath:(NSString *)path;
 // Instance Methods
   - (void)breakLock;
   - (NSDate *)lockDate;
   - (BOOL)tryLock;
   - (void)unlock;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSDistributedNotificationCenter* *Mac OS X 10.0*

This class extends the functionality of its superclass, `NSNotificationCenter` , by providing a means of s other tasks. Every task has a default distributed notification center that objects send notifications to, as observers. To obtain your application's distributed notification center object, use the factory method `defa`

To `register` an object as a receiver of a specified notification we use the method `addObserver:selecto` is the object that wishes to be notified of the notification identified by `name` :. The argument `selector` : s invoked in response to the notification. The `object` : parameter allows us to restrict the notifications the posted by the specified object. To remove an observer, invoke the method `removeObserver` :, which rem notifications. To be selective about what notifications from which objects to stop observing, use the met `removeObserver:name:object` :.

`NSNotificationCenter` provides three methods for posting notifications: `postNotification` :, `postNot` `postNotification-Name:object:userInfo` :. Each of these methods offers different levels of control o

For more information about the notifications system, see Chapter 2.

```
@interface NSDistributedNotificationCenter : NSNotificationCenter
 // Accessor Methods
   - (void)setSuspended:(BOOL)suspended;
   - (BOOL)suspended;
 // Class Methods
   + (id)defaultCenter;
   + (NSDistributedNotificationCenter *)notificationCenterForType:(NSString *)notifica
 // Instance Methods
   - (void)addObserver:(id)observer selector:(SEL)aSelector name:(NSString *)aName obj
   - (void)addObserver:(id)observer selector:(SEL)selector name:(NSString *)name object
       suspensionBehavior:(NSNotificationSuspensionBehavior)suspensionBehavior;
   - (void)postNotificationName:(NSString *)aName object:(NSString *)anObject;
   - (void)postNotificationName:(NSString *)aName object:(NSString *)anObject userInfo
   - (void)postNotificationName:(NSString *)name object:(NSString *)object userInfo:(N
       deliverImmediately:(BOOL)deliverImmediately;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)removeObserver:(id)observer name:(NSString *)aName
  object:(NSString *)anObject;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSEnumerator — Mac OS X 10.0

This class enumerates the contents of a collection. Instances of this class are created by the collection classes, generally with the method `objectEnumerator`. `NSArray` declares the method `reverseObjectEnumerator`, and `NSDictionary` declares `keyEnumerator` as additional methods that create instances of `NSEnumerator`.

To obtain the next object in an enumerator, we invoke the method `nextObject`. This will return an object, and advance the enumerator position forward in the collection. When the enumerator has exhausted the collection, `nextObject` returns `nil`. Enumerators cannot be reset; once you have enumerated a collection, you must obtain an new enumerator from the collection to start again. The method `allObjects` is used to return an `NSArray` of the objects that have not yet been enumerated. See Chapter 2 for more information on collections and enumerators.

```
@interface NSEnumerator : NSObject
 // Instance Methods
   - (NSArray *)allObjects;
   - (id)nextObject;
```

### Subclasses

`NSDirectoryEnumerator`



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSException* *Mac OS X 10.0*

This class implements the Foundation framework's exception-handling system. Exceptions are used in Co special conditions in the execution of a program that may require special handling. Clients can use NSExc (creating a special condition), as well as to retrieve information about an exception. For details on excep

```
@interface NSException : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (NSException *)exceptionWithName:(NSString *)name reason:(NSString *)reason userIn
 // Initializers
   - (id)initWithName:(NSString *)aName reason:(NSString *)aReason userInfo:(NSDictiona
 // Class Methods
   + (void)raise:(NSString *)name format:(NSString *)format arguments:(va_list)argList,
   + (void)raise:(NSString *)name format:(NSString *)format, ...;
 // Instance Methods
   - (NSString *)name;
   - (void)raise;
   - (NSString *)reason;
   - (NSDictionary *)userInfo;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
 // Methods Implementing NSCopying
   - (id)copyWithZone:(NSZone *)zone;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSExistsCommand — Mac OS X 10.0

Instances of this class are used to check whether or not the specified object exists. This class is used in Cocoa's implementation of built-in AppleScript support, and as such clients should not need to access instances of this class directly.

```
@interface NSExistsCommand : NSScriptCommand
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSFileHandle

Mac OS X 10.0

This class is used to read and write data to and from an open file or open communications channel, such as a networking socket. The class provides methods for working with files, and contains methods and notifications useful for implementingasynchronous background socket communication.

```
@interface NSFileHandle : NSObject
 // Initializers
   - (id)initWithFileDescriptor:(int)fd;
   - (id)initWithFileDescriptor:(int)fd closeOnDealloc:(BOOL)closeopt;
   - (id)initWithNativeHandle:(void *)nativeHandle;
   - (id)initWithNativeHandle:(void *)nativeHandle closeOnDealloc:(BOOL)closeopt;
 // Class Methods
   + (id)fileHandleForReadingAtPath:(NSString *)path;
   + (id)fileHandleForUpdatingAtPath:(NSString *)path;
   + (id)fileHandleForWritingAtPath:(NSString *)path;
   + (id)fileHandleWithNullDevice;
   + (id)fileHandleWithStandardError;
   + (id)fileHandleWithStandardInput;
   + (id)fileHandleWithStandardOutput;
 // Instance Methods
   - (void)acceptConnectionInBackgroundAndNotify;
   - (void)acceptConnectionInBackgroundAndNotifyForModes:(NSArray *)modes;
   - (NSData *)availableData;
   - (void)closeFile;
   - (int)fileDescriptor;
   - (void *)nativeHandle;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (unsigned long long)**offsetInFile**; |
| - (NSData *)**readDataOfLength**:(unsigned int)*length*; |
| - (NSData *)**readDataToEndOfFile**; |
| - (void)**readInBackgroundAndNotify**; |
| - (void)**readInBackgroundAndNotifyForModes**:(NSArray *)*modes*; |
| - (void)**readToEndOfFileInBackgroundAndNotify**; |
| - (void)**readToEndOfFileInBackgroundAndNotifyForModes**:(NSArray *)*modes*; |
| - (unsigned long long)**seekToEndOfFile**; |
| - (void)**seekToFileOffset**:(unsigned long long)*offset*; |
| - (void)**synchronizeFile**; |
| - (void)**truncateFileAtOffset**:(unsigned long long)*offset*; |
| - (void)**waitForDataInBackgroundAndNotify**; |
| - (void)**waitForDataInBackgroundAndNotifyForModes**:(NSArray *)*modes*; |
| - (void)**writeData**:(NSData *)*data*; |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSFileManager* *Mac OS X 10.0*

This class provides an interface that clients can use to interact with thefilesystem. This provides all of th directory manipulation facilities for copying, moving, changing working directories, and more.

```
@interface NSFileManager : NSObject
 // Class Methods
   + (NSFileManager *)defaultManager;
 // Instance Methods
   - (BOOL)changeCurrentDirectoryPath:(NSString *)path;
   - (BOOL)changeFileAttributes:(NSDictionary *)attributes atPath:(NSString *)path;
   - (NSArray *)componentsToDisplayForPath:(NSString *)path;
   - (NSData *)contentsAtPath:(NSString *)path;
   - (BOOL)contentsEqualAtPath:(NSString *)path1 andPath:(NSString *)path2;
   - (BOOL)copyPath:(NSString *)src toPath:(NSString *)dest  handler:(id)handler;
   - (BOOL)createDirectoryAtPath:(NSString *)path attributes:(NSDictionary *)attributes
   - (BOOL)createFileAtPath:(NSString *)path contents:(NSData *)data attributes:(NSDict
   - (BOOL)createSymbolicLinkAtPath:(NSString *)path pathContent:(NSString *)otherpath,
   - (NSString *)currentDirectoryPath;
   - (NSArray *)directoryContentsAtPath:(NSString *)path;
   - (NSString *)displayNameAtPath:(NSString *)path;
   - (NSDirectoryEnumerator *)enumeratorAtPath:(NSString *)path;
   - (NSDictionary *)fileAttributesAtPath:(NSString *)path traverseLink:(BOOL)yorn;
   - (BOOL)fileExistsAtPath:(NSString *)path;
   - (BOOL)fileExistsAtPath:(NSString *)path isDirectory:(BOOL *)isDirectory;
   - (NSDictionary *)fileSystemAttributesAtPath:(NSString *)path;
   - (const char *)fileSystemRepresentationWithPath:(NSString *)path;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isDeletableFileAtPath:(NSString *)path;
- (BOOL)isExecutableFileAtPath:(NSString *)path;
- (BOOL)isReadableFileAtPath:(NSString *)path;
- (BOOL)isWritableFileAtPath:(NSString *)path;
- (BOOL)linkPath:(NSString *)src toPath:(NSString *)dest handler:(id)handler;
- (BOOL)movePath:(NSString *)src toPath:(NSString *)dest handler:(id)handler;
- (NSString *)pathContentOfSymbolicLinkAtPath:(NSString *)path;
- (BOOL)removeFileAtPath:(NSString *)path handler:(id)handler;
- (NSString *)stringWithFileSystemRepresentation:(const char *)str length:(unsigned
- (NSArray *)subpathsAtPath:(NSString *)path;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSFormatter* *Mac OS X 10.0*

This class declares an abstract interface for objects that an instance of `NSCell` can use to create, interpre representation of the cell's contents that is suited for human readability. The Foundation framework pro that are used to format numeric and time and date values: `NSNumberFormatter` and `NSDateFormatter` .

```
@interface NSFormatter : NSObject <NSCoding, NSCopying>
 // Instance Methods
   - (NSAttributedString *)attributedStringForObjectValue:(id)obj withDefaultAttribute
   - (NSString *)editingStringForObjectValue:(id)obj;
   - (BOOL)getObjectValue:(id *)obj forString:(NSString *)string errorDescription:(NSS
   - (BOOL)isPartialStringValid:(NSString *)partialString newEditingString:(NSString *
       errorDescription:(NSString **)error;
   - (BOOL)isPartialStringValid:(NSString **)partialStringPtr
       proposedSelectedRange:(NSRangePointer)proposedSelRangePtr originalString:(NSSt
       originalSelectedRange:(NSRange)origSelRange errorDescription:(NSString **)erro
   - (NSString *)stringForObjectValue:(id)obj;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
 // Methods Implementing NSCopying
   - (id)copyWithZone:(NSZone *)zone;
```

### Subclasses

`NSDateFormatter` , `NSNumberFormatter`



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSGetCommand Mac OS X 10.0

Instances of this class are used to retrieve a user-specified value from the specified object. This class is used in Cocoa's implementation of built-in AppleScript support, and as such clients should not need to access instances of this class directly.

```
@interface NSGetCommand : NSScriptCommand
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSHost — Mac OS X 10.0

This class is used to perform host name lookup and IP address translation. Translations are provided by any services available to the operating system such as NetInfo, LDAP, or DNS. Instances of `NSHost` are created using one of three class methods: `currentHost`, `hostWithAddress:`, and `hostWithName:`. The first, `currentHost`, returns an `NSHost` object that contains information about the host running the application process. The methods `hostWithName:` and `hostWithAddress:` create `NSHost` objects for the host with the specified name or address. The name used in `hostWithName:` can be a simple host name, or it can be a fully qualified domain name. When creating a host object with `hostWithAddress:`, the IP address is specified as a string in dotted decimal format, such as `192.168.254.198`. Once an instance of `NSHost` has been created, it can be queried for the IP addresses and names that the host identifies with.

```
@interface NSHost : NSObject
 // Convenience Constructors
   + (NSHost *)hostWithAddress:(NSString *)address;
   + (NSHost *)hostWithName:(NSString *)name;
 // Class Methods
   + (NSHost *)currentHost;
   + (void)flushHostCache;
   + (BOOL)isHostCacheEnabled;
   + (void)setHostCacheEnabled:(BOOL)flag;
 // Instance Methods
   - (NSString *)address;
   - (NSArray *)addresses;
   - (BOOL)isEqualToHost:(NSHost *)aHost;
   - (NSString *)name;
   - (NSArray *)names;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSIndexSpecifier* *Mac OS X 10.0*

This class represents the scripting language reference form used to specify an object in a collection acco position in the collection.

```
@interface NSIndexSpecifier : NSScriptObjectSpecifier
```

```
// Initializers
```

```
- (id)initWithContainerClassDescription:(NSScriptClassDescription *)classDesc
    containerSpecifier:(NSScriptObjectSpecifier *)container key:(NSString *)proper
```

```
// Accessor Methods
```

```
- (void)setIndex:(int)index;
```

```
- (int)index;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSInvocation — Mac OS X 10.0

This class encapsulates information about an Objective-C message such as theselector and the target of the message. NSInvocations are useful for statically storing a message and are often used with timers, and for message forwarding.

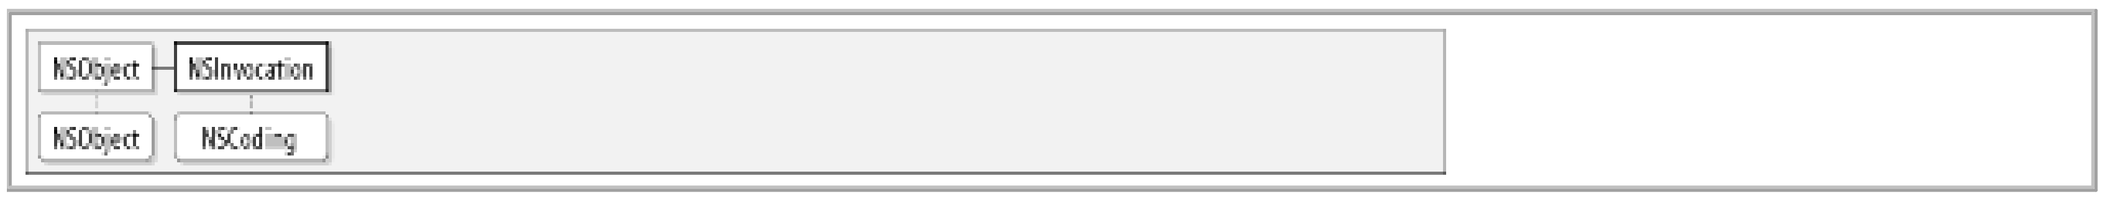


```
@interface NSInvocation : NSObject <NSCoding>
// Convenience Constructors
  + (NSInvocation *)invocationWithMethodSignature:(NSMethodSignature *)sig;
// Accessor Methods
  - (void)setSelector:(SEL)selector;
  - (SEL)selector;
  - (void)setTarget:(id)target;
  - (id)target;
  - (void)setReturnValue:(void *)retLoc;
  - (void)setArgument:(void *)argumentLocation atIndex:(int)index;
// Instance Methods
  - (void)getReturnValue:(void *)retLoc;
  - (void)invoke;
  - (void)getArgument:(void *)argumentLocation atIndex:(int)index;
  - (BOOL)argumentsRetained;
  - (void)invokeWithTarget:(id)target;
  - (NSMethodSignature *)methodSignature;
  - (void)retainArguments;
// Methods Implementing NSCoding
  - (void)encodeWithCoder:(NSCoder *)aCoder;
  - (id)initWithCoder:(NSCoder *)aDecoder;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSKeyedArchiver* *Mac OS X 10.2*

This class is a concrete subclass of `NSCoder` that encodes objects and scalar values into a data format th file. `NSKeyedArchiver` is different from `NSArchiver` in that each object and scalar in the archive has an key. These keys make it possible to decode the archive piecemeal; that is, in an order that is different fr encoding. Clients have the option of picking and choosing which objects to decode. Non-keyed archives limitation that the entirety of an archive must be decoded at once, and in the order that it was encoded. described in greater detail in Chapter 2.

```
@interface NSKeyedArchiver : NSCoder
 // Initializers
   - (id)initForWritingWithMutableData:(NSMutableData *)data;
 // Accessor Methods
   - (void)setDelegate:(id)delegate;
   - (id)delegate;
   - (void)setOutputFormat:(NSPropertyListFormat)format;
   - (NSPropertyListFormat)outputFormat;
   - (void)setClassName:(NSString *)codedName forClass:(Class)cls;
 // Class Methods
   + (BOOL)archiveRootObject:(id)rootObject toFile:(NSString *)path;
   + (NSData *)archivedDataWithRootObject:(id)rootObject;
   + (NSString *)classNameForClass:(Class)cls;
   + (void)setClassName:(NSString *)codedName forClass:(Class)cls;
 // Instance Methods
   - (void)encodeConditionalObject:(id)objv forKey:(NSString *)key;
   - (void)encodeBool:(BOOL)boolv forKey:(NSString *)key;
   - (void)encodeBytes:(const uint8_t *)bytesp length:(unsigned)lenv forKey:(NSString
   - (void)encodeDouble:(double)realv forKey:(NSString *)key;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)encodeFloat:(float)realv forKey:(NSString *)key;
- (void)encodeInt32:(int32_t)intv forKey:(NSString *)key;
- (void)encodeInt64:(int64_t)intv forKey:(NSString *)key;
- (void)encodeInt:(int)intv forKey:(NSString *)key;
- (NSString *)classNameForClass:(Class)cls;
- (void)encodeObject:(id)objv forKey:(NSString *)key;
- (void)finishEncoding;
// Methods Implemented by the Delegate
- (void)archiver:(NSKeyedArchiver *)archiver didEncodeObject:(id)object;
- (id)archiver:(NSKeyedArchiver *)archiver  willEncodeObject:(id)object;
- (void)archiver:(NSKeyedArchiver *)archiver willReplaceObject:(id)object withObjec
- (void)archiverDidFinish:(NSKeyedArchiver *)archiver;
- (void)archiverWillFinish:(NSKeyedArchiver *)archiver;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSKeyedUnarchiver* *Mac OS X 10.2*

This concrete subclass of `NSCoder` provides a means to decode objects that have been encoded in a keye class `NSKeyedArchiver` provides the means to create such keyed archives from a set of objects. Archivi detail in Chapter 2 .

```
@interface NSKeyedUnarchiver : NSCoder
 // Initializers
   - (id)initForReadingWithData:(NSData *)data;
 // Accessor Methods
   - (void)setDelegate:(id)delegate;
   - (id)delegate;
   - (void)setClass:(Class)cls forClassName:(NSString *)codedName;
 // Class Methods
   + (Class)classForClassName:(NSString *)codedName;
   + (void)setClass:(Class)cls forClassName:(NSString *)codedName;
   + (id)unarchiveObjectWithData:(NSData *)data;
   + (id)unarchiveObjectWithFile:(NSString *)path;
 // Instance Methods
   - (int32_t)decodeInt32ForKey:(NSString *)key;
   - (const uint8_t *)decodeBytesForKey:(NSString *)key returnedLength:(unsigned *)len
   - (double)decodeDoubleForKey:(NSString *)key;
   - (Class)classForClassName:(NSString *)codedName;
   - (BOOL)containsValueForKey:(NSString *)key;
   - (BOOL)decodeBoolForKey:(NSString *)key;
   - (float)decodeFloatForKey:(NSString *)key;
   - (int64_t)decodeInt64ForKey:(NSString *)key;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (int)decodeIntForKey:(NSString *)key;
- (id)decodeObjectForKey:(NSString *)key;
- (void)finishDecoding;
// Methods Implemented by the Delegate
- (Class)unarchiver:(NSKeyedUnarchiver *)unarchiver cannotDecodeObjectOfClassName:(N
    originalClasses:(NSArray *)classNames;
- (id)unarchiver:(NSKeyedUnarchiver *)unarchiver didDecodeObject:(id)object;
- (void)unarchiver:(NSKeyedUnarchiver *)unarchiver willReplaceObject:(id)object with
- (void)unarchiverDidFinish:(NSKeyedUnarchiver *)unarchiver;
- (void)unarchiverWillFinish:(NSKeyedUnarchiver *)unarchiver;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSLock* *Mac OS X 10.0*

NSLock implements thread locks that can be used to let multiple threads in an application access the same data without clashing. The use of NSLock, and locking in general, is discussed in detail in Chapter 2.

```
@interface NSLock : NSObject <NSLocking>
 // Instance Methods
   - (BOOL)lockBeforeDate:(NSDate *)limit;
   - (BOOL)tryLock;
 // Methods Implementing NSLocking
   - (void)lock;
   - (void)unlock;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSLogicalTest* *Mac OS X 10.0*

Instances of this class represent logical operations-such as AND, OR, and NOT-on a set of Boolean tests. These Boolean tests are represented by instances of the class `NSSpecifierTest`. Instances of this class are initialized with one of three initializers: `initAndTestWithTests:`, `initOrTestWithTests:`, and `initNotTestWithTest:`. The AND and OR initializers both take an `NSArray` of test objects, while the NOT initializer requires only one test object. When an `NSLogicalTest` object is evaluated (by receiving an `isTrue` message), it sends `isTrue` messages to each of its component test objects, and then evaluate those results based on the type of logical test being performed.

```
@interface NSLogicalTest : NSScriptWhoseTest
 // Initializers
   - (id)initAndTestWithTests:(NSArray *)subTests;
   - (id)initNotTestWithTest:(NSScriptWhoseTest *)subTest;
   - (id)initOrTestWithTests:(NSArray *)subTests;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSMachBootstrapServer* *Mac OS X 10.0*

This subclass of `NSPortNameServer` returns and accepts instances of `NSMachPort`. `NSConnection` objects use port name servers to `register` and discover communication ports that can be used for distributed objects connections. Additional subclasses of`NSPortNameServer` that handle other types of ports are `NSSocketPortNameServer` and `NSMessagePortNameServer`.

```
@interface NSMachBootstrapServer : NSPortNameServer
 // Class Methods
   + (id)sharedInstance;
 // Instance Methods
   - (NSPort *)portForName:(NSString *)name;
   - (NSPort *)portForName:(NSString *)name host:(NSString *)host;
   - (BOOL)registerPort:(NSPort *)port name:(NSString *)name;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSMachPort — Mac OS X 10.0

This subclass of `NSPort` provides an object-oriented wrapper to Mach IPC ports, which can be used either as endpoint for distributed object connections, or for raw messaging. `NSMachPort` objects only support local messaging; `NSSocketPort` provides support for remote messaging over a network.

```
@interface NSMachPort : NSPort
 // Initializers
   - (id)initWithMachPort:(int)machPort;
 // Class Methods
   + (NSPort *)portWithMachPort:(int)machPort;
 // Instance Methods
   - (int)machPort;
   - (void)removeFromRunLoop:(NSRunLoop *)runLoop forMode:(NSString *)mode;
   - (void)scheduleInRunLoop:(NSRunLoop *)runLoop forMode:(NSString *)mode;
// Methods Implemented by the Delegate
   - (void)handleMachMessage:(void *)msg;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSMessagePort* *Mac OS X 10.0*

This subclass of `NSPort` provides an interface to objects that serve as endpoints for distributed objects connections between processes on the same machine. `NSMachPort` provides similar functionality that is implemented using Mach IPC ports, while `NSSocketPort` supports messaging over a network.

```
@interface NSMessagePort : NSPort
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSMessagePortNameServer* *Mac OS X 10.0*

This subclass of `NSPortNameServer` accepts and returns instances of `NSMessagePort`. `NSConnection` objects use port name servers to `register` and discover communication ports that can be used for distributed objects connections. Additional subclasses of`NSPortNameServer` that handle other types of ports are `NSMachBootstrapServer` and `NSSocketPortNameServer`.

```
@interface NSMessagePortNameServer : NSPortNameServer
 // Class Methods
   + (id)sharedInstance;
 // Instance Methods
   - (NSPort *)portForName:(NSString *)name;
   - (NSPort *)portForName:(NSString *)name
     host:(NSString *)host;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSMethodSignature — Mac OS X 10.0

This class provides an interface used to query information about amethod including such characteristics as the number and types of arguments, and the return type. Instances of `NSMethodSignature` are created using `NSObject`'s `methodSignature-ForSelector`: method.

```
@interface NSMethodSignature : NSObject
 // Instance Methods
   - (unsigned)frameLength;
   - (const char *)getArgumentTypeAtIndex:(unsigned)index;
   - (BOOL)isOneway;
   - (unsigned)methodReturnLength;
   - (const char *)methodReturnType;
   - (unsigned)numberOfArguments;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSMiddleSpecifier — Mac OS X 10.0

This class represents the scripting language reference form used to specify the object that lies in the middle of a collection of objects.

```
@interface NSMiddleSpecifier : NSScriptObjectSpecifier
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSMoveCommand — Mac OS X 10.0

Instances of this class represent move operations and, when executed, perform such operations on the specified objects.

```
@interface NSMoveCommand : NSScriptCommand
 // Accessor Methods
   - (void)setReceiversSpecifier:(NSScriptObjectSpecifier *)receiversRef;
 // Instance Methods
   - (NSScriptObjectSpecifier *)keySpecifier;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# *NSMutableArray* *Mac OS X 10.0*

This class extends the API of `NSArray` to allow for mutable, ordered collections of objects. `NSMutableArr` provides five primitive methods, which form the basis for the rest of its methods: `addObject:`, `insertObject:atIndex:`, `removeLastObject`, `removeObjectAtIndex:`, and `replaceObjectAtIndex:withObject:`. When an object is added to an array, the array asserts some ownership over the object by sending it a `retain` message. Likewise, when an object is removed from a array, it is sent a `release` message by the array.

`NSMutableArray` is toll-free bridged with the Core Foundation type `CFArray`. As such, `NSMutableArray` can be used interchangeably with the `CFArray` pointer type, `CFArrayRef`.

```
@interface NSMutableArray : NSArray
 // Initializers
   - (id)initWithCapacity:(unsigned)numItems;
 // Accessor Methods
   - (void)setArray:(NSArray *)otherArray;
 // Class Methods
   + (id)arrayWithCapacity:(unsigned)numItems;
 // Instance Methods
   - (void)addObject:(id)anObject;
   - (void)addObjectsFromArray:(NSArray *)otherArray;
   - (void)exchangeObjectAtIndex:(unsigned)idx1 withObjectAtIndex:(unsigned)idx2;
   - (void)insertObject:(id)anObject atIndex:(unsigned)index;
   - (void)removeAllObjects;
   - (void)removeLastObject;
   - (void)removeObject:(id)anObject;
   - (void)removeObject:(id)anObject inRange:(NSRange)range;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)removeObjectAtIndex:(unsigned)index;
- (void)removeObjectIdenticalTo:(id)anObject;
- (void)removeObjectIdenticalTo:(id)anObject inRange:(NSRange)range;
- (void)removeObjectsFromIndices:(unsigned *)indices numIndices:(unsigned)count;
- (void)removeObjectsInArray:(NSArray *)otherArray;
- (void)removeObjectsInRange:(NSRange)range;
- (void)replaceObjectAtIndex:(unsigned)index withObject:(id)anObject;
- (void)replaceObjectsInRange:(NSRange)range withObjectsFromArray:(NSArray *)otherA
- (void)replaceObjectsInRange:(NSRange)range withObjectsFromArray:(NSArray *)otherA
    range:(NSRange)otherRange;
- (void)sortUsingFunction:(int (*)(id, id, void *))compare
  context:(void *)context;
- (void)sortUsingSelector:(SEL)comparator;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSMutableAttributedString* *Mac OS X 10.0*

`NSMutableAttributedString` is a subclass of `NSAttributedString` that allows the contents and attribu altered after the object has been initialized, which is normally not possible with its immutable superclass

```
@interface NSMutableAttributedString : NSAttributedString
 // Accessor Methods
   - (void)setAttributes:(NSDictionary *)attrs range:(NSRange)range;
   - (void)setAlignment:(NSTextAlignment)alignment range:(NSRange)range;
   - (void)setAttributedString:(NSAttributedString *)attrString;
 // Instance Methods
   - (void)appendAttributedString:(NSAttributedString *)attrString;
   - (void)addAttribute:(NSString *)name value:(id)value range:(NSRange)range;
   - (void)addAttributes:(NSDictionary *)attrs range:(NSRange)range;
   - (void)applyFontTraits:(NSFontTraitMask)traitMask range:(NSRange)range;
   - (void)beginEditing;
   - (void)deleteCharactersInRange:(NSRange)range;
   - (void)endEditing;
   - (void)fixAttachmentAttributeInRange:(NSRange)range;
   - (void)fixAttributesInRange:(NSRange)range;
   - (void)fixFontAttributeInRange:(NSRange)range;
   - (void)fixParagraphStyleAttributeInRange:(NSRange)range;
   - (void)insertAttributedString:(NSAttributedString *)attrString atIndex:(unsigned)lo
   - (NSMutableString *)mutableString;
   - (BOOL)readFromURL:(NSURL *)url options:(NSDictionary *)options documentAttributes
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)removeAttribute:(NSString *)name range:(NSRange)range;
- (void)replaceCharactersInRange:(NSRange)range withAttributedString:(NSAttributedSt
- (void)replaceCharactersInRange:(NSRange)range withString:(NSString *)str;
- (void)subscriptRange:(NSRange)range;
- (void)superscriptRange:(NSRange)range;
- (void)unscriptRange:(NSRange)range;
- (void)updateAttachmentsFromPath:(NSString *)path;
```

## Subclasses

NSTextStorage

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSMutableCharacterSet — Mac OS X 10.0

This class extends the interface of `NSCharacterSet` to allow clients to modify the contents of the character set after it has been initialized. Clients may add and remove characters specified in a string or numeric range, and new sets may be created from the `union` or intersection of two existing sets.

```
@interface NSMutableCharacterSet : NSCharacterSet <NSCopying, NSMutableCopying>
 // Instance Methods
   - (void)addCharactersInRange:(NSRange)aRange;
   - (void)addCharactersInString:(NSString *)aString;
   - (void)formIntersectionWithCharacterSet:(NSCharacterSet *)otherSet;
   - (void)formUnionWithCharacterSet:(NSCharacterSet *)otherSet;
   - (void)invert;
   - (void)removeCharactersInRange:(NSRange)aRange;
   - (void)removeCharactersInString:(NSString *)aString;
 // Methods Implementing NSCopying
   - (id)copyWithZone:(NSZone *)zone;
 // Methods Implementing NSMutableCopying
   - (id)mutableCopyWithZone:(NSZone *)zone;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSMutableData* *Mac OS X 10.0*

This class adds mutable functionality to `NSData` , allowing the contents of the data object to be altered af initialization. `NSMutableData` provides two methods for adjusting the size of the underlying data buffer: `increaseLengthBy` :,and `setLength` :. The first of these increases the size of the buffer by the indicatec number of bytes, while the latter sets the size of the buffer to the specified number of bytes.

Data is added to a mutable data object using either `appendData` : or `appendBytes:length` . `appendData` joins the specified `NSData` object to the end of the receiver, while `appendBytes:length` : appends to the receiver the number of bytes specified in length from the buffer pointer to in the first parameter.

`NSMutableData` also provides `replaceBytesInRange:withBytes` : and `replaceBytesInRange:withBytes:length` : to directly alter the contents of the underlying data buffer. want to zero a portion of data, use the method `resetBytesInRange` :.

`NSMutableData` is toll-free bridged with the Core Foundation type `CFData` . As such, `NSMutableData` obje can be used interchangeably with the `CFData` pointer type, `CFDataRef` .

```
@interface NSMutableData : NSData
 // Initializers
   - (id)initWithCapacity:(unsigned)capacity;
   - (id)initWithLength:(unsigned)length;
 // Accessor Methods
   - (void)setData:(NSData *)data;
   - (void)setLength:(unsigned)length;
 // Class Methods
   + (id)dataWithCapacity:(unsigned)aNumItems;
   + (id)dataWithLength:(unsigned)length;
 // Instance Methods
   - (void)appendBytes:(const void *)bytes length:(unsigned)length;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)appendData:(NSData *)other;
- (void)increaseLengthBy:(unsigned)extraLength;
- (void *)mutableBytes;
- (void)replaceBytesInRange:(NSRange)range withBytes:(const void *)bytes;
- (void)replaceBytesInRange:(NSRange)range  withBytes:(const void *)replacementBytes
    length:(unsigned)replacementLength;
- (void)resetBytesInRange:(NSRange)range;
- (void)serializeAlignedBytesLength:(unsigned)length;
- (void)serializeDataAt:(const void *)data ofObjCType:(const char *)type
     context:(id <NSObjCTypeSerializationCallBack>)callback;
- (void)serializeInt:(int)value;
- (void)serializeInt:(int)value atIndex:(unsigned)index;
- (void)serializeInts:(int *)intBuffer count:(unsigned)numInts;
- (void)serializeInts:(int *)intBuffer count:(unsigned)numInts atIndex:(unsigned)inc
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSMutableDictionary* *Mac OS X 10.0*

`NSDictionary`, being an immutable class, does not allow clients to add, remove, or replace member objects after initialization. `NSMutableDictionary`, on the other hand, allows for the kinds of operations that alter the contents of the collection. Objects can be added to a mutable dictionary by invoking `setObject:forKey:`, and objects may be removed using `removeObjectForKey:`. When an object is added to a dictionary it is sent a `retain` message; when the object is removed, the dictionary will offset the `retain` with a `release` message.

`NSMutableDictionary` is toll-free bridged with the Core Foundation type `CFDictionary`. As such, `NSMutableDictionary` objects can be used interchangeably with the `CFDictionary` pointer type, `CFDictionaryRef`.

```
@interface NSMutableDictionary : NSDictionary
 // Initializers
   - (id)initWithCapacity:(unsigned)numItems;
 // Accessor Methods
   - (void)setObject:(id)anObject forKey:(id)aKey;
   - (void)setDictionary:(NSDictionary *)otherDictionary;
 // Class Methods
   + (id)dictionaryWithCapacity:(unsigned)numItems;
 // Instance Methods
   - (void)addEntriesFromDictionary:(NSDictionary *)otherDictionary;
   - (void)removeAllObjects;
   - (void)removeObjectForKey:(id)aKey;
   - (void)removeObjectsForKeys:(NSArray *)keyArray;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSMutableSet* *Mac OS X 10.0*

This class extends the functionality of `NSSet` by allowing objects to be added to and removed from the set; `NSSet` does not allow clients to add, remove, or replace objects in a set after initialization. This mutable subclass of `NSSet` provides an interface for those operations.

To add an object to a mutable set, use the method `addObject:`. If the object is already present in the set, this method has no effect. When an object is added to a set, it is sent a `retain` message by that set. The method `removeObject:` will remove the specified object from the set if it is a member. When an object is removed from a set, it is sent a `release` message by the set to counteract the `retain` message it was sent when added to the set.

`NSMutableSet` also implements a number of methods that are useful for combining sets in various ways. The method `unionSet:` will add each member of the parameter set into the receiver if the receiver does not already contain that object. The method `minusSet:` will remove from the receiver each object that is present in both sets, while the method `intersectSet:` will remove from the receiver each object that isn't a member of the set specified in the argument.

`NSMutableSet` is toll-free bridged with the Core Foundation type `CFSet`. As such, `NSMutableSet` objects can be used interchangeably with the `CFSet` pointer type, `CFSetRef`.

```
@interface NSMutableSet : NSSet
 // Initializers
   - (id)initWithCapacity:(unsigned)numItems;
 // Accessor Methods
   - (void)setSet:(NSSet *)otherSet;
 // Class Methods
   + (id)setWithCapacity:(unsigned)numItems;
 // Instance Methods
   - (void)addObject:(id)object;
   - (void)addObjectsFromArray:(NSArray *)array;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (void)**intersectSet**:(NSSet *)*otherSet*; |
| - (void)**minusSet**:(NSSet *)*otherSet*; |
| - (void)**removeAllObjects**; |
| - (void)**removeObject**:(id)*object*; |
| - (void)**unionSet**:(NSSet *)*otherSet*; |

## Subclasses

NSCountedSet

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSMutableString* *Mac OS X 10.0*

`NSString` creates immutable strings that cannot be changed after the object has been created. `NSMutab` adds methods that allow the contents of `NSMutableString` objects to be altered after object initializatior class provides methods for replacing portions of a string with another string, inserting strings within the string, appending strings and formats, as well as deleting portions of strings.

`NSMutableString` is toll-free bridged with the Core Foundation type `CFString` . As such, `NSMutableStri` objects can be used interchangeably with the `CFString` pointer type, `CFStringRef` .

```
@interface NSMutableString : NSString
 // Initializers
   - (id)initWithCapacity:(unsigned)capacity;
 // Accessor Methods
   - (void)setString:(NSString *)aString;
 // Class Methods
   + (id)stringWithCapacity:(unsigned)capacity;
 // Instance Methods
   - (void)appendFormat:(NSString *)format, ...;
   - (void)appendString:(NSString *)aString;
   - (void)deleteCharactersInRange:(NSRange)range;
   - (void)insertString:(NSString *)aString atIndex:(unsigned)loc;
   - (void)replaceCharactersInRange:(NSRange)range  withString:(NSString *)aString;
   - (unsigned int)replaceOccurrencesOfString:(NSString *)target
       withString:(NSString *)replacement options:(unsigned)opts range:(NSRange)searcl
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSNameSpecifier* *Mac OS X 10.2*

This class represents the scripting language reference form used to specify an object in a collection acco

```
@interface NSNameSpecifier : NSScriptObjectSpecifier
 // Initializers
   - (id)initWithContainerClassDescription:(NSScriptClassDescription *)classDesc
       containerSpecifier:(NSScriptObjectSpecifier *)container key:(NSString *)proper
 // Accessor Methods
   - (void)setName:(NSString *)name;
   - (NSString *)name;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSNetService* *Mac OS X 10.2*

`NSNetService` represents a network service that applications either publish or use as a client. Anetwork anything such as FTP, Telnet, SSH, HTTP, or any of the well-known services. A service can also be some design. `NSNetService` provides application level access to the low-level Multicast DNS responder APIs. F about Rendezvous and the Net Services APIs in Foundation, see Chapter 6.

```
@interface NSNetService : NSObject
 // Initializers
   - (id)initWithDomain:(NSString *)domain type:(NSString *)type name:(NSString *)name,
   - (id)initWithDomain:(NSString *)domain type:(NSString *)type name:(NSString *)name
 // Accessor Methods
   - (void)setDelegate:(id)delegate;
   - (id)delegate;
   - (void)setProtocolSpecificInformation:(NSString *)specificInformation;
   - (NSString *)protocolSpecificInformation;
 // Instance Methods
   - (NSString *)name;
   - (NSArray *)addresses;
   - (NSString *)domain;
   - (void)publish;
   - (void)removeFromRunLoop:(NSRunLoop *)aRunLoop forMode:(NSString *)mode;
   - (void)resolve;
   - (void)scheduleInRunLoop:(NSRunLoop *)aRunLoop forMode:(NSString *)mode;
   - (void)stop;
   - (NSString *)type;
// Methods Implemented by the Delegate
   - (void)netService:(NSNetService *)sender didNotPublish:(NSDictionary *)errorDict;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)netService:(NSNetService *)sender didNotResolve:(NSDictionary *)errorDict;
- (void)netServiceDidResolveAddress:(NSNetService *)sender;
- (void)netServiceDidStop:(NSNetService *)sender;
- (void)netServiceWillPublish:(NSNetService *)sender;
- (void)netServiceWillResolve:(NSNetService *)sender;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSNetServiceBrowser* *Mac OS X 10.2*

`NSNetServiceBrowser` is the complement to `NSNetService` and it serves two purposes: searching for ne network services advertised on a given domain. When searching for domains we can either look for all d registration authority in. These searches are performed by invoking the methods `searchForAllDomains` `searchForRegistrationDomains` , respectively. For more information about Rendezvous and the Net Se Chapter 6 .

```
@interface NSNetServiceBrowser : NSObject
 // Initializers
   - (id)init;
 // Accessor Methods
   - (void)setDelegate:(id)delegate;
   - (id)delegate;
 // Instance Methods
   - (void)removeFromRunLoop:(NSRunLoop *)aRunLoop forMode:(NSString *)mode;
   - (void)scheduleInRunLoop:(NSRunLoop *)aRunLoop forMode:(NSString *)mode;
   - (void)searchForAllDomains;
   - (void)searchForRegistrationDomains;
   - (void)searchForServicesOfType:(NSString *)type inDomain:(NSString *)domainString;
   - (void)stop;
// Methods Implemented by the Delegate
   - (void)netServiceBrowser:(NSNetServiceBrowser *)aNetServiceBrowser didFindDomain:(N
       moreComing:(BOOL)moreComing;
   - (void)netServiceBrowser:(NSNetServiceBrowser *)aNetServiceBrowser didFindService:(
       moreComing:(BOOL)moreComing;
   - (void)netServiceBrowser:(NSNetServiceBrowser *)aNetServiceBrowser didNotSearch:(NS
   - (void)netServiceBrowser:(NSNetServiceBrowser *)aNetServiceBrowser didRemoveDomain
       moreComing:(BOOL)moreComing;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)netServiceBrowser:(NSNetServiceBrowser *)aNetServiceBrowser didRemoveService
    moreComing:(BOOL)moreComing;
```

```
- (void)netServiceBrowserDidStopSearch:(NSNetServiceBrowser *)aNetServiceBrowser;
```

```
- (void)netServiceBrowserWillSearch:(NSNetServiceBrowser *)aNetServiceBrowser;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSNotification* *Mac OS X 10.0*

Notifications provide a mechanism for objects that have no other way to communicate with each other. T multicast model, in which client objects `register` themselves with a notification center to be notified in r event, which is encapsulated in an `NSNotification` object. `NSNotification` represents both notification center, and the notifications that are sent out to the observers of a particular notification.

Clients generally interact with notifications as receivers; that is, they don't create notifications, but extra information out of received notifications. To obtain information about a notification we use the three me , and `object` , which return the notification name, `userInfo` dictionary, and the notification's associated

```
@interface NSNotification : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (id)notificationWithName:(NSString *)aName object:(id)anObject;
   + (id)notificationWithName:(NSString *)aName object:(id)anObject userInfo:(NSDictio
 // Instance Methods
   - (NSString *)name;
   - (id)object;
   - (NSDictionary *)userInfo;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
 // Methods Implementing NSCopying
   - (id)copyWithZone:(NSZone *)zone;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSNotificationCenter* *Mac OS X 10.0*

This class is the core of Cocoa's notification system. Objects `register` with the default notification cente posted by other objects. The default notification center, which is also used for system notifications, is ob method `defaultCenter` .

To `register` an object as a receiver of a specified notification, we use the method `addObserver:selecto` observer is the object that wishes to be notified of the notification identified by `name` :. The `selector` : ar for the method to be invoked in `Observer` :. The `object` : parameter allows us to restrict the notificatior responds to those posted by the specified object. To remove an observer we invoke the method `removeO` removes the observer for all notifications. If we want to be selective about what notifications from whicl observing, we can use the method `removeObserver:name:object` :.

`NSNotificationCenter` provides three methods for posting notifications: `postNotification` :, `postNotificationName:object` :, and `postNotificationName:object:userInfo` :. Each of these metl levels of control over how the notification is posted.

For more information about the notifications system, see Chapter 2.

```
@interface NSNotificationCenter : NSObject
 // Class Methods
   + (id)defaultCenter;
 // Instance Methods
   - (void)addObserver:(id)observer selector:(SEL)aSelector name:(NSString *)aName obje
   - (void)postNotification:(NSNotification *)notification;
   - (void)postNotificationName:(NSString *)aName object:(id)anObject;
   - (void)postNotificationName:(NSString *)aName object:(id)anObject userInfo:(NSDicti
   - (void)removeObserver:(id)observer;
   - (void)removeObserver:(id)observer name:(NSString *)aName object:(id)anObject;
```

### Subclasses

`NSDistributedNotificationCenter`



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSNotificationQueue* *Mac OS X 10.0*

This class acts as a buffer for notification centers. Notification queues can be used to allow greater contr notifications and how they are posted to the notification center. Each thread has its own notification que the default notification center. For more information about the notification system, see Chapter 2

```
@interface NSNotificationQueue : NSObject
 // Initializers
   - (id)initWithNotificationCenter:(NSNotificationCenter *)notificationCenter;
 // Class Methods
   + (NSNotificationQueue *)defaultQueue;
 // Instance Methods
   - (void)dequeueNotificationsMatching:(NSNotification *)notification coalesceMask:(u
   - (void)enqueueNotification:(NSNotification *)notification postingStyle:(NSPostingSt
   - (void)enqueueNotification:(NSNotification *)notification postingStyle:(NSPostingSt
       coalesceMask:(unsigned)coalesceMask forModes:(NSArray *)modes;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSNull — Mac OS X 10.0

This simple class represents a `NULL` value as an object. The utility of this is that an instance of `NSNull` can be added to any of the Foundation collections, which don't provide for the inclusion of `nil`. To create an instance of `NSNull`, simply use the class method `null`.

```
@interface NSNull : NSObject
 // Convenience Constructors
   + (NSNull *)null;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSNumber

Mac OS X 10.0

NSNumber is a wrapper class for the C primitive numeric data types. Using this class, clients can store values of primitive data types, such as int and float, in Cocoa collection classes such as NSArray or NSDictionary, which only handle Objective-C objects.

```
@interface NSNumber : NSValue
 // Convenience Constructors
   + (NSNumber *)numberWithBool:(BOOL)value;
   + (NSNumber *)numberWithChar:(char)value;
   + (NSNumber *)numberWithDouble:(double)value;
   + (NSNumber *)numberWithFloat:(float)value;
   + (NSNumber *)numberWithInt:(int)value;
   + (NSNumber *)numberWithLong:(long)value;
   + (NSNumber *)numberWithLongLong:(long long)value;
   + (NSNumber *)numberWithShort:(short)value;
   + (NSNumber *)numberWithUnsignedChar:(unsigned char)value;
   + (NSNumber *)numberWithUnsignedInt:(unsigned int)value;
   + (NSNumber *)numberWithUnsignedLong:(unsigned long)value;
   + (NSNumber *)numberWithUnsignedLongLong:(unsigned long long)value;
   + (NSNumber *)numberWithUnsignedShort:(unsigned short)value;
 // Initializers
   - (id)initWithBool:(BOOL)value;
   - (id)initWithChar:(char)value;
   - (id)initWithDouble:(double)value;
   - (id)initWithFloat:(float)value;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id)initWithInt:(int)value;
- (id)initWithLong:(long)value;
- (id)initWithLongLong:(long long)value;
- (id)initWithShort:(short)value;
- (id)initWithUnsignedChar:(unsigned char)value;
- (id)initWithUnsignedInt:(unsigned int)value;
- (id)initWithUnsignedLong:(unsigned long)value;
- (id)initWithUnsignedLongLong:(unsigned long long)value;
- (id)initWithUnsignedShort:(unsigned short)value;
// Instance Methods
- (BOOL)boolValue;
- (char)charValue;
- (NSComparisonResult)compare:(NSNumber *)otherNumber;
- (NSDecimal)decimalValue;
- (NSString *)descriptionWithLocale:(NSDictionary *)locale;
- (double)doubleValue;
- (float)floatValue;
- (int)intValue;
- (BOOL)isEqualToNumber:(NSNumber *)number;
- (long long)longLongValue;
- (long)longValue;
- (short)shortValue;
- (NSString *)stringValue;
- (unsigned char)unsignedCharValue;
- (unsigned int)unsignedIntValue;
- (unsigned long long)unsignedLongLongValue;
- (unsigned long)unsignedLongValue;
- (unsigned short)unsignedShortValue;
```

## Subclasses

NSDecimalNumber

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSNumberFormatter* *Mac OS X 10.0*

This concrete subclass of `NSFormatter` converts the numeric contents of a cell into a user-specified textual representation; textual representations can also be converted to `NSDecimalNumber` objects used to store numeric cell values.

```
@interface NSNumberFormatter : NSFormatter
 // Accessor Methods
   - (void)setAttributedStringForNil:(NSAttributedString *)newAttributedString;
   - (NSAttributedString *)attributedStringForNil;
   - (void)setNegativeFormat:(NSString *)format;
   - (NSString *)negativeFormat;
   - (void)setMaximum:(NSDecimalNumber *)aMaximum;
   - (NSDecimalNumber *)maximum;
   - (void)setAllowsFloats:(BOOL)flag;
   - (BOOL)allowsFloats;
   - (void)setPositiveFormat:(NSString *)format;
   - (NSString *)positiveFormat;
   - (void)setMinimum:(NSDecimalNumber *)aMinimum;
   - (NSDecimalNumber *)minimum;
   - (void)setAttributedStringForZero:(NSAttributedString *)newAttributedString;
   - (NSAttributedString *)attributedStringForZero;
   - (void)setRoundingBehavior:(NSDecimalNumberHandler *)newRoundingBehavior;
   - (NSDecimalNumberHandler *)roundingBehavior;
   - (void)setFormat:(NSString *)format;
   - (NSString *)format;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setHasThousandSeparators:(BOOL)flag;
- (BOOL)hasThousandSeparators;
- (void)setLocalizesFormat:(BOOL)flag;
- (BOOL)localizesFormat;
- (void)setDecimalSeparator:(NSString *)newSeparator;
- (NSString *)decimalSeparator;
- (void)setAttributedStringForNotANumber:(NSAttributedString *)newAttributedString;
- (NSAttributedString *)attributedStringForNotANumber;
- (void)setTextAttributesForNegativeValues:(NSDictionary *)newAttributes;
- (NSDictionary *)textAttributesForNegativeValues;
- (void)setTextAttributesForPositiveValues:(NSDictionary *)newAttributes;
- (NSDictionary *)textAttributesForPositiveValues;
- (void)setThousandSeparator:(NSString *)newSeparator;
- (NSString *)thousandSeparator;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSObject* *Mac OS X 10.0*

`NSObject` is the root class of the Cocoa frameworks. This class defines the base functionality that enable
with the Objective-C runtime.

```
@interface NSObject <NSObject>
 // Initializers
   - (id)init;
 // Class Methods
   + (id)alloc;
   + (id)allocWithZone:(NSZone *)zone;
   + (Class)class;
   + (BOOL)conformsToProtocol:(Protocol *)protocol;
   + (id)copyWithZone:(NSZone *)zone;
   + (NSString *)description;
   + (void)initialize;
   + (IMP)instanceMethodForSelector:(SEL)aSelector;
   + (NSMethodSignature *)instanceMethodSignatureForSelector:(SEL)aSelector;
   + (BOOL)instancesRespondToSelector:(SEL)aSelector;
   + (BOOL)isSubclassOfClass:(Class)aClass;
   + (void)load;
   + (id)mutableCopyWithZone:(NSZone *)zone;
   + (id)new;
   + (void)poseAsClass:(Class)aClass;
   + (void)setVersion:(int)aVersion;
   + (Class)superclass;
   + (int)version;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Instance Methods
- (void)URL:(NSURL *)sender resourceDataDidBecomeAvailable:(NSData *)newBytes;
- (void)URL:(NSURL *)sender resourceDidFailLoadingWithReason:(NSString *)reason;
- (void)URLResourceDidCancelLoading:(NSURL *)sender;
- (void)URLResourceDidFinishLoading:(NSURL *)sender;
- (id)awakeAfterUsingCoder:(NSCoder *)aDecoder;
- (unsigned long)classCode;
- (Class)classForArchiver;
- (Class)classForCoder;
- (Class)classForKeyedArchiver;
- (Class)classForPortCoder;
- (NSString *)className;
- (id)copy;
- (void)dealloc;
- (void)doesNotRecognizeSelector:(SEL)aSelector;
- (void)forwardInvocation:(NSInvocation *)anInvocation;
- (IMP)methodForSelector:(SEL)aSelector;
- (NSMethodSignature *)methodSignatureForSelector:(SEL)aSelector;
- (id)mutableCopy;
- (void)performSelector:(SEL)aSelector withObject:(id)anArgument afterDelay:(NSTime
- (void)performSelector:(SEL)aSelector withObject:(id)anArgument afterDelay:(NSTime
    inModes:(NSArray *)modes;
- (void)performSelectorOnMainThread:(SEL)aSelector withObject:(id)arg waitUntilDone
- (void)performSelectorOnMainThread:(SEL)aSelector withObject:(id)arg waitUntilDone
    modes:(NSArray *)array;
- (id)replacementObjectForArchiver:(NSArchiver *)archiver;
- (id)replacementObjectForCoder:(NSCoder *)aCoder;
- (id)replacementObjectForKeyedArchiver:(NSKeyedArchiver *)archiver;
- (id)replacementObjectForPortCoder:(NSPortCoder *)coder;
// Methods Implementing NSObject
- (BOOL)isEqual:(id)object;
- (unsigned)hash;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (Class)**superclass**; |
| - (Class)**class**; |
| - (id)**self**; |
| - (NSZone *)**zone**; |
| - (id)**performSelector**:(SEL)*aSelector*; |
| - (id)**performSelector**:(SEL)*aSelector* **withObject**:(id)*object*; |
| - (id)**performSelector**:(SEL)*aSelector* **withObject**:(id)*object1* **withObject**:(id)*object2*; |
| - (BOOL)**isProxy**; |
| - (BOOL)**isKindOfClass**:(Class)*aClass*; |
| - (BOOL)**isMemberOfClass**:(Class)*aClass*; |
| - (BOOL)**conformsToProtocol**:(Protocol *)*aProtocol*; |
| - (BOOL)**respondsToSelector**:(SEL)*aSelector*; |
| - (id)**retain**; |
| - (oneway void)**release**; |
| - (id)**autorelease**; |
| - (unsigned)**retainCount**; |
| - (NSString *)**description**; |

## Subclasses

`NSObject` is a root class.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSPipe — Mac OS X 10.0

This class provides an interface to objects that representUnix pipes that can be used to transfer data between applications. Pipes are one-way communication channels with a read-end and a write-end. `NSFileHandle` objects representing these ends of the pipes are obtained by invoking `fileHandleForReading` and `fileHandleForWriting`.

```
@interface NSPipe : NSObject
 // Convenience Constructors
   + (id)pipe;
 // Initializers
   - (id)init;
 // Instance Methods
   - (NSFileHandle *)fileHandleForReading;
   - (NSFileHandle *)fileHandleForWriting;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSPort* *Mac OS X 10.0*

This class is an abstract class that declares the interface to objects that serve as endpoints for communi tasks. Cocoa's distributed objects system implements interprocesscommunication using subclasses of NS framework implements three concrete subclasses of `NSPort` : `NSMessagePort` , `NSMachPort` , and NSSocl `NSMachPort` are used for local communications only, while `NSSocketPort` can be used for either local or network.

```
@interface NSPort : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (NSPort *)port;
 // Accessor Methods
   - (void)setDelegate:(id)anId;
   - (id)delegate;
 // Class Methods
   + (id)allocWithZone:(NSZone *)zone;
 // Instance Methods
   - (void)addConnection:(NSConnection *)conn toRunLoop:(NSRunLoop *)runLoop forMode:(
   - (BOOL)isValid;
   - (void)invalidate;
   - (void)removeConnection:(NSConnection *)conn fromRunLoop:(NSRunLoop *)runLoop forMo
   - (void)removeFromRunLoop:(NSRunLoop *)runLoop forMode:(NSString *)mode;
   - (unsigned)reservedSpaceLength;
   - (void)scheduleInRunLoop:(NSRunLoop *)runLoop forMode:(NSString *)mode;
   - (BOOL)sendBeforeDate:(NSDate *)limitDate components:(NSMutableArray *)components f
       reserved:(unsigned)headerSpaceReserved;
   - (BOOL)sendBeforeDate:(NSDate *)limitDate msgid:(unsigned)msgID components:(NSMutab
       reserved:(unsigned)headerSpaceReserved;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implemented by the Delegate
- (void)handlePortMessage:(NSPortMessage *)message;
```

## Subclasses

NSMessagePort , NSSocketPort

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSPortCoder* *Mac OS X 10.0*

This concrete subclass of `NSCoder` is used by the distributed objects system to encode, transmit, and de
between two `NSConnection` objects residing in separate processes (objects, too, can be transmitted usir

```
@interface NSPortCoder : NSCoder
 // Initializers
   - (id)initWithReceivePort:(NSPort *)rcvPort sendPort:(NSPort *)sndPort components:(
 // Class Methods
   + (id) portCoderWithReceivePort:(NSPort *)rcvPort sendPort:(NSPort *)sndPort compone
 // Instance Methods
   - (NSConnection *)connection;
   - (NSPort *)decodePortObject;
   - (void)dispatch;
   - (void)encodePortObject:(NSPort *)aport;
   - (BOOL)isBycopy;
   - (BOOL)isByref;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSPortMessage* *Mac OS X 10.0*

Instances of this class represent low-level interapplicationcommunication meesages. Cocoa's distributed class extensively for communications between applications on the same host machine. Associated with e sending `NSPort` , a receiving `NSPort` , and an array of message components that may be instances of `NS` this class are initialized using the method `initWithSendPort:receivePort:components` :. Messages are `sendBeforeDate` :. Finally, the `components` method is used to retrieve the components of a port messag `receivePort` are used to retrieve the port message's send and receive port objects. Applications should Distributed Objects API for interapplication communication, and resort to raw messaging with port mess circumstances.

```
@interface NSPortMessage : NSObject
 // Initializers
   - (id)initWithSendPort:(NSPort *)sendPort receivePort:(NSPort *)replyPort components
 // Accessor Methods
   - (void)setMsgid:(unsigned)msgid;
   - (unsigned)msgid;
 // Instance Methods
   - (NSArray *)components;
   - (NSPort *)receivePort;
   - (BOOL)sendBeforeDate:(NSDate *)date;
   - (NSPort *)sendPort;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSPortNameServer — Mac OS X 10.0

This class is used by the distributed objects system to provideport registration services for `NSConnection` objects. Instances of `NSPortNameServer` are obtained using the class method `systemDefaultPortNameServer`. Ports are registered using the method `registerPort:name:`, and unregistered with `removePortForName:`. To locate a port, invoke `portForName:` or `portForName:host:`; the former is used to locate ports on the local host, while the latter is used to locate ports over a network.

```
@interface NSPortNameServer : NSObject
 // Class Methods
   + (NSPortNameServer *)systemDefaultPortNameServer;
 // Instance Methods
   - (NSPort *)portForName:(NSString *)name;
   - (NSPort *)portForName:(NSString *)name host:(NSString *)host;
   - (BOOL)registerPort:(NSPort *)port name:(NSString *)name;
   - (BOOL)removePortForName:(NSString *)name;
```

### Subclasses

`NSMachBootstrapServer`, `NSMessagePortNameServer`, `NSSocketPortNameServer`



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSPositionalSpecifier* *Mac OS X 10.0*

This class represents the scripting language reference form used to specify an insertion point in a collect another object in the container.

```
@interface NSPositionalSpecifier : NSObject
 // Initializers
   - (id)initWithPosition:(NSInsertionPosition)position objectSpecifier:(NSScriptObject
 // Accessor Methods
   - (void)setInsertionClassDescription:(NSScriptClassDescription *)classDescription;
 // Instance Methods
   - (id)insertionContainer;
   - (void)evaluate;
   - (int)insertionIndex;
   - (NSString *)insertionKey;
   - (BOOL)insertionReplaces;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSProcessInfo — Mac OS X 10.0

This class provides an way for applications to discover information about their current process and host. This information includes such things as the execution arguments, environment variables, process ID, and the process name. Using `NSProcessInfo`, clients may also discover information about the host, such as the host name, and the operating system name and version. `NSProcessInfo` returns the operating system version in a human-readable form that is unsuitable for parsing.

```
@interface NSProcessInfo : NSObject
 // Accessor Methods
   - (void)setProcessName:(NSString *)newName;
   - (NSString *)processName;
 // Class Methods
   + (NSProcessInfo *)processInfo;
 // Instance Methods
   - (NSDictionary *)environment;
   - (NSString *)globallyUniqueString;
   - (unsigned int)operatingSystem;
   - (NSString *)operatingSystemName;
   - (NSString *)operatingSystemVersionString;
   - (int)processIdentifier;
   - (NSArray *)arguments;
   - (NSString *)hostName;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSPropertyListSerialization* *Mac OS X 10.2*

This class provides functionality to convert organizations ofproperty list objects (`NSArray` , `NSDictionar` `NSString` , and `NSNumber` ) to and from XML or binary data formats.

```
@interface NSPropertyListSerialization : NSObject
```

```
// Class Methods
```

```
+ (NSData *)dataFromPropertyList:(id)plist format:(NSPropertyListFormat)format
    errorDescription:(NSString **)errorString;
```

```
+ (BOOL)propertyList:(id)plist isValidForFormat:(NSPropertyListFormat)format;
```

```
+ (id)propertyListFromData:(NSData *)data mutabilityOption:(NSPropertyListMutabilit
    format:(NSPropertyListFormat *)format errorDescription:(NSString **)errorStrin
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSPropertySpecifier — Mac OS X 10.0

This class represents the scripting language reference form used to specify an attribute of an object or a relationship between the target object and one or more additional objects.

```
@interface NSPropertySpecifier : NSScriptObjectSpecifier
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSProtocolChecker* *Mac OS X 10.0*

This class is used to provide a proxy for an object (the protocol checker's delegate) that filters messages sent to the object based on a formal protocol. Cocoa's distributed objects system uses this class to improve the performance of a distributed objects connection by limiting the messages sent an object to those agreed upon in a protocol. Instances of `NSProtocolChecker` are initialized with the method `initWithTarget:protocol:`. `Target` : is the object the protocol check will act as a proxy for, while `protocol` : is the protocol that defines what methods will be forwarded to the target object by the proto checker. Note that the argument type for `protocol` : is a protocol object: `Protocol *` . To obtain a pointer to a protocol, use the `@protocol(protocolName)` compiler directive.

```
@interface NSProtocolChecker : NSProxy
 // Initializers
   - (id)initWithTarget:(NSObject *)anObject protocol:(Protocol *)aProtocol;
 // Class Methods
   + (id)protocolCheckerWithTarget:(NSObject *)anObject protocol:(Protocol *)aProtocol
 // Instance Methods
   - (Protocol *)protocol;
   - (NSObject *)target;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSProxy* *Mac OS X 10.0*

This class is the only other root class in the Cocoa frameworks besides`NSObject` . `NSProxy` defines an interface to objects that stand-in for other objects. The concrete subclass,`NSDistantObject` , is an integral part of the distributed objects system where proxy objects are used to represent in a process objects that have been vended by another process.

Distributed messaging is not, however, the only use of proxy objects. They can also stand-in for objects that have not yet been created. When the proxy object receives a message for the object it is representing, then it can load the object and replace itself with the real object. This is useful for objects that may be too expensive resource-wise to create when their existence may not be needed.

```
@interface NSProxy <NSObject>
 // Class Methods
   + (id)alloc;
   + (id)allocWithZone:(NSZone *)zone;
   + (Class)class;
   + (BOOL)respondsToSelector:(SEL)aSelector;
 // Instance Methods
   - (void)dealloc;
   - (NSString *)description;
   - (void)forwardInvocation:(NSInvocation *)invocation;
   - (NSMethodSignature *)methodSignatureForSelector:(SEL)sel;
 // Methods Implementing NSObject
   - (BOOL)isEqual:(id)object;
   - (unsigned)hash;
   - (Class)superclass;
   - (Class)class;
   - (id)self;
   - (NSZone *)zone;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id)performSelector:(SEL)aSelector;
- (id)performSelector:(SEL)aSelector
  withObject:(id)object;
- (id)performSelector:(SEL)aSelector withObject:(id)object1 withObject:(id)object2;
- (BOOL)isProxy;
- (BOOL)isKindOfClass:(Class)aClass;
- (BOOL)isMemberOfClass:(Class)aClass;
- (BOOL)conformsToProtocol:(Protocol *)aProtocol;
- (BOOL)respondsToSelector:(SEL)aSelector;
- (id)retain;
- (oneway void)release;
- (id)autorelease;
- (unsigned)retainCount;
- (NSString *)description;
```

## Subclasses

`NSProxy` is a root class.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSQuitCommand — Mac OS X 10.0

Instances of this class causes its specified application to quit when executed. This class participates in Cocoa's scripting system.

```
@interface NSQuitCommand : NSScriptCommand
 // Instance Methods
   - (NSSaveOptions)saveOptions;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSRandomSpecifier

Mac OS X 10.0

This class represents the scripting language reference form used to specify an arbitrary object in a collection of objects.

```
@interface NSRandomSpecifier : NSScriptObjectSpecifier
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSRangeSpecifier* *Mac OS X 10.0*

This class represents the scripting language reference form used to specify a range of objects within aco

```
@interface NSRangeSpecifier : NSScriptObjectSpecifier
 // Initializers
   - (id)initWithContainerClassDescription:(NSScriptClassDescription *)classDesc
       containerSpecifier:(NSScriptObjectSpecifier *)container key:(NSString *)proper
       startSpecifier:(NSScriptObjectSpecifier *)startSpec endSpecifier:(NSScriptObje
 // Accessor Methods
   - (void)setStartSpecifier:(NSScriptObjectSpecifier *)startSpec;
   - (NSScriptObjectSpecifier *)startSpecifier;
   - (void)setEndSpecifier:(NSScriptObjectSpecifier *)endSpec;
   - (NSScriptObjectSpecifier *)endSpecifier;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSRecursiveLock* *Mac OS X 10.0*

This class is an implementation of the `NSLocking` protocol that provides a lock that may be acquired multiply by a single thread without creating a deadlock condition. See Chapter 2 for more information on how locking works.

```
@interface NSRecursiveLock : NSObject <NSLocking>
 // Instance Methods
   - (BOOL)lockBeforeDate:(NSDate *)limit;
   - (BOOL)tryLock;
 // Methods Implementing NSLocking
   - (void)lock;
   - (void)unlock;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSRelativeSpecifier* *Mac OS X 10.0*

This class represents the scripting language reference form used to specify the position of one object rel

```
@interface NSRelativeSpecifier : NSScriptObjectSpecifier
 // Initializers
   - (id)initWithContainerClassDescription:(NSScriptClassDescription *)classDesc
        containerSpecifier:(NSScriptObjectSpecifier *)container key:(NSString *)prope
       relativePosition:(NSRelativePosition)relPos baseSpecifier:(NSScriptObjectSpeci
 // Accessor Methods
   - (void)setRelativePosition:(NSRelativePosition)relPos;
   - (NSRelativePosition)relativePosition;
   - (void)setBaseSpecifier:(NSScriptObjectSpecifier *)baseSpecifier;
   - (NSScriptObjectSpecifier *)baseSpecifier;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSRunLoop* *Mac OS X 10.0*

This class manages input sources for a thread. In Cocoa, input sources may include mouse and keyboard as `NSPorts` , `NSTimers` , and `NSConnections` . `NSRunLoop` serves as an interface between an application the operating system. When events from the mouse, keyboard, or other peripherals are received in the system, they are forwarded to the active application through that application's run-loop. Therun-loop mo input sources continuously for events, and dispatches them to the appropriate object in an application. F information on `NSRunLoop` and event handling in Cocoa, see Chapter 3.

Every instance of `NSApplication` creates and manages its own run-loop. This is the main run-loop of th Because this run-loop is created for us, we don't need to use any of the`NSRunLoop` APIs. However, new t have a run-loop object associated with them. For a thread to participate in event handling and notificati run-loop sources, create a run-loop for any the thread. If you need to have access to a run-loop object, obtain a pointer to the run-loop of the current thread by invoking the class method`currentRunLoop` . If start your own run-loop in a thread, you must first create the run-loop using`alloc` and `init` , and send to the run-loop object.

`NSRunLoop` objects are based on Core Foundation `CFRunLoop` objects. The method `getCFRunLoop` returns 's underlying Core Foundation run-loop.

```
@interface NSRunLoop : NSObject
 // Class Methods
   + (NSRunLoop *)currentRunLoop;
 // Instance Methods
   - (void)acceptInputForMode:(NSString *)mode beforeDate:(NSDate *)limitDate;
   - (void)addPort:(NSPort *)aPort forMode:(NSString *)mode;
   - (void)addTimer:(NSTimer *)timer forMode:(NSString *)mode;
   - (void)cancelPerformSelector:(SEL)aSelector target:(id)target argument:(id)arg;
   - (void)cancelPerformSelectorsWithTarget:(id)target;
   - (void)configureAsServer;
   - (NSString *)currentMode;
   - (CFRunLoopRef)getCFRunLoop;
   - (NSDate *)limitDateForMode:(NSString *)mode;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)performSelector:(SEL)aSelector target:(id)target argument:(id)arg order:(un
    modes:(NSArray *)modes;
```

```
- (void)removePort:(NSPort *)aPort forMode:(NSString *)mode;
```

```
- (void)run;
```

```
- (BOOL)runMode:(NSString *)mode  beforeDate:(NSDate *)limitDate;
```

```
- (void)runUntilDate:(NSDate *)limitDate;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSScanner* *Mac OS X 10.0*

This class declares an API for objects that can interpret and convert a string into individual number and string values. When you create a scanner object, you assign it the string to scan. Scanner objects are created with the method `scannerWithString:`, or initialized with `initWithString:`. A scanner works by interpreting and converting string and number values based on the scan message sent to the scanner ol For example, if the method `scanInt:` is invoked, the scanner will scan through the string searching fron next available integer. Scanning usually happens within a loop, until the entire string has been scanned. Clients can test whether or not the scanner is at the end of the string using the method `isAtEnd`.

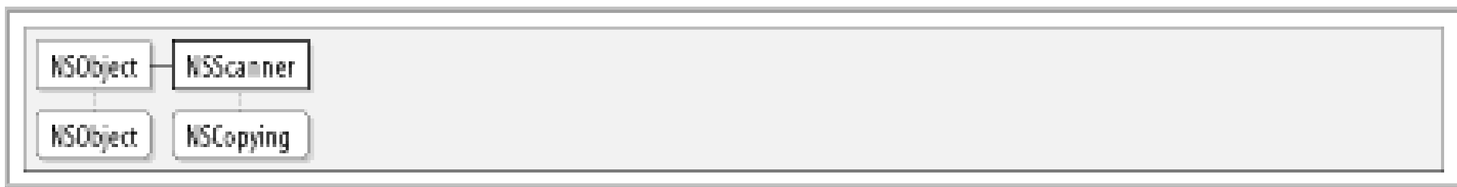


```
@interface NSScanner : NSObject <NSCopying>
 // Convenience Constructors
   + (id)scannerWithString:(NSString *)string;
 // Initializers
   - (id)initWithString:(NSString *)string;
 // Accessor Methods
   - (void)setCaseSensitive:(BOOL)flag;
   - (BOOL)caseSensitive;
   - (void)setScanLocation:(unsigned)pos;
   - (unsigned)scanLocation;
   - (void)setCharactersToBeSkipped:(NSCharacterSet *)set;
   - (NSCharacterSet *)charactersToBeSkipped;
   - (void)setLocale:(NSDictionary *)dict;
   - (NSDictionary *)locale;
 // Class Methods
   + (id)localizedScannerWithString:(NSString *)string;
 // Instance Methods
   - (BOOL)scanCharactersFromSet:(NSCharacterSet *)set intoString:(NSString **)value;
   - (BOOL)scanDecimal:(NSDecimal *)dcm;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isAtEnd;
- (BOOL)scanDouble:(double *)value;
- (BOOL)scanFloat:(float *)value;
- (BOOL)scanHexInt:(unsigned *)value;
- (BOOL)scanInt:(int *)value;
- (BOOL)scanLongLong:(long long *)value;
- (BOOL)scanString:(NSString *)string  intoString:(NSString **)value;
- (BOOL)scanUpToCharactersFromSet:(NSCharacterSet *)set intoString:(NSString **)valu
- (BOOL)scanUpToString:(NSString *)string intoString:(NSString **)value;
- (NSString *)string;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSScriptClassDescription* *Mac OS X 10.0*

This class is used by Cocoa's scripting information to encapsulate information aboutscriptable classes, ar determine characteristics and properties of scriptable objects.

```
@interface NSScriptClassDescription : NSClassDescription
// Initializers
  - (id)initWithSuiteName:(NSString *)suiteName className:(NSString *)className dicti
// Instance Methods
  - (unsigned long)appleEventCode;
  - (unsigned long)appleEventCodeForKey:(NSString *)key;
  - (NSScriptClassDescription *)classDescriptionForKey:(NSString *)key;
  - (NSString *)className;
  - (NSString *)defaultSubcontainerAttributeKey;
  - (BOOL)isLocationRequiredToCreateForKey:(NSString *)toManyRelationshipKey;
  - (BOOL)isReadOnlyKey:(NSString *)key;
  - (NSString *)keyWithAppleEventCode:(unsigned long)code;
  - (BOOL)matchesAppleEventCode:(unsigned long)code;
  - (SEL)selectorForCommand:(NSScriptCommandDescription *)commandDef;
  - (NSString *)suiteName;
  - (NSScriptClassDescription *)superclassDescription;
  - (BOOL)supportsCommand:(NSScriptCommandDescription *)commandDef;
  - (NSString *)typeForKey:(NSString *)key;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSScriptCoercionHandler* *Mac OS X 10.0*

This class is used by Cocoa's scripting system to translate onescripting data type into another data type coding operations.

```
@interface NSScriptCoercionHandler : NSObject
 // Class Methods
   + (NSScriptCoercionHandler *)sharedCoercionHandler;
 // Instance Methods
   - (id)coerceValue:(id)value toClass:(Class)toClass;
   - (void)registerCoercer:(id)coercer selector:(SEL)selector toConvertFromClass:(Clas
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSScriptCommand — Mac OS X 10.0

This class represents a scripting statement in Cocoa's scripting system. A scripting statement is something like "set bounds of front window to 1104, 360, 1280, 561}". When an application receives the Apple Event corresponding to this script statement, it is translated into an instance `NSScriptCommand`.

```
@interface NSScriptCommand : NSObject <NSCoding>
 // Initializers
   - (id)initWithCommandDescription:(NSScriptCommandDescription *)commandDef;
 // Accessor Methods
   - (void)setReceiversSpecifier:(NSScriptObjectSpecifier *)receiversRef;
   - (NSScriptObjectSpecifier *)receiversSpecifier;
   - (void)setDirectParameter:(id)directParameter;
   - (id)directParameter;
   - (void)setScriptErrorNumber:(int)num;
   - (int)scriptErrorNumber;
   - (void)setScriptErrorString:(NSString *)str;
   - (NSString *)scriptErrorString;
   - (void)setArguments:(NSDictionary *)args;
   - (NSDictionary *)arguments;
 // Instance Methods
   - (NSScriptCommandDescription *)commandDescription;
   - (NSDictionary *)evaluatedArguments;
   - (id)evaluatedReceivers;
   - (id)executeCommand;
   - (BOOL)isWellFormed;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id)performDefaultImplementation;
```

```
// Methods Implementing NSCoding
```

```
- (void)encodeWithCoder:(NSCoder *)aCoder;
```

```
- (id)initWithCoder:(NSCoder *)aDecoder;
```

## Subclasses

NSCloneCommand, NSCloseCommand, NSCountCommand, NSCreateCommand, NSDeleteCommand, NSExistsCommand, NSGetCommand, NSMoveCommand, NSQuitCommand, NSSetCommand

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSScriptCommandDescription — Mac OS X 10.0

This class represents a scripting command within a Cocoa application, framework, or bundle. The job o this class is to provide information about a class and method, including all argument and return types, that is used to represent a scripting command.

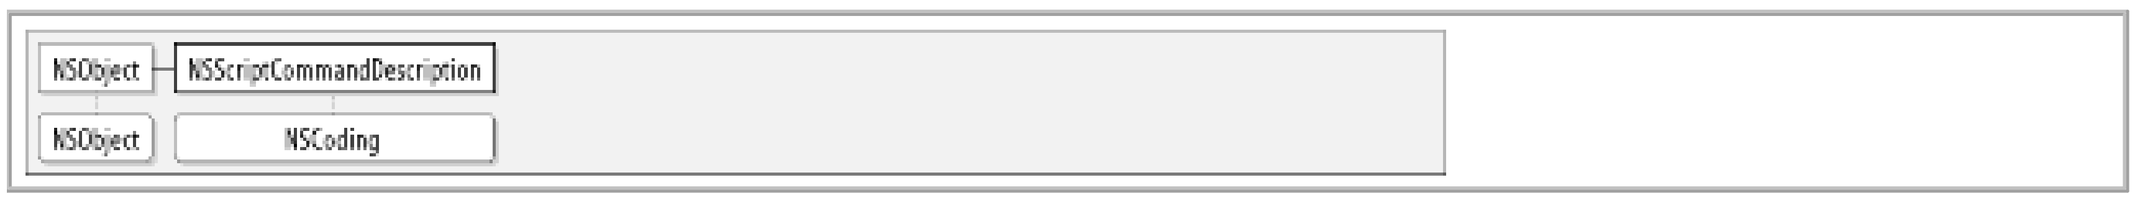


```
@interface NSScriptCommandDescription : NSObject <NSCoding>
 // Initializers
   - (id)initWithSuiteName:(NSString *)suiteName commandName:(NSString *)commandName
       dictionary:(NSDictionary *)commandDefDict;
 // Instance Methods
   - (unsigned long)appleEventClassCode;
   - (unsigned long)appleEventCode;
   - (unsigned long)appleEventCodeForArgumentWithName:(NSString *)argName;
   - (unsigned long)appleEventCodeForReturnType;
   - (NSArray *)argumentNames;
   - (NSString *)commandClassName;
   - (NSString *)commandName;
   - (NSScriptCommand *)createCommandInstance;
   - (NSScriptCommand *)createCommandInstanceWithZone:(NSZone *)zone;
   - (BOOL)isOptionalArgumentWithName:(NSString *)argName;
   - (NSString *)returnType;
   - (NSString *)suiteName;
   - (NSString *)typeForArgumentWithName:(NSString *)argName;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSScriptExecutionContext* *Mac OS X 10.0*

Every scripting command is executed within some context that determines which objects are involved in the command. This class declares the interface to the shared application object that represents the execution context of scripting commands.

```
@interface NSScriptExecutionContext : NSObject
 // Accessor Methods
   - (void)setTopLevelObject:(id)obj;
   - (id)topLevelObject;
   - (void)setObjectBeingTested:(id)obj;
   - (id)objectBeingTested;
   - (void)setRangeContainerObject:(id)obj;
   - (id)rangeContainerObject;
 // Class Methods
   + (NSScriptExecutionContext *)sharedScriptExecutionContext;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSScriptObjectSpecifier* *Mac OS X 10.0*

This is an abstract class for classes of objects known as*object specifiers* . An object specifier is a represe scripting language reference form that is used to identify objects in relation to container objects. Object used to represent the portions of an AppleScript used to identify the object that is the target of a script example, in the AppleScript`get word 3 of paragraph 15 of the front document` there are three o `word 3` , `paragraph 15` , and `front document` .

Object specifiers are nested, where more general specifiers are evaluated to provide an evaluation conte nested child specifier. In the example, the specifier`front paragraph` is evaluated first to provide a cont the specifier `paragraph 15` can be evaluated. The scripting system evaluates object specifiers in this wa what object in the application should be the recipient of the command being executed.

The Foundation framework implements several subclasses of`NSScriptObjectSpecifier` . These subclas object specifiers that represent the various AppleScript language constructs (reference forms) used to ic targets of script commands.

```
@interface NSScriptObjectSpecifier : NSObject <NSCoding>
 // Initializers
   - (id)initWithContainerClassDescription:(NSScriptClassDescription *)classDesc
         containerSpecifier:(NSScriptObjectSpecifier *)container key:(NSString *)prope
   - (id)initWithContainerSpecifier:(NSScriptObjectSpecifier *)container key:(NSString
 // Accessor Methods
   - (void)setEvaluationErrorNumber:(int)error;
   - (int)evaluationErrorNumber;
   - (void)setContainerIsObjectBeingTested:(BOOL)flag;
   - (BOOL)containerIsObjectBeingTested;
   - (void)setChildSpecifier:(NSScriptObjectSpecifier *)child;
   - (NSScriptObjectSpecifier *)childSpecifier;
   - (void)setKey:(NSString *)key;
   - (NSString *)key;
   - (void)setContainerIsRangeContainerObject:(BOOL)flag;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)containerIsRangeContainerObject;
- (void)setContainerClassDescription:(NSScriptClassDescription *)classDesc;
- (NSScriptClassDescription *)containerClassDescription;
- (void)setContainerSpecifier:(NSScriptObjectSpecifier *)subRef;
- (NSScriptObjectSpecifier *)containerSpecifier;
// Instance Methods
- (NSScriptObjectSpecifier *)evaluationErrorSpecifier;
- (int *)indicesOfObjectsByEvaluatingWithContainer:(id)container count:(int *)count
- (NSScriptClassDescription *)keyClassDescription;
- (id)objectsByEvaluatingSpecifier;
- (id)objectsByEvaluatingWithContainers:(id)containers;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
```

## Subclasses

NSIndexSpecifier , NSMiddleSpecifier , NSNameSpecifier , NSPropertySpecifier , NSRandomSpeci
NSRangeSpecifier , NSRelativeSpecifier , NSUniqueIDSpecifier , NSWhoseSpecifier

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSScriptSuiteRegistry* *Mac OS X 10.0*

Instances of this class are used to manage an application's scripting information, and as such it is an int component in Cocoa's built-in support for scripting. Application scripting information is supplied by *script* script suite is made up of a suite definition and script terminologies. Cocoa supports the two standard sc of the box: (Core and Text). Script suites define how an application may be controlled by scripting, and the information provided by script suite tells the application how to translate Apple Events it receives int commands and object specifiers. This class is used primarily internally by Cocoa's scripting system, and should never have to interact with it directly.

```
@interface NSScriptSuiteRegistry : NSObject
 // Class Methods
   + (void)setSharedScriptSuiteRegistry:(NSScriptSuiteRegistry *)registry;
   + (NSScriptSuiteRegistry *)sharedScriptSuiteRegistry;
 // Instance Methods
   - (NSData *)aeteResource:(NSString *)languageName;
   - (unsigned long)appleEventCodeForSuite:(NSString *)suiteName;
   - (NSBundle *)bundleForSuite:(NSString *)suiteName;
   - (NSScriptClassDescription *)classDescriptionWithAppleEventCode:(unsigned long)cla
   - (NSDictionary *)classDescriptionsInSuite:(NSString *)suiteName;
   - (NSScriptCommandDescription *)commandDescriptionWithAppleEventClass:(unsigned long
       andAppleEventCode:(unsigned long)commandCode;
   - (NSDictionary *)commandDescriptionsInSuite:(NSString *)suiteName;
   - (void)loadSuiteWithDictionary:(NSDictionary *)dict fromBundle:(NSBundle *)bundle;
   - (void)loadSuitesFromBundle:(NSBundle *)bundle;
   - (void)registerClassDescription:(NSScriptClassDescription *)classDesc;
   - (void)registerCommandDescription:(NSScriptCommandDescription *)commandDef;
   - (NSString *)suiteForAppleEventCode:(unsigned long)code;
   - (NSArray *)suiteNames;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSScriptWhoseTest

Mac OS X 10.0

This class is used in Cocoa's scripting system to represent the Boolean expression of an NSScriptWhoseSpecifier. NSScriptWhoseTest is an abstract class that defines only the single method isTrue. This method is invoked to evaluate the expression represented by the NSScriptWhoseTest object, and returns a BOOL. Foundation implements two concrete subclasses of this class: NSLogicalTest and NSSpecifierTest.

```
@interface NSScriptWhoseTest : NSObject <NSCoding>
 // Instance Methods
   - (BOOL)isTrue;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
```

## Subclasses

NSLogicalTest, NSSpecifierTest



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSSerializer* *Mac OS X 10.0*

This class converts a collection of property-list objects (`NSDictionary` , `NSArray` , `NSString` , and `NSData` ) in memory into a form that can be saved to a file, for example. This class has been deprecated, and clients should instead use the class `NSPropertyListSerialization` .

```
@interface NSSerializer : NSObject
 // Class Methods
   + (NSData *)serializePropertyList:(id)aPropertyList;
   + (void)serializePropertyList:(id)aPropertyList intoData:(NSMutableData *)mdata;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSSet* *Mac OS X 10.0*

This class implements a unordered collection of unique objects. `NSSet` is based on the mathematical idea of a *set*, where each member is unique, and the order of elements is unimportant. What is important in a set is object membership. `NSSet` objects are often used in situations where an application needs to quickly determine whether or not an object is a member of a collection. As such, `NSSet` is able to more efficiently make this determination than `NSArray`.

To test whether or not an object is a member of set, use the method `containsObject:`, which returns a `BOOL`. Alternatively, the method `member` can be used, which returns the specified object if it exists in the set, and `nil` otherwise.

To enumerate the contents of a set, we create an instance of `NSEnumerator` by sending an `objectEnumerator` message to the set. Note that the order that objects are accessed by the enumerator is not guaranteed, and an order should not be assumed.

Often we want to invoke some method in each member of a collection. `NSSet` provides a method that saves us from the burden of having to enumerate the contents of the set and send the message to each object manually. This method is `makeObjectsPerformSelector:`, which will cause the method matching the selector to be invoked in each member of the collection. If you need to invoke a metho that takes an argument, then use the method `makeObjectsPerformSelector:withObject:`.

`NSSet` provides several methods that are useful for comparing two sets. The method `isSubsetOfSet:` will return `YES` if the specified set contains every member of the receiver. The method `intersectsSet:` returns `YES` if at least one member of the receiver is present in the specified set. Finally, `isEqualToSet:` will return `YES` if the contents of the receiver are equal to the contents of the specified set.

`NSSet` is toll-free bridged with the Core Foundation type `CFSet`. As such, `NSSet` objects can be used interchangeably with the `CFSet` pointer type, `CFSetRef`.

```
@interface NSSet : NSObject <NSCoding, NSCopying, NSMutableCopying>
 // Convenience Constructors
   + (id)set;
   + (id)setWithArray:(NSArray *)array;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (id)setWithObject:(id)object;
+ (id)setWithObjects:(id *)objs count:(unsigned)cnt;
+ (id)setWithObjects:(id)firstObj, ...;
+ (id)setWithSet:(NSSet *)set;
// Initializers
- (id)initWithArray:(NSArray *)array;
- (id)initWithObjects:(id *)objects count:(unsigned)count;
- (id)initWithObjects:(id)firstObj, ...;
- (id)initWithSet:(NSSet *)set;
- (id)initWithSet:(NSSet *)set copyItems:(BOOL)flag;
// Instance Methods
- (NSArray *)allObjects;
- (id)anyObject;
- (BOOL)containsObject:(id)anObject;
- (unsigned)count;
- (NSString *)description;
- (NSString *)descriptionWithLocale:(NSDictionary *)locale;
- (BOOL)intersectsSet:(NSSet *)otherSet;
- (BOOL)isEqualToSet:(NSSet *)otherSet;
- (BOOL)isSubsetOfSet:(NSSet *)otherSet;
- (void)makeObjectsPerformSelector:(SEL)aSelector;
- (void)makeObjectsPerformSelector:(SEL)aSelector withObject:(id)argument;
- (id)member:(id)object;
- (NSEnumerator *)objectEnumerator;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implementing NSMutableCopying
- (id)mutableCopyWithZone:(NSZone *)zone;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

## Subclasses

NSMutableSet

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSSetCommand — Mac OS X 10.0

Instances of this class are used in Cocoa's scripting system to set the specified properties of the specified object to the specified value.

```
@interface NSSetCommand : NSScriptCommand
 // Accessor Methods
   - (void)setReceiversSpecifier:(NSScriptObjectSpecifier *)receiversRef;
 // Instance Methods
   - (NSScriptObjectSpecifier *)keySpecifier;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSSocketPort* *Mac OS X 10.0*

This subclass of `NSPort` provides an interface to objects that can serve as endpoints for distributed objec
`NSSocketPort` is implemented using the BSD Sockets API, which makes it useful for raw network comm
component of the distributed objects system. Asocket file descriptor that is suitable for use with the BSI
a socket message to an instance of this class.

While local communication is supported in socket ports, it is generally more efficient in terms of resourc
`NSMessagePort` for local distributed objects connections.

```
@interface NSSocketPort : NSPort
 // Initializers
   - (id)init;
   - (id)initRemoteWithProtocolFamily:(int)family socketType:(int)type protocol:(int)p
   - (id)initRemoteWithTCPPort:(unsigned short)port host:(NSString *)hostName;
   - (id)initWithProtocolFamily:(int)family  socketType:(int)type protoco
   - (id)initWithProtocolFamily:(int)family  socketType:(int)type protoco
       socket:(NSSocketNativeHandle)sock;
   - (id)initWithTCPPort:(unsigned short)port;
 // Instance Methods
   - (NSData *)address;
   - (int)protocol;
   - (int)protocolFamily;
   - (NSSocketNativeHandle)socket;
   - (int)socketType;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSSocketPortNameServer — Mac OS X 10.0

This subclass of `NSPortNameServer` accepts and returns instances of `NSSocketPort`. `NSConnection` objects use port name servers to `register` and discover communication ports that can be used for distributed objects connections. Additional subclasses of `NSPortNameServer` that handle other types of ports are `NSMachBootstrapServer` and `NSMessagePortNameServer`.

Unlike the other port name server classes, `NSSocketPortNameServer` can operate over a network. `NSSocketPortNameServer` is implemented using the Foundation framework's implementation of Rendezvous found in `NSNetService`. Clients are able to discover socket ports by name only.

Note: this class did not function in versions of Mac OS X prior to 10.2.

```
@interface NSSocketPortNameServer : NSPortNameServer
 // Accessor Methods
   - (void)setDefaultNameServerPortNumber:(unsigned short)portNumber;
   - (unsigned short)defaultNameServerPortNumber;
 // Class Methods
   + (id)sharedInstance;
 // Instance Methods
   - (NSPort *)portForName:(NSString *)name;
   - (NSPort *)portForName:(NSString *)name host:(NSString *)host;
   - (NSPort *)portForName:(NSString *)name host:(NSString *)host
       nameServerPortNumber:(unsigned short)portNumber;
   - (BOOL)registerPort:(NSPort *)port name:(NSString *)name;
   - (BOOL)registerPort:(NSPort *)port name:(NSString *)name
      nameServerPortNumber:(unsigned short)portNumber;
   - (BOOL)removePortForName:(NSString *)name;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSSpecifierTest* *Mac OS X 10.0*

This class represents a single Boolean expression. `NSSpecifierTest` is initialized with the method `initWithObjectSpecifier:comparisonOperator:testObject:`. This method will initialize the specifier test to compare `testObject:` with the object specifier by the `...ObjectSpecifier:` parameter; the comparison is made using the indicated `comparisonOperator:`, which is a constant of type `NSTestComparisonOperation`.

```
@interface NSSpecifierTest : NSScriptWhoseTest
```

```
// Initializers
```

```
- (id)initWithObjectSpecifier:(NSScriptObjectSpecifier *)obj1
    comparisonOperator:(NSTestComparisonOperation)compOp testObject:(id)obj2;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSSpellServer* *Mac OS X 10.0*

This class is used by applications to `register` a custom spellchecker with the operating system. Develop
create spellchecking services for all applications that use Cocoa's spellchecking services (through the cla

```
@interface NSSpellServer : NSObject
 // Accessor Methods
   - (void)setDelegate:(id)anObject;
   - (id)delegate;
 // Instance Methods
   - (BOOL)isWordInUserDictionaries:(NSString *)word caseSensitive:(BOOL)flag;
   - (BOOL)registerLanguage:(NSString *)language byVendor:(NSString *)vendor;
   - (void)run;
// Methods Implemented by the Delegate
   - (void)spellServer:(NSSpellServer *)sender didForgetWord:(NSString *)word inLanguag
   - (void)spellServer:(NSSpellServer *)sender didLearnWord:(NSString *)word inLanguage
   - (NSRange)spellServer:(NSSpellServer *)sender findMisspelledWordInString:(NSString
       language:(NSString *)language wordCount:(int *)wordCount countOnly:(BOOL)count
   - (NSArray *)spellServer:(NSSpellServer *)sender suggestGuessesForWord:(NSString *)w
       inLanguage:(NSString *)language;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSString* *Mac OS X 10.0*

This is Foundation's primary class for representing and manipulatingstrings. At their core, instances of NS array of Unicode characters. With built-in, low-level support of Unicode, Cocoa applications can represer language in existence, past and present. `NSString` is toll-free bridged with the Core Foundation type CFS objects can be used interchangeably with the `CFString` pointer type, `CFStringRef` .

```
@interface NSString : NSObject <NSCoding, NSCopying, NSMutableCopying>
 // Convenience Constructors
   + (id)string;
   + (id)stringWithCString:(const char *)bytes;
   + (id)stringWithCString:(const char *)bytes length:(unsigned)length;
   + (id)stringWithCharacters:(const unichar *)characters  length:(unsigned)length;
   + (id)stringWithContentsOfFile:(NSString *)path;
   + (id)stringWithContentsOfURL:(NSURL *)url;
   + (id)stringWithFormat:(NSString *)format, ...;
   + (id)stringWithString:(NSString *)string;
   + (id)stringWithUTF8String :(const char *)bytes;
 // Initializers
   - (id)init;
   - (id)initWithCString:(const char *)bytes;
   - (id)initWithCString:(const char *)bytes length:(unsigned)length;
   - (id)initWithCStringNoCopy:(char *)bytes  length:(unsigned)length freeWhenDone:(BO
   - (id)initWithCharacters:(const unichar *)characters length:(unsigned)length;
   - (id)initWithCharactersNoCopy:(unichar *)characters length:(unsigned)length freeWhe
   - (id)initWithContentsOfFile:(NSString *)path;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id)initWithContentsOfURL:(NSURL *)url;
- (id)initWithData:(NSData *)data encoding:(NSStringEncoding)encoding;
- (id)initWithFormat:(NSString *)format arguments:(va_list)argList;
- (id)initWithFormat:(NSString *)format locale:(NSDictionary *)dict arguments:(va_l
- (id)initWithFormat:(NSString *)format locale:(NSDictionary *)dict, ...;
- (id)initWithFormat:(NSString *)format, ...;
- (id)initWithString:(NSString *)aString;
- (id)initWithUTF8String :(const char *)bytes;
// Class Methods
+ (const NSStringEncoding *)availableStringEncodings;
+ (NSStringEncoding)defaultCStringEncoding;
+ (NSString *)localizedNameOfStringEncoding:(NSStringEncoding)encoding;
+ (id)localizedStringWithFormat:(NSString *)format, ...;
+ (NSString *)pathWithComponents:(NSArray *)components;
// Instance Methods
- (const char *)UTF8String;
- (const char *)cString;
- (unsigned)cStringLength;
- (BOOL)canBeConvertedToEncoding:(NSStringEncoding)encoding;
- (NSString *)capitalizedString;
- (NSComparisonResult)caseInsensitiveCompare:(NSString *)string;
- (unichar)characterAtIndex:(unsigned)index;
- (NSString *)commonPrefixWithString:(NSString *)aString options:(unsigned)mask;
- (NSComparisonResult)compare:(NSString *)string;
- (NSComparisonResult)compare:(NSString *)string options:(unsigned)mask;
- (NSComparisonResult)compare:(NSString *)string options:(unsigned)mask range:(NSRa
- (NSComparisonResult)compare:(NSString *)string options:(unsigned)mask range:(NSRa
    locale:(NSDictionary *)dict;
- (unsigned)completePathIntoString:(NSString **)outputName caseSensitive:(BOOL)flag
    matchesIntoArray:(NSArray **)outputArray filterTypes:(NSArray *)filterTypes;
- (NSArray *)componentsSeparatedByString:(NSString *)separator;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSData *)dataUsingEncoding:(NSStringEncoding)encoding;
- (NSData *)dataUsingEncoding:(NSStringEncoding)encoding allowLossyConversion:(BOOL
- (NSString *)decomposedStringWithCanonicalMapping;
- (NSString *)decomposedStringWithCompatibilityMapping;
- (NSString *)description;
- (double)doubleValue;
- (NSStringEncoding)fastestEncoding;
- (const char *)fileSystemRepresentation;
- (float)floatValue;
- (void)getCString:(char *)bytes;
- (void)getCString:(char *)bytes maxLength:(unsigned)maxLength;
- (void)getCString:(char *)bytes maxLength:(unsigned)maxLength range:(NSRange)aRange
    remainingRange:(NSRangePointer)leftoverRange;
- (void)getCharacters:(unichar *)buffer;
- (void)getCharacters:(unichar *)buffer  range:(NSRange)aRange;
- (BOOL)getFileSystemRepresentation:(char *)cname maxLength:(unsigned)max;
- (void)getLineStart:(unsigned *)startPtr end:(unsigned *)lineEndPtr contentsEnd:(u
    forRange:(NSRange)range;
- (BOOL)hasPrefix:(NSString *)aString;
- (BOOL)hasSuffix:(NSString *)aString;
- (unsigned)hash;
- (int)intValue;
- (BOOL)isAbsolutePath;
- (BOOL)isEqualToString:(NSString *)aString;
- (NSString *)lastPathComponent;
- (unsigned int)length;
- (NSRange)lineRangeForRange:(NSRange)range;
- (NSComparisonResult)localizedCaseInsensitiveCompare:(NSString *)string;
- (NSComparisonResult)localizedCompare:(NSString *)string;
- (const char *)lossyCString;
- (NSString *)lowercaseString;
- (NSArray *)pathComponents;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSString *)pathExtension;
- (NSString *)precomposedStringWithCanonicalMapping;
- (NSString *)precomposedStringWithCompatibilityMapping;
- (id)propertyList;
- (NSDictionary *)propertyListFromStringsFileFormat;
- (NSRange)rangeOfCharacterFromSet:(NSCharacterSet *)aSet;
- (NSRange)rangeOfCharacterFromSet:(NSCharacterSet *)aSet options:(unsigned int)mas
- (NSRange)rangeOfCharacterFromSet:(NSCharacterSet *)aSet
    options:(unsigned int)mask range:(NSRange)searchRange;
- (NSRange)rangeOfComposedCharacterSequenceAtIndex:(unsigned)index;
- (NSRange)rangeOfString:(NSString *)aString;
- (NSRange)rangeOfString:(NSString *)aString options:(unsigned)mask;
- (NSRange)rangeOfString:(NSString *)aString options:(unsigned)mask range:(NSRange)s
- (NSStringEncoding)smallestEncoding;
- (NSString *)stringByAbbreviatingWithTildeInPath;
- (NSString *)stringByAppendingFormat:(NSString *)format, ...;
- (NSString *)stringByAppendingPathComponent:(NSString *)str;
- (NSString *)stringByAppendingPathExtension:(NSString *)str;
- (NSString *)stringByAppendingString:(NSString *)aString;
- (NSString *)stringByDeletingLastPathComponent;
- (NSString *)stringByDeletingPathExtension;
- (NSString *)stringByExpandingTildeInPath;
- (NSString *)stringByPaddingToLength:(unsigned)newLength withString:(NSString *)pa
    startingAtIndex:(unsigned)padIndex;
- (NSString *)stringByResolvingSymlinksInPath;
- (NSString *)stringByStandardizingPath;
- (NSString *)stringByTrimmingCharactersInSet:(NSCharacterSet *)set;
- (NSArray *)stringsByAppendingPaths:(NSArray *)paths;
- (NSString *)substringFromIndex:(unsigned)from;
- (NSString *)substringToIndex:(unsigned)to;
- (NSString *)substringWithRange:(NSRange)range;
- (NSString *)uppercaseString;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)writeToFile:(NSString *)path atomically:(BOOL)useAuxiliaryFile;
- (BOOL)writeToURL:(NSURL *)url atomically:(BOOL)atomically;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implementing NSMutableCopying
- (id)mutableCopyWithZone:(NSZone *)zone;
```

## Subclasses

NSMutableString , NSSimpleCString

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSTask* *Mac OS X 10.0*

This class provides an interface for an application to execute other programs as subprocesses. To create NSTask , use alloc and init . Before a task can be executed, it must be prepared. By default a task inh the environment of its parent process, which includes attributes such as the current working directory. T specify what program the task should execute, set the launch path of the program in the task using the method setLaunchPath :. Arguments for the executable are provided in an NSArray through the methoc setArguments :. If you need to pass data to a task and receive data in return, connect an NSPipe or NSFileHandle object to the executable's standard input, output, or error using setStandardInput :, setStandardOutput :, and setStandardError :, respectively.

To execute a task, invoke the method launch . NSTask also provides methods for controlling the executi a task through the methods interrupt , suspend , terminate , and resume .

```
@interface NSTask : NSObject
 // Initializers
   - (id)init;
 // Accessor Methods
   - (void)setStandardInput:(id)input;
   - (id)standardInput;
   - (void)setLaunchPath:(NSString *)path;
   - (NSString *)launchPath;
   - (void)setEnvironment:(NSDictionary *)dict;
   - (NSDictionary *)environment;
   - (void)setCurrentDirectoryPath:(NSString *)path;
   - (NSString *)currentDirectoryPath;
   - (void)setStandardOutput:(id)output;
   - (id)standardOutput;
   - (void)setStandardError:(id)error;
   - (id)standardError;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setArguments:(NSArray *)arguments;
- (NSArray *)arguments;
// Class Methods
+ (NSTask *)launchedTaskWithLaunchPath:(NSString *)path arguments:(NSArray *)argume
// Instance Methods
- (void)interrupt;
- (void)launch;
- (BOOL)isRunning;
- (int)processIdentifier;
- (BOOL)resume;
- (BOOL)suspend;
- (void)terminate;
- (int)terminationStatus;
- (void)waitUntilExit;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSThread* *Mac OS X 10.0*

`NSThread` provides functionality to run processes as separate threads of execution. `NSThread` takes a me selector that will be run in its own thread. Threads share the memory space of their parent processes, u processes executed by `NSTask` instances.

```
@interface NSThread : NSObject
 // Convenience Constructors
   + (double)threadPriority;
 // Class Methods
   + (NSThread *)currentThread;
   + (void)detachNewThreadSelector:(SEL)selector toTarget:(id)target withObject:(id)arg
   + (void)exit;
   + (BOOL)isMultiThreaded;
   + (BOOL)setThreadPriority:(double)priority;
   + (void)sleepUntilDate:(NSDate *)date;
 // Instance Methods
   - (NSMutableDictionary *)threadDictionary;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# *NSTimer* *Mac OS X 10.0*

This class represents a timer in the run-loop that can be used to invoke a method in a target after some spaced intervals. The most straightforward way of creating a time is to use the method `scheduledTimerI` `Interval:target:selector:userInfo:repeats` :, which creates the timer and add it to the current rur remove a timer from its run-loop and stopping it from firing again, send an `invalidate` message to the t

`NSTimer` is toll-free bridged with the Core Foundation type `CFRunLoopTimer` . As such, `NSTimer` objects c the `CFRunLoopTimer` pointer type, `CFRunLoopTimerRef` .

The timer doesn't have good resolution; its accuracy is a function of the run-loop and what's on it.

```
@interface NSTimer : NSObject
  // Convenience Constructors
    + (NSTimer *)timerWithTimeInterval:(NSTimeInterval)ti invocation:(NSInvocation *)inv
        repeats:(BOOL)yesOrNo;
    + (NSTimer *)timerWithTimeInterval:(NSTimeInterval)ti target:(id)aTarget selector:(S
        userInfo:(id)userInfo repeats:(BOOL)yesOrNo;
  // Initializers
    - (id)initWithFireDate:(NSDate *)date interval:(NSTimeInterval)ti target:(id)t selec
        userInfo:(id)ui repeats:(BOOL)rep;
  // Accessor Methods
    - (void)setFireDate:(NSDate *)date;
    - (NSDate *)fireDate;
  // Class Methods
    + (NSTimer *)scheduledTimerWithTimeInterval:(NSTimeInterval)ti invocation:(NSInvocat
        repeats:(BOOL)yesOrNo;
    + (NSTimer *)scheduledTimerWithTimeInterval:(NSTimeInterval)ti target:(id)aTarget se
        userInfo:(id)userInfo repeats:(BOOL)yesOrNo;
  // Instance Methods
    - (void)fire;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSTimeInterval)timeInterval;
- (void)invalidate;
- (BOOL)isValid;
- (id)userInfo;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSTimeZone — Mac OS X 10.0

This class represents a time zone-objects that store information about a geographic time zone, such as the name, abbreviation, time from GMT, whether or not daylight savings is in effect, and so on.

`NSTimeZone` is toll-free bridged with the Core Foundation type `CFTimeZone`. As such, `NSTimeZone` objects can be used interchangeably with the `CFTimeZone` pointer type, `CFTimeZoneRef`.

```
@interface NSTimeZone : NSObject <NSCoding, NSCopying>
 // Initializers
   - (id)initWithName:(NSString *)tzName;
   - (id)initWithName:(NSString *)tzName data:(NSData *)aData;
 // Class Methods
   + (NSDictionary *)abbreviationDictionary;
   + (NSTimeZone *)defaultTimeZone;
   + (NSArray *)knownTimeZoneNames;
   + (NSTimeZone *)localTimeZone;
   + (void)resetSystemTimeZone;
   + (void)setDefaultTimeZone:(NSTimeZone *)aTimeZone;
   + (NSTimeZone *)systemTimeZone;
   + (id)timeZoneForSecondsFromGMT:(int)seconds;
   + (id)timeZoneWithAbbreviation:(NSString *)abbreviation;
   + (id)timeZoneWithName:(NSString *)tzName;
   + (id)timeZoneWithName:(NSString *)tzName data:(NSData *)aData;
 // Instance Methods
   - (NSString *)abbreviation;
   - (NSString *)abbreviationForDate:(NSDate *)aDate;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSData *)data;
- (NSString *)description;
- (BOOL)isDaylightSavingTime;
- (BOOL)isDaylightSavingTimeForDate:(NSDate *)aDate;
- (BOOL)isEqualToTimeZone:(NSTimeZone *)aTimeZone;
- (NSString *)name;
- (int)secondsFromGMT;
- (int)secondsFromGMTForDate:(NSDate *)aDate;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSUnarchiver* *Mac OS X 10.0*

This concrete subclass of `NSCoder` is used to convert archived data (such as the data produced by `NSArchiver` ) into an object tree, which is restored to the state it was in prior to archiving.

```
@interface NSUnarchiver : NSCoder
 // Initializers
   - (id)initForReadingWithData:(NSData *)data;
 // Accessor Methods
   - (void)setObjectZone:(NSZone *)zone;
   - (NSZone *)objectZone;
 // Class Methods
   + (NSString *)classNameDecodedForArchiveClassName:(NSString *)inArchiveName;
   + (void)decodeClassName:(NSString *)inArchiveName asClassName:(NSString *)trueName;
   + (id)unarchiveObjectWithData:(NSData *)data;
   + (id)unarchiveObjectWithFile:(NSString *)path;
 // Instance Methods
   - (NSString *)classNameDecodedForArchiveClassName:(NSString *)inArchiveName;
   - (void)decodeClassName:(NSString *)inArchiveName asClassName:(NSString *)trueName;
   - (BOOL)isAtEnd;
   - (void)replaceObject:(id)object withObject:(id)newObject;
   - (unsigned)systemVersion;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSUndoManager* *Mac OS X 10.0*

This class provides the basis of Cocoa's undo and redo system. `NSUndoManager` supports two kinds of un simple undo and invocation-based undo. In *simple undo* clients `register` in the undo manager a target a selector that is used to undo the last operation. In *invocation based* undo the client creates an `NSInvocation` object that can undo the last operation and record that in the undo manager. In either ca it is the responsibility of the client to specify how the an operation is undone; `NSUndoManager` simply provides the machinery for keeping track of and executing the supplied selectors or invocations.

```
@interface NSUndoManager : NSObject
 // Accessor Methods
   - (void)setActionName:(NSString *)actionName;
   - (void)setGroupsByEvent:(BOOL)groupsByEvent;
   - (BOOL)groupsByEvent;
   - (void)setRunLoopModes:(NSArray *)runLoopModes;
   - (NSArray *)runLoopModes;
   - (void)setLevelsOfUndo:(unsigned)levels;
   - (unsigned)levelsOfUndo;
 // Instance Methods
   - (void)beginUndoGrouping;
   - (BOOL)canRedo;
   - (BOOL)canUndo;
   - (void)disableUndoRegistration;
   - (void)enableUndoRegistration;
   - (void)endUndoGrouping;
   - (void)forwardInvocation:(NSInvocation *)anInvocation;
   - (int)groupingLevel;
   - (BOOL)isRedoing;
   - (BOOL)isUndoRegistrationEnabled;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isUndoing;
- (id)prepareWithInvocationTarget:(id)target;
- (void)redo;
- (NSString *)redoActionName;
- (NSString *)redoMenuItemTitle;
- (NSString *)redoMenuTitleForUndoActionName:(NSString *)actionName;
- (void)registerUndoWithTarget:(id)target selector:(SEL)selector object:(id)anObjec
- (void)removeAllActions;
- (void)removeAllActionsWithTarget:(id)target;
- (void)undo;
- (NSString *)undoActionName;
- (NSString *)undoMenuItemTitle;
- (NSString *)undoMenuTitleForUndoActionName:(NSString *)actionName;
- (void)undoNestedGroup;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSUniqueIDSpecifier* *Mac OS X 10.2*

This class represents the scripting language reference form used to specify an object in a collection base

[redacted]

```
@interface NSUniqueIDSpecifier : NSScriptObjectSpecifier
 // Initializers
   - (id)initWithContainerClassDescription:(NSScriptClassDescription *)classDesc
       containerSpecifier:(NSScriptObjectSpecifier *)container key:(NSString *)proper
 // Accessor Methods
   - (void)setUniqueID:(id)uniqueID;
   - (id)uniqueID;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSURL

Mac OS X 10.0

NSURL is a class that represents a URL-the human-readable host names and paths that various networki clients use to locate both remote resources over a network, or resources on the local filesystem. Core Foundation has a type, CFURL , that is toll-free bridged to NSURL , and as such the two types can be used interchangeably.

```
@interface NSURL : NSObject
 // Accessor Methods
   - (BOOL)setResourceData:(NSData *)data;
   - (BOOL)setProperty:(id)property forKey:(NSString *)propertyKey;
 // Class Methods
   + (NSURL *)URLFromPasteboard:(NSPasteboard *)pasteBoard;
   + (id)URLWithString:(NSString *)URLString;
   + (id)URLWithString:(NSString *)URLString relativeToURL:(NSURL *)baseURL;
   + (id)fileURLWithPath:(NSString *)path;
 // Instance Methods
   - (NSURLHandle *)URLHandleUsingCache:(BOOL)shouldUseCache;
   - (id) initWithString:(NSString *)URLString;
   - (id) initWithString:(NSString *)URLString relativeToURL:(NSURL *)baseURL;
   - (NSString *)absoluteString;
   - (NSURL *)absoluteURL;
   - (NSURL *)baseURL;
   - (NSString *)fragment;
   - (NSString *)host;
   - (BOOL)isFileURL;
   - (void)loadResourceDataNotifyingClient:(id)client usingCache:(BOOL)shouldUseCache;
   - (NSString *)parameterString;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSString *)password;
- (id) initFileURLWithPath:(NSString *)path;
- (NSString *)path;
- (NSNumber *)port;
- (id)propertyForKey:(NSString *)propertyKey;
- (NSString *)query;
- (NSString *)relativePath;
- (NSString *)relativeString;
- (NSData *)resourceDataUsingCache:(BOOL)shouldUseCache;
- (NSString *)resourceSpecifier;
- (NSString *)scheme;
- (id) initWithScheme:(NSString *)scheme host:(NSString *)host path:(NSString *)path
- (NSURL *)standardizedURL;
- (NSString *)user;
- (void)writeToPasteboard:(NSPasteboard *)pasteBoard;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSURLHandle — Mac OS X 10.0

NSURLHandle provides an interface for uploading and downloading data to and from a resource specified by an NSURL. NSURLHandle actually offloads much of this work to subclasses that implement NSURLHandle's interface to work with various schemes.

```
@interface NSURLHandle : NSObject
 // Class Methods
   + (Class)URLHandleClassForURL:(NSURL *)anURL;
   + (NSURLHandle *)cachedHandleForURL:(NSURL *)anURL;
   + (BOOL)canInitWithURL:(NSURL *)anURL;
   + (void)registerURLHandleClass:(Class)anURLHandleSubclass;
 // Instance Methods
   - (void)addClient:(id <NSURLHandleClient>)client;
   - (id) initWithURL:(NSURL *)anURL cached:(BOOL)willCache;
   - (NSData *)availableResourceData;
   - (void)backgroundLoadDidFailWithReason:(NSString *)reason;
   - (void)beginLoadInBackground;
   - (void)cancelLoadInBackground;
   - (void)didLoadBytes:(NSData *)newBytes loadComplete:(BOOL)yorn;
   - (void)endLoadInBackground;
   - (NSString *)failureReason;
   - (void)flushCachedData;
   - (void)loadInBackground;
   - (NSData *)loadInForeground;
   - (id)propertyForKey:(NSString *)propertyKey;
   - (id)propertyForKeyIfAvailable:(NSString *)propertyKey;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (void)**removeClient**:(id <NSURLHandleClient>)*client*; |
| - (NSData *)**resourceData**; |
| - (NSURLHandleStatus)**status**; |
| - (BOOL)**writeData**:(NSData *)*data*; |
| - (BOOL)**writeProperty**:(id)*propertyValue* **forKey**:(NSString *)*propertyKey*; |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSUserDefaults* *Mac OS X 10.0*

This class is the entry-point into Mac OS X's user defaults database, which is how user preferences are stored and managed for applications. Instances of this class are created using the class method `standardUserDefaults` . This class provides methods for storing and accessing arrays, dictionaries, strings, objects, numbers, and data in an application's user defaults database.

```
@interface NSUserDefaults : NSObject
 // Initializers
   - (id)init;
   - (id)initWithUser:(NSString *)username;
 // Accessor Methods
   - (void)setInteger:(int)value forKey:(NSString *)defaultName;
   - (void)setVolatileDomain:(NSDictionary *)domain forName:(NSString *)domainName;
   - (void)setBool:(BOOL)value forKey:(NSString *)defaultName;
   - (void)setFloat:(float)value forKey:(NSString *)defaultName;
   - (void)setObject:(id)value forKey:(NSString *)defaultName;
   - (void)setPersistentDomain:(NSDictionary *)domain forName:(NSString *)domainName;
 // Class Methods
   + (void)resetStandardUserDefaults;
   + (NSUserDefaults *)standardUserDefaults;
 // Instance Methods
   - (void)addSuiteNamed:(NSString *)suiteName;
   - (NSArray *)arrayForKey:(NSString *)defaultName;
   - (BOOL)boolForKey:(NSString *)defaultName;
   - (NSData *)dataForKey:(NSString *)defaultName;
   - (NSDictionary *)dictionaryForKey:(NSString *)defaultName;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (NSDictionary *)**dictionaryRepresentation**; |
| - (float)**floatForKey**:(NSString *)*defaultName*; |
| - (int)**integerForKey**:(NSString *)*defaultName*; |
| - (id)**objectForKey**:(NSString *)*defaultName*; |
| - (BOOL)**objectIsForcedForKey**:(NSString *)*key*; |
| - (BOOL)**objectIsForcedForKey**:(NSString *)*key* **inDomain**:(NSString *)*domain*; |
| - (NSDictionary *)**persistentDomainForName**:(NSString *)*domainName*; |
| - (NSArray *)**persistentDomainNames**; |
| - (void)**registerDefaults**:(NSDictionary *)*registrationDictionary*; |
| - (void)**removeObjectForKey**:(NSString *)*defaultName*; |
| - (void)**removePersistentDomainForName**:(NSString *)*domainName*; |
| - (void)**removeSuiteNamed**:(NSString *)*suiteName*; |
| - (void)**removeVolatileDomainForName**:(NSString *)*domainName*; |
| - (NSArray *)**stringArrayForKey**:(NSString *)*defaultName*; |
| - (NSString *)**stringForKey**:(NSString *)*defaultName*; |
| - (BOOL)**synchronize**; |
| - (NSDictionary *)**volatileDomainForName**:(NSString *)*domainName*; |
| - (NSArray *)**volatileDomainNames**; |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSValue

Mac OS X 10.0

This class provides an object-oriented interface to C and Objective-Cscalar data items, such as numeric primitives, and C structures. Providing an object-oriented wrapper for these non-object types makes it possible for clients to store these types in any of the Foundation collection classes.

```
@interface NSValue : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (NSValue *)value:(const void *)value withObjCType:(const char *)type;
   + (NSValue *)valueWithBytes:(const void *)value objCType:(const char *)type;
   + (NSValue *)valueWithNonretainedObject:(id)anObject;
   + (NSValue *)valueWithPoint:(NSPoint)point;
   + (NSValue *)valueWithPointer:(const void *)pointer;
   + (NSValue *)valueWithRange:(NSRange)range;
   + (NSValue *)valueWithRect:(NSRect)rect;
   + (NSValue *)valueWithSize:(NSSize)size;
 // Initializers
   - (id)initWithBytes:(const void *)value objCType:(const char *)type;
 // Instance Methods
   - (void)getValue:(void *)value;
   - (BOOL)isEqualToValue:(NSValue *)value;
   - (id)nonretainedObjectValue;
   - (const char *)objCType;
   - (NSPoint)pointValue;
   - (void *)pointerValue;
   - (NSRange)rangeValue;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSRect)rectValue;
- (NSSize)sizeValue;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

## Subclasses

NSNumber

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSWhoseSpecifier* *Mac OS X 10.0*

This class represents the scripting language reference form used to specify a selection of objects within boolean condition. `NSWhoseSpecifier` works in conjunction with a test object that represents the matchi instance of a subclass of `NSScriptWhoseTest` .

```
@interface NSWhoseSpecifier : NSScriptObjectSpecifier
 // Initializers
   - (id)initWithContainerClassDescription:(NSScriptClassDescription *)classDesc
       containerSpecifier:(NSScriptObjectSpecifier *)container key:(NSString *)proper
 // Accessor Methods
   - (void)setStartSubelementIndex:(int)index;
   - (int)startSubelementIndex;
   - (void)setEndSubelementIndex:(int)index;
   - (int)endSubelementIndex;
   - (void)setEndSubelementIdentifier:(NSWhoseSubelementIdentifier)subelement;
   - (NSWhoseSubelementIdentifier)endSubelementIdentifier;
   - (void)setStartSubelementIdentifier:(NSWhoseSubelementIdentifier)subelement;
   - (NSWhoseSubelementIdentifier)startSubelementIdentifier;
   - (void)setTest:(NSScriptWhoseTest *)test;
   - (NSScglobal variables;iptWhoseTest *)test;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 14. Foundation Protocols

This chapter covers the protocols of the Foundation framework. The Foundation framework provides a basic set of classes used in data management, application coordination, networking and interapplication communication, as well as interacting with core operating system services. Chapter 2 discussed many Foundation classes in depth; Chapter 6 discussed several of the Foundation classes related to networking.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSCoding* *Mac OS X 10.0*

This protocol declares an interface is adopted by classes to provide forarchiving and unarchiving of instances of the class. The `NSCoding` protocol defines the two methods `initWithCode:` and `encodeWithCode:`. These two methods are the foundation of archiving and distribution in the Foundation framework. Each of these two methods passes an `NSCoder` object, which is used to perform archiving and unarchiving. The `NSCoder` class provides the tools to encode and decode objects and C and Objective-C data types. See the `NSCoder` class description and Chapter 2 for more information.

```
@protocol NSCoding
 // Instance Methods
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSComparisonMethods — Mac OS X 10.0

This informal protocol declares several methods that are used to perform common comparisons between two objects. In Cocoa's scripting system, comparisons are represented by instances of `NSSpecifierTest`, which relies on objects implementing either methods from this protocol, or the `NSScriptingComparisonMethods` protocol.

```
@interface NSObject (NSComparisonMethods)
 // Instance Methods
   - (BOOL)isEqualTo:(id)object;
   - (BOOL)isLessThanOrEqualTo:(id)object;
   - (BOOL)isLessThan:(id)object;
   - (BOOL)isGreaterThanOrEqualTo:(id)object;
   - (BOOL)isGreaterThan:(id)object;
   - (BOOL)isNotEqualTo:(id)object;
   - (BOOL)doesContain:(id)object;
   - (BOOL)isLike:(NSString *)object;
   - (BOOL)isCaseInsensitiveLike:(NSString *)object;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSCopying* *Mac OS X 10.0*

This protocol declares a single method for classes to implement `copyWithZone:`. Classes should implement this method to create and return a fully functioning object that is a copy of the receiver. The zone parameter indicates what memory zone the new object should be allocated in; if this parameter is `nil`, then the instance is allocated in the default zone. Clients generally makecopies of objects using `NSObject`'s `copy` method, which is a convenience method for invoking `copyWithZone:` with `nil` as the zone.

```
@protocol NSCopying
 // Instance Methods
   - (id)copyWithZone:(NSZone *)zone;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSDecimalNumberBehaviors* *Mac OS X 10.0*

This protocol defines the interface to objects that control aspects of the behavior of `NSDecimalNumber` ob
particular, there are three methods that classes implement to specify rounding behavior,number precisic
for handling calculation errors. The Foundation framework implements this protocol in the class `NSDecima`
.

```
@protocol NSDecimalNumberBehaviors
 // Instance Methods
   - (NSRoundingMode)roundingMode;
   - (short)scale;
   - (NSDecimalNumber *)exceptionDuringOperation:(SEL)operation error:(NSCalculationEr
           leftOperand:(NSDecimalNumber *)leftOperand rightOperand:(NSDecimalNumber *
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSKeyValueCoding* *Mac OS X 10.0*

This informal protocol provides a way for clients to access a class's instance variables (or other properties) without having to explicitly rely on accessor methods. `NSKeyValueCoding` provides indirect access to an object's instance variables through the use of strings or keys. The two most commonly used methods in the protocol are `takeValue:forKey:` and `valueForKey:`, which are used to set and get the value of an instance variable, respectively. This protocol, and the associated `NSScriptKeyValueCoding` protocol, both form the basis of scripting in Cocoa. Chapter 2 goes into more detail about this protocol.

```
@interface NSObject (NSKeyValueCoding)
 // Class Methods
   + (BOOL)accessInstanceVariablesDirectly;
   + (BOOL)useStoredAccessor;
 // Instance Methods
   - (id)valueForKey:(NSString *)key;
   - (void)takeValue:(id)value forKey:(NSString *)key;
   - (id)storedValueForKey:(NSString *)key;
   - (void)takeStoredValue:(id)value forKey:(NSString *)key;
   - (id)valueForKeyPath:(NSString *)key;
   - (void)takeValue:(id)value forKeyPath:(NSString *)key;
   - (NSDictionary *)valuesForKeys:(NSArray *)keys;
   - (void)takeValuesFromDictionary:(NSDictionary *)dictionary;
   - (id)handleQueryWithUnboundKey:(NSString *)key;
   - (void)handleTakeValue:(id)value forUnboundKey:(NSString *)key;
   - (void)unableToSetNilForKey:(NSString *)key;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSLocking* *Mac OS X 10.0*

This protocol is adopted by a class that implementslock objects. Locks are used in multithreaded applications to coordinate access to shared, thread-sensitive storage, or to control execution of critical portions of code (which usually deal with these same kinds of resources) that two or more threads may attempt to access simultaneously. The protocol declares two methods: `lock` and `unlock`. The `lock` message is used by clients to acquire a lock before executing critical sections of code, and the `unlock` method is used to relinquish a previously acquired lock.

The Foundation framework defines three classes that adopt the `NSLocking` protocol: `NSLock`, `NSConditionLock`, and `NSRecursiveLock`. See the class descriptions for these three classes, and Chapter 2 for more information.

```
@protocol NSLocking
 // Instance Methods
   - (void)lock;
   - (void)unlock;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSMutableCopying* *Mac OS X 10.0*

This protocol declares the single method `mutableCopyWithZone:`, which is implemented by classes that wish to allow clients to make mutable copies of themselves. This protocol should be adopted only by classes that have both mutable and immutable variants (for example, `NSString` and `NSMutableString`). Clients create mutable copies of objects through `NSObject`'s `mutableCopy` convenience method, which invokes `mutableCopyWithZone:` with the default zone.

```
@protocol NSMutableCopying
 // Instance Methods
   - (id)mutableCopyWithZone:(NSZone *)zone;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSObjCTypeSerializationCallBack* *Mac OS X 10.0*

This protocol is adopted by classes that wish to intervene inserialization and deserialization operations. I
been deprecated.

```
@protocol NSObjCTypeSerializationCallBack
 // Instance Methods
   - (void)serializeObjectAt:(id *)object ofObjCType:(const char *)type intoData:(NSMut
   - (void)deserializeObjectAt:(id *)object ofObjCType:(const char *)type fromData:(NSI
           atCursor:(unsigned *)cursor;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSObject* *Mac OS X 10.0*

This protocol defines the interface for so-called *first-class objects* . Objects that conform to the `NSObject` protocol are able to provide a great deal of information about themselves to other objects, such as their classnames, superclass names, and the protocols that they conform to. Additionally, this protocol declar methods that clients use to determine whether an object can respond to an arbitrary message. Finally, the `NSObject` protocol declares methods that allow objects to participate in Cocoa's memory manageme system. In the Foundation framework, the two root classes `NSObject` and `NSProxy` conform to this protocol.

```
@protocol NSObject
 // Instance Methods
   - (BOOL)isEqual:(id)object;
   - (unsigned)hash;
   - (Class)superclass;
   - (Class)class;
   - (id)self;
   - (NSZone *)zone;
   - (id)performSelector:(SEL)aSelector;
   - (id)performSelector:(SEL)aSelector withObject:(id)object;
   - (id)performSelector:(SEL)aSelector withObject:(id)object1 withObject:(id)object2;
   - (BOOL)isProxy;
   - (BOOL)isKindOfClass:(Class)aClass;
   - (BOOL)isMemberOfClass:(Class)aClass;
   - (BOOL)conformsToProtocol:(Protocol *)aProtocol;
   - (BOOL)respondsToSelector:(SEL)aSelector;
   - (id)retain;
   - (oneway void)release;
   - (id)autorelease;
   - (unsigned)retainCount;
   - (NSString *)description;
@end
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSScriptingComparisonMethods* *Mac OS X 10.0*

This informal protocol declares methods that are appropriate for use incomparing scriptable objects. Many Cocoa classes provide default implementations of these methods as part of the built-in support for scripting. This is especially true for the Foundation classes such as`NSString`, `NSNumber`, and `NSDate` that represent basic data types in a scripting environment. When a specifier test object evaluates a Boolean expression, it tries to invoke methods of this protocol in the relevant objects. If neither of the objects implement the necessary methods, then the scripting system will try to invoke methods from the `NSComparisonMethods` protocol.

```
@interface NSObject (NSScriptingComparisonMethods)
 // Instance Methods
   - (BOOL)scriptingIsEqualTo:(id)object;
   - (BOOL)scriptingIsLessThanOrEqualTo:(id)object;
   - (BOOL)scriptingIsLessThan:(id)object;
   - (BOOL)scriptingIsGreaterThanOrEqualTo:(id)object;
   - (BOOL)scriptingIsGreaterThan:(id)object;
   - (BOOL)scriptingBeginsWith:(id)object;
   - (BOOL)scriptingEndsWith:(id)object;
   - (BOOL)scriptingContains:(id)object;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSScriptKeyValueCoding* *Mac OS X 10.0*

This protocol defines additional key-value coding functionality beyond that of `NSKeyValueCoding` . The ac functionality provides support for scriptability in Cocoa.

```
@interface NSObject (NSScriptKeyValueCoding)
 // Instance Methods
   - (id)valueAtIndex:(unsigned)index inPropertyWithKey:(NSString *)key;
   - (id)valueWithName:(NSString *)name inPropertyWithKey:(NSString *)key;
   - (id)valueWithUniqueID:(id)uniqueID inPropertyWithKey:(NSString *)key;
   - (void)replaceValueAtIndex:(unsigned)index inPropertyWithKey:(NSString *)key withVa
   - (void)insertValue:(id)value atIndex:(unsigned)index inPropertyWithKey:(NSString *
   - (void)removeValueAtIndex:(unsigned)index fromPropertyWithKey:(NSString *)key;
   - (void)insertValue:(id)value inPropertyWithKey:(NSString *)key;
   - (id)coerceValue:(id)value forKey:(NSString *)key;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSScriptObjectSpecifiers* *Mac OS X 10.0*

This informal protocol declares two methods that classes implement to support scriptability. The two me
`objectSpecifier` and `indicesOfObjectsBy-EvaluatingObjectSpecifier` :. The `objectSpecifier` me
implemented, should return an instance of `NSObjectSpecifier` , while the second method listed below is
by container objects to return an `NSArray` of `NSNumbers` indicating the indices of objects within the conta
match the specifier indicated in the argument. See the class description of NSScriptObjectSpecifier in Cha
more information.

```
@interface NSObject (NSScriptObjectSpecifiers)
 // Instance Methods
   - (NSScriptObjectSpecifier *)objectSpecifier;
   - (NSArray *)indicesOfObjectsByEvaluatingObjectSpecifier:(NSScriptObjectSpecifier *
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSURLHandleClient* *Mac OS X 10.0*

This protocol defines methods that clients of `NSURLHandle` must implement to function as such. See Chap
more information.

```
@protocol NSURLHandleClient
 // Instance Methods
   - (void)URLHandle:(NSURLHandle *)sender resourceDataDidBecomeAvailable:(NSData *)new
   - (void)URLHandleResourceDidBeginLoading:(NSURLHandle *)sender;
   - (void)URLHandleResourceDidFinishLoading:(NSURLHandle *)sender;
   - (void)URLHandleResourceDidCancelLoading:(NSURLHandle *)sender;
   - (void)URLHandle:(NSURLHandle *)sender resourceDidFailLoadingWithReason:(NSString
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 15. Application Kit Classes

This chapter covers the classes of the Application Kit. The Application Kit implements all of the graphical user interface components of Cocoa, including the complete standard Aqua widget set. Additionally, the Application Kit provides classes for interacting with the Quartz 2D drawing system, and for managing and accessing resources such as colors, fonts, and printers. The Application Kit is discusses in Chapter 3. Chapter 4 and Chapter 5 go into more detail about aspects of the Application Kit.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSActionCell* *Mac OS X 10.0*

This subclass of `NSCell` provides an implementation of the target/action mechanism that is the basis of i
This mechanism operates by sending a message, often referred to as an *action message* to a *target* obje
the Application Kit rely on the functionality of `NSActionCell` to notify clients when the control has been a

While `NSCell` implements most of the methods found in `NSActionCells` , it does so only passively. `NSAc`
of `NSCell` 's methods to provide an active target/action mechanism and to manage the target and actio
managing these attributes of a cell, `NSActionCell` provides the necessary implementation to provide fee
as highlighting certain active areas of a control when the mouse hovers above them.

```
@interface NSActionCell : NSCell
 // Accessor Methods
   - (void)setFloatingPointFormat:(BOOL)autoRange left:(unsigned int)leftDigits right:(
   - (void)setAlignment:(NSTextAlignment)mode;
   - (void)setBordered:(BOOL)flag;
   - (void)setBezeled:(BOOL)flag;
   - (void)setEnabled:(BOOL)flag;
   - (void)setTag:(int)anInt;
   - (int)tag;
   - (void)setImage:(NSImage *)image;
   - (void)setTarget:(id)anObject;
   - (id)target;
   - (void)setAction:(SEL)aSelector;
   - (SEL)action;
   - (void)setObjectValue:(id)obj;
   - (void)setFont:(NSFont *)fontObj;
 // Instance Methods
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (double)doubleValue;
- (float)floatValue;
- (int)intValue;
- (NSString *)stringValue;
- (NSView *)controlView;
```

## Subclasses

NSButtonCell , NSFormCell , NSSliderCell , NSStepperCell , NSTextFieldCell

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSAffineTransform* *Mac OS X 10.0*

This class is used to perform affine transform operations on `NSBezierPath` objects, as well as on `NSSize`, and `NSPoint` structures. An *affine transform* is an operation in which one coordinate system is mapped to another whereby the parallelism of lines is maintained, but not necessarily their length or angles.

`NSAffineTransform` has methods for performing several types of operations: rotation, scaling, and translation. These transforms are implemented in the methods `scaleBy:`, `scaleXBy:yBy:`, `rotateByDegrees:`, `rotateByRadians:`, and `translateXBy:yBy:`. Additionally, applications may define their own transformation matrices using the method `setTransformStruct:`. To apply a transform to an object we use `transformBezierPath:`, `transformSize:`, and `transformPoint:`.

```
@interface NSAffineTransform : NSObject <NSCoding, NSCopying>
 // Initializers
   - (id)initWithTransform:(NSAffineTransform *)transform;
 // Accessor Methods
   - (void)setTransformStruct:(NSAffineTransformStruct)transformStruct;
   - (NSAffineTransformStruct)transformStruct;
 // Class Methods
   + (NSAffineTransform *)transform;
 // Instance Methods
   - (void)invert;
   - (void)concat;
   - (void)set;
   - (void)appendTransform:(NSAffineTransform *)transform;
   - (void)prependTransform:(NSAffineTransform *)transform;
   - (void)rotateByDegrees:(float)angle;
   - (void)rotateByRadians:(float)angle;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)scaleBy:(float)scale;
- (void)scaleXBy:(float)scaleX yBy:(float)scaleY;
- (NSBezierPath *)transformBezierPath:(NSBezierPath *)aPath;
- (NSPoint)transformPoint:(NSPoint)aPoint;
- (NSSize)transformSize:(NSSize)aSize;
- (void)translateXBy:(float)deltaX yBy:(float)deltaY;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# *NSApplication* *Mac OS X 10.0*

This is one of the three classes that define the overall architecture of the Application Kit, as well as the g applications. The other two classes are `NSView` and `NSResponder` . Every AppKit-based application has ar that is accessible through the global variable `NSApp` .

```
@interface NSApplication : NSResponder
 // Accessor Methods
   - (void)setMainMenu:(NSMenu *)aMenu;
   - (NSMenu *)mainMenu;
   - (void)setDelegate:(id)anObject;
   - (id)delegate;
   - (void)setWindowsNeedUpdate:(BOOL)needUpdate;
   - (void)setAppleMenu:(NSMenu *)menu;
   - (void)setApplicationIconImage:(NSImage *)image;
   - (NSImage *)applicationIconImage;
   - (void)setWindowsMenu:(NSMenu *)aMenu;
   - (NSMenu *)windowsMenu;
   - (void)setServicesMenu:(NSMenu *)aMenu;
   - (NSMenu *)servicesMenu;
   - (void)setServicesProvider:(id)provider;
   - (id)servicesProvider;
 // Class Methods
   + (void)detachDrawingThread:(SEL)selector toTarget:(id)target withObject:(id)argume
   + (NSApplication *)sharedApplication;
 // Instance Methods
   - (NSModalSession)beginModalSessionForWindow:(NSWindow *)theWindow;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)activateContextHelpMode:(id)sender;
- (void)abortModal;
- (void)activateIgnoringOtherApps:(BOOL)flag;
- (void)addWindowsItem:(NSWindow *)win title:(NSString *)aString filename:(BOOL)isF
- (void)arrangeInFront:(id)sender;
- (NSModalSession)beginModalSessionForWindow:(NSWindow *)theWindow
    relativeToWindow:(NSWindow *)docWindow;
- (void)beginSheet:(NSWindow *)sheet modalForWindow:(NSWindow *)docWindow modalDele
    didEndSelector:(SEL)didEndSelector  contextInfo:(void *)contextInfo;
- (void)cancelUserAttentionRequest:(int)request;
- (void)changeColor:(id)sender;
- (void)changeWindowsItem:(NSWindow *)win title:(NSString *)aString filename:(BOOL).
- (NSGraphicsContext*)context;
- (NSEvent *)currentEvent;
- (void)deactivate;
- (void)discardEventsMatchingMask:(unsigned int)mask  beforeEvent:(NSEvent *)lastEve
- (void)endModalSession:(NSModalSession)session;
- (void)endSheet:(NSWindow *)sheet;
- (void)endSheet:(NSWindow *)sheet  returnCode:(int)returnCode;
- (void)finishLaunching;
- (void)hide:(id)sender;
- (void)hideOtherApplications:(id)sender;
- (BOOL)isActive;
- (BOOL)isHidden;
- (BOOL)isRunning;
- (NSWindow *)keyWindow;
- (NSWindow *)mainWindow;
- (NSWindow *)makeWindowsPerform:(SEL)aSelector inOrder:(BOOL)flag;
- (void)miniaturizeAll:(id)sender;
- (NSWindow *)modalWindow;
- (NSEvent *)nextEventMatchingMask:(unsigned int)mask untilDate:(NSDate *)expiratio
    dequeue:(BOOL)deqFlag;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)orderFrontColorPanel:(id)sender;
- (void)orderFrontStandardAboutPanel:(id)sender;
- (void)orderFrontStandardAboutPanelWithOptions:(NSDictionary *)optionsDictionary;
- (void)postEvent:(NSEvent *)event atStart:(BOOL)flag;
- (void)preventWindowOrdering;
- (void)registerServicesMenuSendTypes:(NSArray *)sendTypes returnTypes:(NSArray *)re
- (void)removeWindowsItem:(NSWindow *)win;
- (void)replyToApplicationShouldTerminate:(BOOL)shouldTerminate;
- (void)reportException:(NSException *)theException;
- (int)requestUserAttention:(NSRequestUserAttentionType)requestType;
- (void)run;
- (int)runModalForWindow:(NSWindow *)theWindow;
- (int)runModalForWindow:(NSWindow *)theWindow relativeToWindow:(NSWindow *)docWind
- (int)runModalSession:(NSModalSession)session;
- (void)runPageLayout:(id)sender;
- (BOOL)sendAction:(SEL)theAction to:(id)theTarget from:(id)sender;
- (void)sendEvent:(NSEvent *)theEvent;
- (void)showHelp:(id)sender;
- (void)stop:(id)sender;
- (void)stopModal;
- (void)stopModalWithCode:(int)returnCode;
- (id)targetForAction:(SEL)theAction;
- (id)targetForAction:(SEL)theAction to:(id)theTarget from:(id)sender;
- (void)terminate:(id)sender;
- (BOOL)tryToPerform:(SEL)anAction with:(id)anObject;
- (void)unhide:(id)sender;
- (void)unhideAllApplications:(id)sender;
- (void)unhideWithoutActivation;
- (void)updateWindows;
- (void)updateWindowsItem:(NSWindow *)win;
- (id)validRequestorForSendType:(NSString *)sendType
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
    returnType:(NSString *)returnType;
- (NSWindow *)windowWithWindowNumber:(int)windowNum;
- (NSArray *)windows;
// Methods Implemented by the Delegate
- (BOOL)application:(NSApplication *)sender delegateHandlesKey:(NSString *)key;
- (BOOL)application:(NSApplication *)sender openFile:(NSString *)filename;
- (BOOL)application:(NSApplication *)sender openTempFile:(NSString *)filename;
- (BOOL)application:(NSApplication *)sender printFile:(NSString *)filename;
- (BOOL)application:(id)sender openFileWithoutUI:(NSString *)filename;
- (void)applicationDidBecomeActive:(NSNotification *)notification;
- (void)applicationDidChangeScreenParameters:(NSNotification *)notification;
- (void)applicationDidFinishLaunching:(NSNotification *)notification;
- (void)applicationDidHide:(NSNotification *)notification;
- (void)applicationDidResignActive:(NSNotification *)notification;
- (void)applicationDidUnhide:(NSNotification *)notification;
- (void)applicationDidUpdate:(NSNotification *)notification;
- (NSMenu *)applicationDockMenu:(NSApplication *)sender;
- (BOOL)applicationOpenUntitledFile:(NSApplication *)sender;
- (BOOL)applicationShouldHandleReopen:(NSApplication *)sender hasVisibleWindows:(BOO
- (BOOL)applicationShouldOpenUntitledFile:(NSApplication *)sender;
- (NSApplicationTerminateReply)applicationShouldTerminate:(NSApplication *)sender;
- (BOOL)applicationShouldTerminateAfterLastWindowClosed:(NSApplication *)sender;
- (void)applicationWillBecomeActive:(NSNotification *)notification;
- (void)applicationWillFinishLaunching:(NSNotification *)notification;
- (void)applicationWillHide:(NSNotification *)notification;
- (void)applicationWillResignActive:(NSNotification *)notification;
- (void)applicationWillTerminate:(NSNotification *)notification;
- (void)applicationWillUnhide:(NSNotification *)notification;
- (void)applicationWillUpdate:(NSNotification *)notification;
// Notifications
NSApplicationDidBecomeActiveNotification;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| NSApplicationDidChangeScreenParametersNotification; |
| NSApplicationDidFinishLaunchingNotification; |
| NSApplicationDidHideNotification; |
| NSApplicationDidResignActiveNotification; |
| NSApplicationDidUnhideNotification; |
| NSApplicationDidUpdateNotification; |
| NSApplicationWillBecomeActiveNotification; |
| NSApplicationWillFinishLaunchingNotification; |
| NSApplicationWillHideNotification; |
| NSApplicationWillResignActiveNotification; |
| NSApplicationWillTerminateNotification; |
| NSApplicationWillUnhideNotification; |
| NSApplicationWillUpdateNotification; |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSBezierPath* *Mac OS X 10.0*

This class represents Bezier paths that are vector-based paths based on polynomial formulas. Vector paths are the basis of Quartz 2D. As such, this class provides the most general interface to Quartz 2D from Cocoa.

A Bezier path is constructed from path elements. Complex paths are constructed by appending lines and curves to the path. It is also possible to move to a point, thus creating a broken space in the path. Lines are appended to a path using the method `lineToPoint:`. Curves are appended using the method `curveToPoint:controlPoint1:controlPoint2:`. To move to a new location on the canvas, use the method `moveToPoint:`. In all of these methods, the point referred to is the end point of the element; the starting point is implicitly specified as the endpoint of the last element in the path. Chapter 4 provides a more detailed discussion on the use of `NSBezierPath` for drawing.

```
@interface NSBezierPath : NSObject <NSCoding, NSCopying>
 // Accessor Methods
   - (void)setMiterLimit:(float)miterLimit;
   - (float)miterLimit;
   - (void)setLineDash:(const float *)pattern count:(int)count phase:(float)phase;
   - (void)setCachesBezierPath:(BOOL)flag;
   - (BOOL)cachesBezierPath;
   - (void)setClip;
   - (void)setLineWidth:(float)lineWidth;
   - (float)lineWidth;
   - (void)setWindingRule:(NSWindingRule)windingRule;
   - (NSWindingRule)windingRule;
   - (void)setLineJoinStyle:(NSLineJoinStyle)lineJoinStyle;
   - (NSLineJoinStyle)lineJoinStyle;
   - (void)setAssociatedPoints:(NSPointArray)points atIndex:(int)index;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setLineCapStyle:(NSLineCapStyle)lineCapStyle;
- (NSLineCapStyle)lineCapStyle;
- (void)setFlatness:(float)flatness;
- (float)flatness;
// Class Methods
+ (NSBezierPath *)bezierPath;
+ (NSBezierPath *)bezierPathWithOvalInRect:(NSRect)rect;
+ (NSBezierPath *)bezierPathWithRect:(NSRect)rect;
+ (void)clipRect:(NSRect)rect;
+ (float)defaultFlatness;
+ (NSLineCapStyle)defaultLineCapStyle;
+ (NSLineJoinStyle)defaultLineJoinStyle;
+ (float)defaultLineWidth;
+ (float)defaultMiterLimit;
+ (NSWindingRule)defaultWindingRule;
+ (void)drawPackedGlyphs:(const char *)packedGlyphs atPoint:(NSPoint)point;
+ (void)fillRect:(NSRect)rect;
+ (void)setDefaultFlatness:(float)flatness;
+ (void)setDefaultLineCapStyle:(NSLineCapStyle)lineCapStyle;
+ (void)setDefaultLineJoinStyle:(NSLineJoinStyle)lineJoinStyle;
+ (void)setDefaultLineWidth:(float)lineWidth;
+ (void)setDefaultMiterLimit:(float)limit;
+ (void)setDefaultWindingRule:(NSWindingRule)windingRule;
+ (void)strokeLineFromPoint:(NSPoint)point1 toPoint:(NSPoint)point2;
+ (void)strokeRect:(NSRect)rect;
// Instance Methods
- (void)addClip;
- (void)appendBezierPath:(NSBezierPath *)path;
- (void)appendBezierPathWithArcFromPoint:(NSPoint)point1;
- (void)appendBezierPathWithArcWithCenter:(NSPoint)center radius:(float)radius;
- (void)appendBezierPathWithArcWithCenter:(NSPoint)center radius:(float)radius;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)appendBezierPathWithGlyph:(NSGlyph)glyph inFont:(NSFont *)font;
- (void)appendBezierPathWithGlyphs:(NSGlyph *)glyphs count:(int)count;
- (void)appendBezierPathWithOvalInRect:(NSRect)rect;
- (void)appendBezierPathWithPackedGlyphs:(const char *)packedGlyphs;
- (void)appendBezierPathWithPoints:(NSPointArray)points count:(int)count;
- (void)appendBezierPathWithRect:(NSRect)rect;
- (NSBezierPath *)bezierPathByFlatteningPath;
- (NSBezierPath *)bezierPathByReversingPath;
- (NSRect)bounds;
- (void)closePath;
- (NSPoint)currentPoint;
- (NSBezierPathElement)elementAtIndex:(int)index;
- (NSBezierPathElement)elementAtIndex:(int)index;
- (int)elementCount;
- (void)fill;
- (void)getLineDash:(float *)pattern count:(int *)count phase:(float *)phase;
- (BOOL)isEmpty;
- (void)lineToPoint:(NSPoint)point;
- (void)moveToPoint:(NSPoint)point;
- (void)relativeCurveToPoint:(NSPoint)endPoint;
- (void)relativeLineToPoint:(NSPoint)point;
- (void)relativeMoveToPoint:(NSPoint)point;
- (void)removeAllPoints;
- (void)stroke;
- (void)transformUsingAffineTransform:(NSAffineTransform *)transform;
- (BOOL)containsPoint:(NSPoint)point;
- (NSRect)controlPointBounds;
- (void)curveToPoint:(NSPoint)endPoint;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSBitmapImageRep* *Mac OS X 10.0*

This subclass of `NSImageRep` represents bitmapped raster images. `NSBitmapImageRep` is able to read and
of the popular bitmap image data formats: TIFF, JPEG, Windows Bitmap, PNG, as well as raw data. This
create bitmap image buffers that can be manipulated programmatically, and is thus useful for image ma
applications. To obtain a pointer to the image data buffer, use the method `bitmapData` . If the image dat
rather than interlaced, use the method `getBitmapDataPlanes` :, which returns a C array of pointers to t
`NSBitmapImageRep` provides a number of methods for discovering characteristics of the image data, suc
sample formats, and more. See Chapter 4 for more information on how Cocoa handles images.

```
@interface NSBitmapImageRep : NSImageRep
 // Initializers
   - (id)initForIncrementalLoad;
   - (id)initWithBitmapDataPlanes:(unsigned char **)planes pixelsWide:(int)width pixel
       bitsPerSample:(int)bps samplesPerPixel:(int)spp hasAlpha:(BOOL)alpha isPlanar:
       colorSpaceName:(NSString *)colorSpaceName bytesPerRow:(int)rBytes bitsPerPixel
   - (id)initWithData:(NSData *)tiffData;
   - (id)initWithFocusedViewRect:(NSRect)rect;
 // Accessor Methods
   - (void)setCompression:(NSTIFFCompression)compression factor:(float)factor;
   - (void)setProperty:(NSString *)property withValue:(id)value;
 // Class Methods
   + (NSData *)TIFFRepresentationOfImageRepsInArray:(NSArray *)array;
   + (NSData *)TIFFRepresentationOfImageRepsInArray:(NSArray *)array usingCompression:
   + (void)getTIFFCompressionTypes:(const NSTIFFCompression **)list count:(int *)numTy
   + (id)imageRepWithData:(NSData *)tiffData;
   + (NSArray *)imageRepsWithData:(NSData *)tiffData;
   + (NSString *)localizedNameForTIFFCompressionType:(NSTIFFCompression)compression;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSData *)representationOfImageRepsInArray:(NSArray *)imageReps
    usingType:(NSBitmapImageFileType)storageType properties:(NSDictionary *)propert
// Instance Methods
- (NSData *)TIFFRepresentation;
- (NSData *)TIFFRepresentationUsingCompression:(NSTIFFCompression)comp  factor:(flo
- (unsigned char *)bitmapData;
- (int)bytesPerRow;
- (int)bitsPerPixel;
- (int)bytesPerPlane;
- (BOOL)canBeCompressedUsing:(NSTIFFCompression)compression;
- (void)colorizeByMappingGray:(float)midPoint toColor:(NSColor *)midPointColor
    blackMapping:(NSColor *)shadowColor whiteMapping:(NSColor *)lightColor;
- (void)getBitmapDataPlanes:(unsigned char **)data;
- (void)getCompression:(NSTIFFCompression *)compression factor:(float *)factor;
- (int)incrementalLoadFromData:(NSData*)data complete:(BOOL)complete;
- (BOOL)isPlanar;
- (int)numberOfPlanes;
- (NSData *)representationUsingType:(NSBitmapImageFileType)storageType
    properties:(NSDictionary *)properties;
- (int)samplesPerPixel;
- (id)valueForProperty:(NSString *)property;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSBox

Mac OS X 10.0

This simple subclass of NSView performs two tasks: it can draw a border around itself, as well as title itself. By specifying that the box should have no border or title, NSBox views can be used to transparentlly group other NSView objects by making them subviews of the box view. Interface Builder provides facilities for using NSBox to group views.

```
@interface NSBox : NSView
 // Accessor Methods
   - (void)setTitle:(NSString *)aString;
   - (NSString *)title;
   - (void)setBorderType:(NSBorderType)aType;
   - (NSBorderType)borderType;
   - (void)setBoxType:(NSBoxType)boxType;
   - (NSBoxType)boxType;
   - (void)setTitlePosition:(NSTitlePosition)aPosition;
   - (NSTitlePosition)titlePosition;
   - (void)setFrameFromContentFrame:(NSRect)contentFrame;
   - (void)setTitleFont:(NSFont *)fontObj;
   - (NSFont *)titleFont;
   - (void)setContentView:(NSView *)aView;
   - (id)contentView;
   - (void)setContentViewMargins:(NSSize)offsetSize;
   - (NSSize)contentViewMargins;
 // Instance Methods
   - (NSRect)borderRect;
   - (void)sizeToFit;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id)titleCell;
```

```
- (NSRect)titleRect;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSBrowser

Mac OS X 10.0

This NSControl subclass represents an interface widget that displayshierarchical data in a series of colu Column View in the Finder. If the data is not hierarchical, thenNSBrowser displays the data as a list. Dat a browser by its delegate object.

```
@interface NSBrowser : NSControl
 // Accessor Methods
   - (void)setTitle:(NSString *)aString ofColumn:(int)column;
   - (void)setDoubleAction:(SEL)aSelector;
   - (SEL)doubleAction;
   - (void)setMatrixClass:(Class)factoryId;
   - (Class)matrixClass;
   - (void)setPathSeparator:(NSString *)newString;
   - (NSString *)pathSeparator;
   - (void)setCellClass:(Class)factoryId;
   - (void)setCellPrototype:(NSCell *)aCell;
   - (id)cellPrototype;
   - (void)setDelegate:(id)anObject;
   - (id)delegate;
   - (void)setReusesColumns:(BOOL)flag;
   - (BOOL)reusesColumns;
   - (void)setHasHorizontalScroller:(BOOL)flag;
   - (BOOL)hasHorizontalScroller;
   - (void)setSeparatesColumns:(BOOL)flag;
   - (BOOL)separatesColumns;
   - (void)setTitled:(BOOL)flag;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setMinColumnWidth:(float)columnWidth;
- (float)minColumnWidth;
- (void)setMaxVisibleColumns:(int)columnCount;
- (int)maxVisibleColumns;
- (void)setSendsActionOnArrowKeys:(BOOL)flag;
- (BOOL)sendsActionOnArrowKeys;
- (void)setAllowsMultipleSelection:(BOOL)flag;
- (BOOL)allowsMultipleSelection;
- (void)setAllowsBranchSelection:(BOOL)flag;
- (BOOL)allowsBranchSelection;
- (void)setAllowsEmptySelection:(BOOL)flag;
- (BOOL)allowsEmptySelection;
- (void)setTakesTitleFromPreviousColumn:(BOOL)flag;
- (BOOL)takesTitleFromPreviousColumn;
- (void)setAcceptsArrowKeys:(BOOL)flag;
- (BOOL)acceptsArrowKeys;
- (BOOL)setPath:(NSString *)path;
- (NSString *)path;
- (void)setLastColumn:(int)column;
- (int)lastColumn;
// Class Methods
+ (Class)cellClass;
// Instance Methods
- (NSRect)frameOfColumn:(int)column;
- (void)doDoubleClick:(id)sender;
- (void)doClick:(id)sender;
- (void)displayColumn:(int)column;
- (void)addColumn;
- (void)displayAllColumns;
- (int)columnOfMatrix:(NSMatrix *)matrix;
- (void)drawTitleOfColumn:(int)column inRect:(NSRect)aRect;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (int)firstVisibleColumn;
- (NSRect)frameOfInsideOfColumn:(int)column;
- (BOOL)isLoaded;
- (BOOL)isTitled;
- (int)lastVisibleColumn;
- (void)loadColumnZero;
- (id)loadedCellAtRow:(int)row column:(int)col;
- (NSMatrix *)matrixInColumn:(int)column;
- (int)numberOfVisibleColumns;
- (NSString *)pathToColumn:(int)column;
- (void)reloadColumn:(int)column;
- (void)scrollColumnToVisible:(int)column;
- (void)scrollColumnsLeftBy:(int)shiftAmount;
- (void)scrollColumnsRightBy:(int)shiftAmount;
- (void)scrollViaScroller:(NSScroller *)sender;
- (void)selectAll:(id)sender;
- (void)selectRow:(int)row inColumn:(int)column;
- (id)selectedCell;
- (id)selectedCellInColumn:(int)column;
- (NSArray *)selectedCells;
- (int)selectedColumn;
- (int)selectedRowInColumn:(int)column;
- (BOOL)sendAction;
- (void)tile;
- (NSRect)titleFrameOfColumn:(int)column;
- (float)titleHeight;
- (NSString *)titleOfColumn:(int)column;
- (void)updateScroller;
- (void)validateVisibleColumns;
// Methods Implemented by the Delegate
- (void)browser:(NSBrowser *)sender createRowsForColumn:(int)column inMatrix:(NSMat
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)browser:(NSBrowser *)sender  isColumnValid:(int)column;
- (int)browser:(NSBrowser *)sender numberOfRowsInColumn:(int)column;
- (BOOL)browser:(NSBrowser *)sender selectCellWithString:(NSString *)title inColumn
- (BOOL)browser:(NSBrowser *)sender selectRow:(int)row inColumn:(int)column;
- (NSString *)browser:(NSBrowser *)sender titleOfColumn:(int)column;
- (void)browser:(NSBrowser *)sender willDisplayCell:(id)cell atRow:(int)row column:
- (void)browserDidScroll:(NSBrowser *)sender;
- (void)browserWillScroll:(NSBrowser *)sender;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSBrowserCell — Mac OS X 10.0

Instances of this class are responsible for displaying the contents ofcolumns in an `NSBrowser`, which are `NSMatrix` views containing a stack of `NSBrowserCell` objects.

```
@interface NSBrowserCell : NSCell
 // Accessor Methods
   - (void)setLeaf:(BOOL)flag;
   - (void)setAlternateImage:(NSImage *)newAltImage;
   - (NSImage *)alternateImage;
   - (void)setLoaded:(BOOL)flag;
   - (void)setImage:(NSImage *)image;
   - (NSImage *)image;
 // Class Methods
   + (NSImage *)branchImage;
   + (NSImage *)highlightedBranchImage;
 // Instance Methods
   - (void)set;
   - (NSColor *)highlightColorInView:(NSView *)controlView;
   - (BOOL)isLeaf;
   - (BOOL)isLoaded;
   - (void)reset;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSButton

Mac OS X 10.0

This NSControl subclass represents a button control in the user interface. A button works by sending out an action message whenever a mouse-down and mouse-up event occurs within the button area. The associated NSCell subclass for NSButton is NSButtonCell, described next.

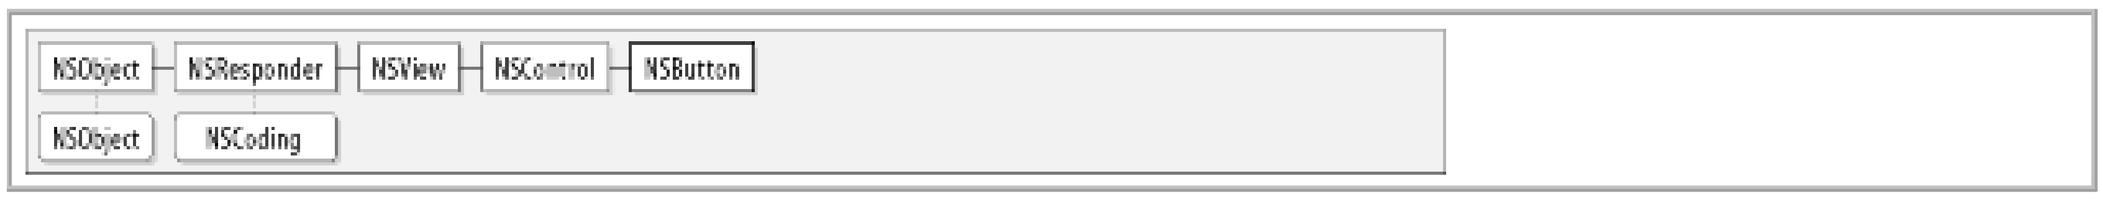


```
@interface NSButton : NSControl
 // Accessor Methods
   - (void)setImagePosition:(NSCellImagePosition)aPosition;
   - (NSCellImagePosition)imagePosition;
   - (void)setTitle:(NSString *)aString;
   - (NSString *)title;
   - (void)setAlternateTitle:(NSString *)aString;
   - (NSString *)alternateTitle;
   - (void)setKeyEquivalentModifierMask:(unsigned int)mask;
   - (unsigned int)keyEquivalentModifierMask;
   - (void)setImage:(NSImage *)image;
   - (NSImage *)image;
   - (void)setAlternateImage:(NSImage *)image;
   - (NSImage *)alternateImage;
   - (void)setKeyEquivalent:(NSString *)charCode;
   - (NSString *)keyEquivalent;
   - (void)setAttributedTitle:(NSAttributedString *)aString;
   - (NSAttributedString *)attributedTitle;
   - (void)setAllowsMixedState:(BOOL)flag;
   - (BOOL)allowsMixedState;
   - (void)setAttributedAlternateTitle:(NSAttributedString *)obj;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSAttributedString *)attributedAlternateTitle;
- (void)setBordered:(BOOL)flag;
- (void)setSound:(NSSound *)aSound;
- (NSSound *)sound;
- (void)setPeriodicDelay:(float)delay interval:(float)interval;
- (void)setTransparent:(BOOL)flag;
- (void)setButtonType:(NSButtonType)aType;
- (void)setState:(int)value;
- (int)state;
- (void)setNextState;
// Instance Methods
- (BOOL)showsBorderOnlyWhileMouseInside;
- (NSBezelStyle)bezelStyle;
- (void)getPeriodicDelay:(float *)delay interval:(float *)interval;
- (void)highlight:(BOOL)flag;
- (BOOL)isBordered;
- (BOOL)isTransparent;
- (void)setBezelStyle:(NSBezelStyle)bezelStyle;
- (void)setShowsBorderOnlyWhileMouseInside:(BOOL)show;
- (BOOL)performKeyEquivalent:(NSEvent *)key;
```

## Subclasses

NSPopUpButton

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSButtonCell — Mac OS X 10.0

This subclass of NSActionCell contains the majority of the functionality of a button control. NSButtonCell, like most NSCell subclasses, is responsible for the appearance of the NSButton control; NSButton serves more as a view for NSButtonCell to draw in, and most of NSButton's API is forwarded to NSButtonCell.

```
@interface NSButtonCell : NSActionCell
 // Accessor Methods
   - (void)setPeriodicDelay:(float)delay interval:(float)interval;
   - (void)setTitle:(NSString *)aString;
   - (NSString *)title;
   - (void)setAlternateTitle:(NSString *)aString;
   - (NSString *)alternateTitle;
   - (void)setImagePosition:(NSCellImagePosition)aPosition;
   - (NSCellImagePosition)imagePosition;
   - (void)setHighlightsBy:(int)aType;
   - (int)highlightsBy;
   - (void)setAttributedAlternateTitle:(NSAttributedString *)obj;
   - (NSAttributedString *)attributedAlternateTitle;
   - (void)setAttributedTitle:(NSAttributedString *)obj;
   - (NSAttributedString *)attributedTitle;
   - (void)setTransparent:(BOOL)flag;
   - (void)setSound:(NSSound *)aSound;
   - (NSSound *)sound;
   - (void)setKeyEquivalent:(NSString *)aKeyEquivalent;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSString *)keyEquivalent;
- (void)setKeyEquivalentModifierMask:(unsigned int)mask;
- (unsigned int)keyEquivalentModifierMask;
- (void)setKeyEquivalentFont:(NSFont *)fontObj;
- (NSFont *)keyEquivalentFont;
- (void)setKeyEquivalentFont:(NSString *)fontName size:(float)fontSize;
- (void)setGradientType:(NSGradientType)type;
- (NSGradientType)gradientType;
- (void)setImageDimsWhenDisabled:(BOOL)flag;
- (BOOL)imageDimsWhenDisabled;
- (void)setAlternateImage:(NSImage *)image;
- (NSImage *)alternateImage;
- (void)setShowsStateBy:(int)aType;
- (int)showsStateBy;
- (void)setButtonType:(NSButtonType)aType;
- (void)setFont:(NSFont *)fontObj;
// Instance Methods
- (BOOL)showsBorderOnlyWhileMouseInside;
- (BOOL)isOpaque;
- (BOOL)isTransparent;
- (void)getPeriodicDelay:(float *)delay interval:(float *)interval;
- (void)performClick:(id)sender;
- (NSBezelStyle)bezelStyle;
- (void)mouseEntered:(NSEvent*)event;
- (void)mouseExited:(NSEvent*)event;
- (void)setBezelStyle:(NSBezelStyle)bezelStyle;
- (void)setShowsBorderOnlyWhileMouseInside:(BOOL)show;
```

## Subclasses

NSMenuItemCell

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSCachedImageRep* *Mac OS X 10.0*

This subclass of `NSImageRep` stores an image's data representation as an image that has been rendered which is usually an off-screen window. Images represented by `NSCachedImageRep` can be redrawn very q have already been rendered to the screen environment.

```
@interface NSCachedImageRep : NSImageRep
 // Initializers
   - (id)initWithSize:(NSSize)size depth:(NSWindowDepth)depth separate:(BOOL)flag alpha
   - (id)initWithWindow:(NSWindow *)win rect:(NSRect)rect;
 // Instance Methods
   - (NSRect)rect;
   - (NSWindow *)window;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# *NSCell* *Mac OS X 10.0*

This class is the base superclass for the hierarchy of lightweight objects that know how to draw into a vi Application Kit defer the implementation of drawing to an associated `NSCell` . For example, `NSButton` us `NSButtonCell` , to handle all of the drawing and event handling of a button interface component. Cells p views in situations when a control appears repeatedly in a view. The interface of `NSCell` is closely mirror concrete subclasses of `NSControl` forward most messages to their associated `NSCell` object.

```
@interface NSCell : NSObject <NSCoding, NSCopying>
 // Initializers
   - (id)initImageCell:(NSImage *)image;
   - (id)initTextCell:(NSString *)aString;
 // Accessor Methods
   - (void)setBezeled:(BOOL)flag;
   - (void)setType:(NSCellType)aType;
   - (NSCellType)type;
   - (void)setCellAttribute:(NSCellAttribute)aParameter to:(int)value;
   - (void)setAllowsMixedState:(BOOL)flag;
   - (BOOL)allowsMixedState;
   - (void)setTarget:(id)anObject;
   - (id)target;
   - (void)setAction:(SEL)aSelector;
   - (SEL)action;
   - (void)setImportsGraphics:(BOOL)flag;
   - (BOOL)importsGraphics;
   - (void)setTag:(int)anInt;
   - (int)tag;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setTitle:(NSString*)aString;
- (NSString*)title;
- (void)setAllowsEditingTextAttributes:(BOOL)flag;
- (BOOL)allowsEditingTextAttributes;
- (void)setEnabled:(BOOL)flag;
- (void)setRepresentedObject:(id)anObject;
- (id)representedObject;
- (void)setAttributedStringValue:(NSAttributedString *)obj;
- (NSAttributedString *)attributedStringValue;
- (void)setSelectable:(BOOL)flag;
- (void)setBordered:(BOOL)flag;
- (void)setDoubleValue:(double)aDouble;
- (double)doubleValue;
- (void)setScrollable:(BOOL)flag;
- (void)setSendsActionOnEndEditing:(BOOL)flag;
- (BOOL)sendsActionOnEndEditing;
- (void)setHighlighted:(BOOL)flag;
- (void)setAlignment:(NSTextAlignment)mode;
- (NSTextAlignment)alignment;
- (void)setWraps:(BOOL)flag;
- (BOOL)wraps;
- (void)setImage:(NSImage *)image;
- (NSImage *)image;
- (void)setEntryType:(int)aType;
- (int)entryType;
- (NSText *)setUpFieldEditorAttributes:(NSText *)textObj;
- (void)setFloatingPointFormat:(BOOL)autoRange left:(unsigned)leftDigits right:(unsi
- (void)setFormatter:(NSFormatter *)newFormatter;
- (id)formatter;
- (void)setStringValue:(NSString *)aString;
- (NSString *)stringValue;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setIntValue:(int)anInt;
- (int)intValue;
- (void)setFloatValue:(float)aFloat;
- (float)floatValue;
- (void)setObjectValue:(id <NSCopying>)obj;
- (id <NSCopying>)objectValue;
- (void)setMenu:(NSMenu *)aMenu;
- (NSMenu *)menu;
- (void)setFont:(NSFont *)fontObj;
- (NSFont *)font;
- (void)setControlSize:(NSControlSize)size;
- (NSControlSize)controlSize;
- (void)setContinuous:(BOOL)flag;
- (void)setState:(int)value;
- (int)state;
- (void)setNextState;
- (int)nextState;
- (void)setEditable:(BOOL)flag;
// Class Methods
+ (NSMenu *)defaultMenu;
+ (BOOL)prefersTrackingUntilMouseUp;
// Instance Methods
- (NSSize)cellSize;
- (NSColor *)highlightColorWithFrame:(NSRect)cellFrame inView:(NSView *)controlView
- (NSRect)imageRectForBounds:(NSRect)theRect;
- (BOOL)isEnabled;
- (int)cellAttribute:(NSCellAttribute)aParameter;
- (BOOL)isContinuous;
- (BOOL)isEditable;
- (BOOL)isBordered;
- (BOOL)isBezeled;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)calcDrawInfo:(NSRect)aRect;
- (void)endEditing:(NSText *)textObj;
- (NSSize)cellSizeForBounds:(NSRect)aRect;
- (void)getPeriodicDelay:(float *)delay interval:(float *)interval;
- (BOOL)hasValidObjectValue;
- (void)highlight:(BOOL)flag withFrame:(NSRect)cellFrame inView:(NSView *)controlVi
- (NSComparisonResult)compare:(id)otherCell;
- (void)setControlTint:(NSControlTint)controlTint;
- (BOOL)continueTracking:(NSPoint)lastPoint at:(NSPoint)currentPoint inView:(NSView
- (NSControlTint)controlTint;
- (NSView *)controlView;
- (void)drawInteriorWithFrame:(NSRect)cellFrame inView:(NSView *)controlView;
- (void)drawWithFrame:(NSRect)cellFrame inView:(NSView *)controlView;
- (NSRect)drawingRectForBounds:(NSRect)theRect;
- (void)editWithFrame:(NSRect)aRect inView:(NSView *)controlView editor:(NSText *)te
    delegate:(id)anObject event:(NSEvent *)theEvent;
- (BOOL)isEntryAcceptable:(NSString *)aString;
- (BOOL)isHighlighted;
- (BOOL)isOpaque;
- (BOOL)isScrollable;
- (BOOL)isSelectable;
- (NSString *)keyEquivalent;
- (NSMenu *)menuForEvent:(NSEvent *)event inRect:(NSRect)cellFrame ofView:(NSView *
- (int)mouseDownFlags;
- (void)resetCursorRect:(NSRect)cellFrame inView:(NSView *)controlView;
- (void)selectWithFrame:(NSRect)aRect inView:(NSView *)controlView editor:(NSText *
    delegate:(id)anObject start:(int)selStart length:(int)selLength;
- (int)sendActionOn:(int)mask;
- (BOOL)startTrackingAt:(NSPoint)startPoint inView:(NSView *)controlView;
- (void)stopTracking:(NSPoint)lastPoint at:(NSPoint)stopPoint inView:(NSView *)conti
- (void)takeDoubleValueFrom:(id)sender;
- (void)takeFloatValueFrom:(id)sender;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)takeIntValueFrom:(id)sender;
- (void)takeObjectValueFrom:(id)sender;
- (void)takeStringValueFrom:(id)sender;
- (NSRect)titleRectForBounds:(NSRect)theRect;
- (BOOL)trackMouse:(NSEvent *)theEvent inRect:(NSRect)cellFrame ofView:(NSView *)co
    untilMouseUp:(BOOL)flag;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

## Subclasses

NSActionCell , NSBrowserCell , NSImageCell , NSTextAttachmentCel l

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSClipView — Mac OS X 10.0

This NSView subclass is used in conjunction with NSScrollView to contain the document view of the scroll view (the document view is the view that contains the content of the document, such as text or graphics). The primary responsibility of NSClipView is to implement the scrolling machinery used by NSScrollView. Ordinarily, you should not need to interact with NSClipView unless you are implementing a class that provides functionality similar to NSScrollView.

```
@interface NSClipView : NSView
 // Accessor Methods
   - (void)setCopiesOnScroll:(BOOL)flag;
   - (BOOL)copiesOnScroll;
   - (void)setBackgroundColor:(NSColor *)color;
   - (NSColor *)backgroundColor;
   - (void)setDrawsBackground:(BOOL)flag;
   - (BOOL)drawsBackground;
   - (void)setDocumentCursor:(NSCursor *)anObj;
   - (NSCursor *)documentCursor;
   - (void)setDocumentView:(NSView *)aView;
   - (id)documentView;
 // Instance Methods
   - (BOOL)autoscroll:(NSEvent *)theEvent;
   - (NSPoint)constrainScrollPoint:(NSPoint)newOrigin;
   - (NSRect)documentRect;
   - (NSRect)documentVisibleRect;
   - (void)scrollToPoint:(NSPoint)newOrigin;
   - (void)viewBoundsChanged:(NSNotification *)notification;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)viewFrameChanged:(NSNotification *)notification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSColor* *Mac OS X 10.0*

This class represents a color in the Application Kit. Each color has acolorspace associated with it, and the are recognized by that color space. NSColor supports six color spaces identified by the following constan

- NSDeviceCMYKColorSpace
- NSDeviceWhiteColorSpace
- NSDeviceRGBColor
- NSCalibratedWhiteColorSpace
- NSCalibratedRGBColorSpace
- NSNamedColorSpace

Calibrated colorspaces use Apple's ColorSync technology to ensure that colors look the same on all outp colorspaces, on the other hand, do not employ ColorSync calibration, and the appearance of colors is th

The set method is one of the most commonly used methods of NSColor , as it sets the color that all sub operations should use. NSColor declares a number of methods for determining the values of various colo colors between colorspaces, creating NSColor objects by changing components of an existing color objec there are a number of convenience contructors such as blueColor , redColor , and blackColor that ret without having to specify component values.

```
@interface NSColor : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (NSColor *)colorForControlTint:(NSControlTint)controlTint;
   + (NSColor *)colorFromPasteboard:(NSPasteboard *)pasteBoard;
   + (NSColor *)colorWithCalibratedHue:(float)hue saturation:(float)saturation brightne
        alpha:(float)alpha;
   + (NSColor *)colorWithCalibratedRed:(float)red green:(float)green blue:(float)blue a
   + (NSColor *)colorWithCalibratedWhite:(float)white alpha:(float)alpha;
   + (NSColor *)colorWithCatalogName:(NSString *)listName colorName:(NSString *)colorN
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSColor *)colorWithDeviceCyan:(float)cyan magenta:(float)magenta yellow:(float)y
    black:(float)black alpha:(float)alpha;
+ (NSColor *)colorWithDeviceHue:(float)hue saturation:(float)saturation brightness:(
    alpha:(float)alpha;
+ (NSColor *)colorWithDeviceRed:(float)red green:(float)green blue:(float)blue alpha
+ (NSColor *)colorWithDeviceWhite:(float)white alpha:(float)alpha;
+ (NSColor*)colorWithPatternImage:(NSImage*)image;
// Class Methods
+ (NSColor *)alternateSelectedControlColor;
+ (NSColor *)alternateSelectedControlTextColor;
+ (NSColor *)blackColor;
+ (NSColor *)blueColor;
+ (NSColor *)brownColor;
+ (NSColor *)clearColor;
+ (NSColor *)controlBackgroundColor;
+ (NSColor *)controlColor;
+ (NSColor *)controlDarkShadowColor;
+ (NSColor *)controlHighlightColor;
+ (NSColor *)controlLightHighlightColor;
+ (NSColor *)controlShadowColor;
+ (NSColor *)controlTextColor;
+ (NSColor *)cyanColor;
+ (NSColor *)darkGrayColor;
+ (NSColor *)disabledControlTextColor;
+ (NSColor *)grayColor;
+ (NSColor *)greenColor;
+ (NSColor *)gridColor;
+ (NSColor *)headerColor;
+ (NSColor *)headerTextColor;
+ (NSColor *)highlightColor;
+ (BOOL)ignoresAlpha;
+ (NSColor *)keyboardFocusIndicatorColor;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSColor *)knobColor;
+ (NSColor *)lightGrayColor;
+ (NSColor *)magentaColor;
+ (NSColor *)orangeColor;
+ (NSColor *)purpleColor;
+ (NSColor *)redColor;
+ (NSColor *)scrollBarColor;
+ (NSColor *)secondarySelectedControlColor;
+ (NSColor *)selectedControlColor;
+ (NSColor *)selectedControlTextColor;
+ (NSColor *)selectedKnobColor;
+ (NSColor *)selectedMenuItemColor;
+ (NSColor *)selectedMenuItemTextColor;
+ (NSColor *)selectedTextBackgroundColor;
+ (NSColor *)selectedTextColor;
+ (void)setIgnoresAlpha:(BOOL)flag;
+ (NSColor *)shadowColor;
+ (NSColor *)textBackgroundColor;
+ (NSColor *)textColor;
+ (NSColor *)whiteColor;
+ (NSColor *)windowBackgroundColor;
+ (NSColor *)windowFrameColor;
+ (NSColor *)windowFrameTextColor;
+ (NSColor *)yellowColor;
// Instance Methods
- (NSColor *)blendedColorWithFraction:(float)fraction ofColor:(NSColor *)color;
- (float)blueComponent;
- (void)set;
- (float)alphaComponent;
- (float)blackComponent;
- (float)brightnessComponent;
- (NSString *)catalogNameComponent;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSString *)colorNameComponent;
- (NSString *)colorSpaceName;
- (NSColor *)colorUsingColorSpaceName:(NSString *)colorSpace;
- (NSColor *)colorUsingColorSpaceName:(NSString *)colorSpace device:(NSDictionary *)
- (NSColor *)colorWithAlphaComponent:(float)alpha;
- (float)cyanComponent;
- (void)drawSwatchInRect:(NSRect)rect;
- (void)getCyan:(float *)cyan magenta:(float *)magenta yellow:(float *)yellow black:
    alpha:(float *)alpha; brightness:(float *)brightness alpha:(float *)alpha;
- (void)getHue:(float *)hue saturation:(float *)saturation
- (void)getRed:(float *)red green:(float *)green blue:(float *)blue alpha:(float *)a
- (void)getWhite:(float *)white alpha:(float *)alpha;
- (float)greenComponent;
- (NSColor *)highlightWithLevel:(float)val;
- (float)hueComponent;
- (NSString *)localizedCatalogNameComponent;
- (NSString *)localizedColorNameComponent;
- (float)magentaComponent;
- (NSImage*)patternImage;
- (float)redComponent;
- (float)saturationComponent;
- (NSColor *)shadowWithLevel:(float)val;
- (float)whiteComponent;
- (void)writeToPasteboard:(NSPasteboard *)pasteBoard;
- (float)yellowComponent;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSColorList* *Mac OS X 10.0*

This class manages an ordered, named list of `NSColors`. The operating system itself provides several color lists, which are visible in the Color panel of any application. To obtain an array of available color lists, use the class method `availableColorLists`. To manage the colors contained within a color list we have several methods at our disposal. The method `colorWithKey:` will return the color associated with the indicated key. Colors are added to the list using the method `insertColor:key:atIndex:`. To remove a color, use `removeColorWithKey:`. To change which color is associated with a key, use the method `setColor:forKey:`.

An important feature of color list objects is that they can be written to files that are kept in well-known locations in the filesystem, thus making them easily accessed by other applications. To store a color list to file, use the method `writeToFile:`. Passing `nil` to this method causes the color list to be stored in the users private color lists directory with the filename *listname.clr*. To initialize a color list object from a stored color list, use the initializer `initWithName:fromFile:`.

```
@interface NSColorList : NSObject <NSCoding>
 // Initializers
   - (id)initWithName:(NSString *)name fromFile:(NSString *)path;
   - (id)initWithName:(NSString *)name;
 // Accessor Methods
   - (void)setColor:(NSColor *)color forKey:(NSString *)key;
 // Class Methods
   + (NSArray *)availableColorLists;
   + (NSColorList *)colorListNamed:(NSString *)name;
 // Instance Methods
   - (NSString *)name;
   - (void)removeColorWithKey:(NSString *)key;
   - (NSArray *)allKeys;
   - (NSColor *)colorWithKey:(NSString *)key;
   - (void)insertColor:(NSColor *)color key:(NSString *)key atIndex:(unsigned)loc;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isEditable;
- (void)removeFile;
- (BOOL)writeToFile:(NSString *)path;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Notifications
NSColorListDidChangeNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSColorPanel* *Mac OS X 10.0*

This class implements the system-wide color picker used by all applications. To obtain the shared color pa class method `sharedColorPanel` . `NSColorPanel` is a subclass of `NSPanel` , so to display the color panel invoke `NSWindow` 's `orderFront` : method. `NSColorPanel` takes a target and an action that are used to n application of the user changing the color selection in the color panel. To obtain the color, use the meth

The color panel optionally displays a slider to change the alpha value of the selected color. This behavio method `setShowsAlpha` :. To determine if the color panel is set to use alpha, invoke `showsAlpha` . It is a an application to add a color list-which is an instance of `NSColorList` -to the color panel. Color lists are using the methods `attachColorList` : and `detachColorList` :.

The Application Kit provides the class `NSColorWell` as an interface to Cocoa's color-picking system. It is sufficient to use `NSColorWell` as an interface for users to select colors in an application, as it both displa associated with it, and provides a means to open the color panel so the user can choose a new color.

```
@interface NSColorPanel : NSPanel
 // Accessor Methods
   - (void)setAction:(SEL)aSelector;
   - (void)setColor:(NSColor *)color;
   - (NSColor *)color;
   - (void)setAccessoryView:(NSView *)aView;
   - (NSView *)accessoryView;
   - (void)setMode:(int)mode;
   - (int)mode;
   - (void)setTarget:(id)anObject;
   - (void)setContinuous:(BOOL)flag;
   - (void)setShowsAlpha:(BOOL)flag;
   - (BOOL)showsAlpha;
 // Class Methods
   + (BOOL)dragColor:(NSColor *)color withEvent:(NSEvent *)theEvent fromView:(NSView *
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (void)setPickerMask:(int)mask;
+ (void)setPickerMode:(int)mode;
+ (NSColorPanel *)sharedColorPanel;
+ (BOOL)sharedColorPanelExists;
// Instance Methods
- (float)alpha;
- (void)attachColorList:(NSColorList *)colorList;
- (void)detachColorList:(NSColorList *)colorList;
- (BOOL)isContinuous;
// Notifications
NSColorPanelColorDidChangeNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSColorPicker* *Mac OS X 10.0*

This class implements the `NSColorPickingDefault` protocol. This class is used to add custom color picke to the `NSColorPanel` , which allows applications to add new interfaces that users can use to choose colo

```
@interface NSColorPicker : NSObject <NSColorPickingDefault>
// Initializers
  - (id)initWithPickerMask:(int)mask colorPanel:(NSColorPanel *)owningColorPanel;
// Accessor Methods
  - (void)setMode:(int)mode;
// Instance Methods
  - (void)attachColorList:(NSColorList *)colorList;
  - (NSColorPanel *)colorPanel;
  - (void)detachColorList:(NSColorList *)colorList;
  - (void)insertNewButtonImage:(NSImage *)newButtonImage in:(NSButtonCell *)buttonCel
  - (NSImage *)provideNewButtonImage;
  - (void)viewSizeChanged:(id)sender;
// Methods Implementing NSColorPickingDefault
  - (id)initWithPickerMask:(int)mask colorPanel:(NSColorPanel *)owningColorPanel;
  - (NSImage *)provideNewButtonImage;
  - (void)insertNewButtonImage:(NSImage *)newButtonImage in:(NSButtonCell *)buttonCel
  - (void)viewSizeChanged:(id)sender;
  - (void)alphaControlAddedOrRemoved:(id)sender;
  - (void)attachColorList:(NSColorList *)colorList;
  - (void)detachColorList:(NSColorList *)colorList;
  - (void)setMode:(int)mode;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSColorWell* *Mac OS X 10.0*

This `NSControl` subclass provides a user interface element that the user can use to open the color picker and select colors the application can use. This `NSControl` subclass has no associated `NSCell` subclass, so `NSColorWell` controls may not appear in `NSMatrix` objects, which require `NSCell` objects as its children. To obtain an `NSColor` object from the color well, use the method `color`; to set the color displayed in the well, invoke `setColor:`.

```
@interface NSColorWell : NSControl
 // Accessor Methods
   - (void)setBordered:(BOOL)flag;
   - (void)setColor:(NSColor *)color;
   - (NSColor *)color;
 // Instance Methods
   - (void)activate:(BOOL)exclusive;
   - (void)deactivate;
   - (void)drawWellInside:(NSRect)insideRect;
   - (BOOL)isActive;
   - (BOOL)isBordered;
   - (void)takeColorFrom:(id)sender;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSComboBox

Mac OS X 10.0

This class provides a combo box interface control to let the user enter a value into the text-field portion of the combo box, or select a value from a pop-up list.

```
@interface NSComboBox : NSTextField
 // Initializers
   - (id)initWithCoder:(NSCoder *)coder;
 // Accessor Methods
   - (void)setNumberOfVisibleItems:(int)visibleItems;
   - (int)numberOfVisibleItems;
   - (void)setHasVerticalScroller:(BOOL)flag;
   - (BOOL)hasVerticalScroller;
   - (void)setCompletes:(BOOL)completes;
   - (BOOL)completes;
   - (void)setIntercellSpacing:(NSSize)aSize;
   - (NSSize)intercellSpacing;
   - (void)setItemHeight:(float)itemHeight;
   - (float)itemHeight;
   - (void)setUsesDataSource:(BOOL)flag;
   - (BOOL)usesDataSource;
   - (void)setDataSource:(id)aSource;
   - (id)dataSource;
 // Instance Methods
   - (void)deselectItemAtIndex:(int)index;
   - (void)encodeWithCoder:(NSCoder *)coder;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (int)indexOfItemWithObjectValue:(id)object;
- (void)addItemWithObjectValue:(id)object;
- (void)addItemsWithObjectValues:(NSArray *)objects;
- (int)indexOfSelectedItem;
- (void)insertItemWithObjectValue:(id)object atIndex:(int)index;
- (id)itemObjectValueAtIndex:(int)index;
- (void)noteNumberOfItemsChanged;
- (int)numberOfItems;
- (id)objectValueOfSelectedItem;
- (NSArray *)objectValues;
- (void)reloadData;
- (void)removeAllItems;
- (void)removeItemAtIndex:(int)index;
- (void)removeItemWithObjectValue:(id)object;
- (void)scrollItemAtIndexToTop:(int)index;
- (void)scrollItemAtIndexToVisible:(int)index;
- (void)selectItemAtIndex:(int)index;
- (void)selectItemWithObjectValue:(id)object;
// Methods Implemented by the Delegate
- (void)comboBoxSelectionDidChange:(NSNotification *)notification;
- (void)comboBoxSelectionIsChanging:(NSNotification *)notification;
- (void)comboBoxWillDismiss:(NSNotification *)notification;
- (void)comboBoxWillPopUp:(NSNotification *)notification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSComboBoxCell — Mac OS X 10.0

This class is the subclass of `NSCell` that provides the look and feel of the `NSComboBox` control.

```
@interface NSComboBoxCell : NSTextFieldCell
 // Initializers
   - (id)initWithCoder:(NSCoder *)coder;
 // Accessor Methods
   - (void)setNumberOfVisibleItems:(int)visibleItems;
   - (int)numberOfVisibleItems;
   - (void)setHasVerticalScroller:(BOOL)flag;
   - (BOOL)hasVerticalScroller;
   - (void)setIntercellSpacing:(NSSize)aSize;
   - (NSSize)intercellSpacing;
   - (void)setItemHeight:(float)itemHeight;
   - (float)itemHeight;
   - (void)setDataSource:(id)aSource;
   - (id)dataSource;
   - (void)setUsesDataSource:(BOOL)flag;
   - (BOOL)usesDataSource;
   - (void)setCompletes:(BOOL)completes;
   - (BOOL)completes;
 // Instance Methods
   - (void)addItemsWithObjectValues:(NSArray *)objects;
   - (void)addItemWithObjectValue:(id)object;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (NSString *)**completedString**:(NSString *)*string*; |
| - (void)**deselectItemAtIndex**:(int)*index*; |
| - (void)**encodeWithCoder**:(NSCoder *)*coder*; |
| - (int)**indexOfItemWithObjectValue**:(id)*object*; |
| - (int)**indexOfSelectedItem**; |
| - (void)**insertItemWithObjectValue**:(id)*object* **atIndex**:(int)*index*; |
| - (id)**itemObjectValueAtIndex**:(int)*index*; |
| - (void)**noteNumberOfItemsChanged**; |
| - (int)**numberOfItems**; |
| - (id)**objectValueOfSelectedItem**; |
| - (NSArray *)**objectValues**; |
| - (void)**reloadData**; |
| - (void)**removeAllItems**; |
| - (void)**removeItemAtIndex**:(int)*index*; |
| - (void)**removeItemWithObjectValue**:(id)*object*; |
| - (void)**scrollItemAtIndexToTop**:(int)*index*; |
| - (void)**scrollItemAtIndexToVisible**:(int)*index*; |
| - (void)**selectItemAtIndex**:(int)*index*; |
| - (void)**selectItemWithObjectValue**:(id)*object*; |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# NSControl

Mac OS X 10.0

NSControl is a subclass of NSView that is the base class of all AppKit controls like text fields (NSTextFie views (NSTableView ), color wells (NSColorWell ), and more. Controls generally have associated cells th graphical appearance of the control, and responding appropriately to user interaction with the control.

```
@interface NSControl : NSView
 // Initializers
   - (id)initWithFrame:(NSRect)frameRect;
 // Accessor Methods
   - (void)setTag:(int)anInt;
   - (int)tag;
   - (void)setCell:(NSCell *)aCell;
   - (id)cell;
   - (void)setNeedsDisplay;
   - (void)setTarget:(id)anObject;
   - (id)target;
   - (void)setAction:(SEL)aSelector;
   - (SEL)action;
   - (void)setFormatter:(NSFormatter *)newFormatter;
   - (id)formatter;
   - (void)setIgnoresMultiClick:(BOOL)flag;
   - (BOOL)ignoresMultiClick;
   - (void)setIntValue:(int)anInt;
   - (int)intValue;
   - (void)setStringValue:(NSString *)aString;
   - (NSString *)stringValue;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setFloatValue:(float)aFloat;
- (float)floatValue;
- (void)setAttributedStringValue:(NSAttributedString *)obj;
- (NSAttributedString *)attributedStringValue;
- (void)setDoubleValue:(double)aDouble;
- (double)doubleValue;
- (void)setEnabled:(BOOL)flag;
- (void)setFloatingPointFormat:(BOOL)autoRange left:(unsigned)leftDigits right:(unsi
- (void)setAlignment:(NSTextAlignment)mode;
- (NSTextAlignment)alignment;
- (void)setObjectValue:(id)obj;
- (id)objectValue;
- (void)setContinuous:(BOOL)flag;
- (void)setFont:(NSFont *)fontObj;
- (NSFont *)font;
// Class Methods
+ (Class)cellClass;
+ (void)setCellClass:(Class)factoryId;
// Instance Methods
- (void)calcSize;
- (NSText *)currentEditor;
- (BOOL)abortEditing;
- (BOOL)isContinuous;
- (BOOL)isEnabled;
- (void)mouseDown:(NSEvent *)theEvent;
- (void)selectCell:(NSCell *)aCell;
- (id)selectedCell;
- (int)selectedTag;
- (BOOL)sendAction:(SEL)theAction to:(id)theTarget;
- (int)sendActionOn:(int)mask;
- (void)sizeToFit;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)takeDoubleValueFrom:(id)sender;
- (void)takeFloatValueFrom:(id)sender;
- (void)takeIntValueFrom:(id)sender;
- (void)takeObjectValueFrom:(id)sender;
- (void)takeStringValueFrom:(id)sender;
- (void)updateCell:(NSCell *)aCell;
- (void)updateCellInside:(NSCell *)aCell;
- (void)validateEditing;
- (void)drawCell:(NSCell *)aCell;
- (void)drawCellInside:(NSCell *)aCell;
// Methods Implemented by the Delegate
- (BOOL)control:(NSControl *)control didFailToFormatString:(NSString *)string error
- (void)control:(NSControl *)control didFailToValidatePartialString:(NSString *)str
    errorDescription:(NSString *)error;
- (BOOL)control:(NSControl *)control  isValidObject:(id)obj;
- (BOOL)control:(NSControl *)control textShouldBeginEditing:(NSText *)fieldEditor;
- (BOOL)control:(NSControl *)control textShouldEndEditing:(NSText *)fieldEditor;
- (BOOL)control:(NSControl *)control textView:(NSTextView *)textView doCommandBySel
- (void)controlTextDidBeginEditing:(NSNotification *)obj;
- (void)controlTextDidChange:(NSNotification *)obj;
- (void)controlTextDidEndEditing:(NSNotification *)obj;
```

## Subclasses

NSBrowser , NSButton , NSColorWell , NSImageView , NSMatrix , NSScroller , NSSlider , NSStepper

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSCursor — Mac OS X 10.0

This class represents a mouse cursor on the screen, and is used to create new cursors that can be used in place of the default arrow cursor. `NSView` objects often define regions within the view in which the cursor is changed when the mouse is present in those regions. For example, in a text view the cursor changes to an I-beam when the cursor is inside of the text field.

```
@interface NSCursor : NSObject <NSCoding>
// Initializers
  - (id)initWithImage:(NSImage *)newImage foregroundColorHint:(NSColor *)fg
      backgroundColorHint:(NSColor *)bg hotSpot:(NSPoint)hotSpot;
  - (id)initWithImage:(NSImage *)newImage hotSpot:(NSPoint)aPoint;
// Accessor Methods
  - (void)setOnMouseEntered:(BOOL)flag;
  - (void)setOnMouseExited:(BOOL)flag;
// Class Methods
  + (NSCursor *)IBeamCursor;
  + (NSCursor *)arrowCursor;
  + (NSCursor *)currentCursor;
  + (void)hide;
  + (void)pop;
  + (void)setHiddenUntilMouseMoves:(BOOL)flag;
  + (void)unhide;
// Instance Methods
  - (void)set;
  - (NSPoint)hotSpot;
  - (NSImage *)image;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isSetOnMouseEntered;
- (BOOL)isSetOnMouseExited;
- (void)mouseEntered:(NSEvent *)theEvent;
- (void)mouseExited:(NSEvent *)theEvent;
- (void)pop;
- (void)push;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSCustomImageRep* *Mac OS X 10.0*

This subclass of `NSImageRep` allows you to create images from custom drawing code. For example, one might implement a subclass of `NSCustomImageRep` to draw a complicated Bezier path as the image represented by the particular object. This permits shapes to be drawn in contexts that use images instead of views.

```
@interface NSCustomImageRep : NSImageRep
 // Initializers
   - (id)initWithDrawSelector:(SEL)aMethod delegate:(id)anObject;
 // Instance Methods
   - (id)delegate;
   - (SEL)drawSelector;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# NSDocument

Mac OS X 10.0

This class is one of three that comprise Cocoa's document-based application architecture; the other two NSWindowController . NSDocument is an abstract class that defines the fundamental interface for object interface includes methods for loading and saving a document's contents, managing a document's windo managing an undo manager. NSDocument is never used directly; rather, developers subclass NSDocument to tailor the document to their needs.

```
@interface NSDocument : NSObject
 // Initializers
   - (id)init;
   - (id)initWithContentsOfFile:(NSString *)fileName ofType:(NSString *)fileType;
   - (id)initWithContentsOfURL:(NSURL *)url ofType:(NSString *)fileType;
 // Accessor Methods
   - (void)setHasUndoManager:(BOOL)flag;
   - (BOOL)hasUndoManager;
   - (void)setFileType:(NSString *)type;
   - (NSString *)fileType;
   - (void)setFileName:(NSString *)fileName;
   - (NSString *)fileName;
   - (void)setUndoManager:(NSUndoManager *)undoManager;
   - (NSUndoManager *)undoManager;
   - (void)setPrintInfo:(NSPrintInfo *)printInfo;
   - (NSPrintInfo *)printInfo;
   - (void)setWindow:(NSWindow *)window;
 // Class Methods
   + (BOOL)isNativeType:(NSString *)type;
   + (NSArray *)readableTypes;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSArray *)writableTypes;
// Instance Methods
- (NSData *)dataRepresentationOfType:(NSString *)type;
- (NSString *)displayName;
- (void)addWindowController:(NSWindowController *)windowController;
- (BOOL)canCloseDocument;
- (NSDictionary *)fileAttributesToWriteToFile:(NSString *)fullDocumentPath ofType:(
    saveOperation:(NSSaveOperationType)saveOperationType;
- (void)canCloseDocumentWithDelegate:(id)delegate shouldCloseSelector:(SEL)shouldCl
    contextInfo:(void *)contextInfo;
- (void)close;
- (BOOL)fileNameExtensionWasHiddenInLastRunSavePanel;
- (NSString *)fileNameFromRunningSavePanelForSaveOperation:(NSSaveOperationType)save
- (NSString *)fileTypeFromLastRunSavePanel;
- (NSFileWrapper *)fileWrapperRepresentationOfType:(NSString *)type;
- (BOOL)isDocumentEdited;
- (BOOL)keepBackupFile;
- (BOOL)loadDataRepresentation:(NSData *)data ofType:(NSString *)type;
- (BOOL)loadFileWrapperRepresentation:(NSFileWrapper *)wrapper ofType:(NSString *)ty
- (void)makeWindowControllers;
- (BOOL)preparePageLayout:(NSPageLayout *)pageLayout;
- (BOOL)prepareSavePanel:(NSSavePanel *)savePanel;
- (IBAction)printDocument:(id)sender;
- (void)printShowingPrintPanel:(BOOL)flag;
- (BOOL)readFromFile:(NSString *)fileName ofType:(NSString *)type;
- (BOOL)readFromURL:(NSURL *)url ofType:(NSString *)type;
- (void)removeWindowController:(NSWindowController *)windowController;
- (IBAction)revertDocumentToSaved:(id)sender;
- (BOOL)revertToSavedFromFile:(NSString *)fileName ofType:(NSString *)type;
- (BOOL)revertToSavedFromURL:(NSURL *)url ofType:(NSString *)type;
- (int)runModalPageLayoutWithPrintInfo:(NSPrintInfo *)printInfo;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)runModalPageLayoutWithPrintInfo:(NSPrintInfo *)printInfo
    delegate:(id)delegate didRunSelector:(SEL)didRunSelector contextInfo:(void *)c
- (void)runModalPrintOperation:(NSPrintOperation *)printOperation
    delegate:(id)delegate didRunSelector:(SEL)didRunSelector contextInfo:(void *)c
- (int)runModalSavePanel:(NSSavePanel *)savePanel withAccessoryView:(NSView *)access
- (void)runModalSavePanelForSaveOperation:(NSSaveOperationType)saveOperation
    delegate:(id)delegate didSaveSelector:(SEL)didSaveSelector contextInfo:(void *
- (IBAction)runPageLayout:(id)sender;
- (IBAction)saveDocument:(id)sender;
- (IBAction)saveDocumentAs:(id)sender;
- (IBAction)saveDocumentTo:(id)sender;
- (void)saveDocumentWithDelegate:(id)delegate didSaveSelector:(SEL)didSaveSelector
    contextInfo:(void *)contextInfo;
- (void)saveToFile:(NSString *)fileName saveOperation:(NSSaveOperationType)saveOpera
    delegate:(id)delegate didSaveSelector:(SEL)didSaveSelector contextInfo:(void *
- (BOOL)shouldChangePrintInfo:(NSPrintInfo *)newPrintInfo;
- (BOOL)shouldCloseWindowController:(NSWindowController *)windowController;
- (void)shouldCloseWindowController:(NSWindowController *)windowController
    delegate:(id)delegate shouldCloseSelector:(SEL)callback  contextInfo:(void *)c
- (BOOL)shouldRunSavePanelWithAccessoryView;
- (void)showWindows;
- (void)updateChangeCount:(NSDocumentChangeType)change;
- (BOOL)validateMenuItem:(NSMenuItem *)anItem;
- (BOOL)validateUserInterfaceItem:(id <NSValidatedUserInterfaceItem>)anItem;
- (void)windowControllerDidLoadNib:(NSWindowController *)windowController;
- (void)windowControllerWillLoadNib:(NSWindowController *)windowController;
- (NSArray *)windowControllers;
- (NSString *)windowNibName;
- (BOOL)writeToFile:(NSString *)fileName ofType:(NSString *)type;
- (BOOL)writeToFile:(NSString *)fullDocumentPath ofType:(NSString *)documentTypeName
    originalFile:(NSString *)fullOriginalDocumentPath saveOperation:(NSSaveOperatio
- (BOOL)writeToURL:(NSURL *)url ofType:(NSString *)type;
- (BOOL)writeWithBackupToFile:(NSString *)fullDocumentPath ofType:(NSString *)docume
    saveOperation:(NSSaveOperationType)saveOperationType;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# NSDocumentController — Mac OS X 10.0

NSDocumentController is one of three classes that make up the document-based application architectu NSDocument and NSWindowController . This class is responsible for managing an applications document implementation for the File → Open and File New commands. Additionally, NSDocumentController documents are properly saved and closed before an application terminates.

```
@interface NSDocumentController : NSObject <NSCoding>
// Initializers
  - (id)init;
// Accessor Methods
  - (void)setShouldCreateUI:(BOOL)flag;
  - (BOOL)shouldCreateUI;
// Class Methods
  + (id)sharedDocumentController;
// Instance Methods
  - (BOOL)closeAllDocuments;
  - (NSArray *)URLsFromRunningOpenPanel;
  - (void)addDocument:(NSDocument *)document;
  - (IBAction)clearRecentDocuments:(id)sender;
  - (void)closeAllDocumentsWithDelegate:(id)delegate didCloseAllSelector:(SEL)didAllC
      contextInfo:(void *)contextInfo;
  - (NSString *)currentDirectory;
  - (id)currentDocument;
  - (NSString *)displayNameForType:(NSString *)documentTypeName;
  - (Class)documentClassForType:(NSString *)documentTypeName;
  - (id)documentForFileName:(NSString *)fileName;
  - (id)documentForWindow:(NSWindow *)window;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSArray *)documents;
- (NSArray *)fileExtensionsFromType:(NSString *)documentTypeName;
- (NSArray *)fileNamesFromRunningOpenPanel;
- (BOOL)hasEditedDocuments;
- (id)makeDocumentWithContentsOfFile:(NSString *)fileName ofType:(NSString *)type;
- (id)makeDocumentWithContentsOfURL:(NSURL *)url ofType:(NSString *)type;
- (id)makeUntitledDocumentOfType:(NSString *)type;
- (IBAction)newDocument:(id)sender;
- (void)noteNewRecentDocument:(NSDocument *)document;
- (void)noteNewRecentDocumentURL:(NSURL *)url;
- (IBAction)openDocument:(id)sender;
- (id)openDocumentWithContentsOfFile:(NSString *)fileName display:(BOOL)display;
- (id)openDocumentWithContentsOfURL:(NSURL *)url display:(BOOL)display;
- (id)openUntitledDocumentOfType:(NSString*)type display:(BOOL)display;
- (NSArray *)recentDocumentURLs;
- (void)removeDocument:(NSDocument *)document;
- (BOOL)reviewUnsavedDocumentsWithAlertTitle:(NSString *)title cancellable:(BOOL)ca
- (void)reviewUnsavedDocumentsWithAlertTitle:(NSString *)title cancellable:(BOOL)ca
    didReviewAllSelector:(SEL)didReviewAllSelector contextInfo:(void *)contextInfo
- (int)runModalOpenPanel:(NSOpenPanel *)openPanel  forTypes:(NSArray *)openableFile
- (IBAction)saveAllDocuments:(id)sender;
- (NSString *)typeFromFileExtension:(NSString *)fileNameExtensionOrHFSFileType;
- (BOOL)validateMenuItem:(NSMenuItem *)anItem;
- (BOOL)validateUserInterfaceItem:(id <NSValidatedUserInterfaceItem>)anItem;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSDrawer* *Mac OS X 10.0*

This class implements the drawer interface component. Drawers are extensions to windows that contain a content view, and can be opened and closed along one edge of a window to show and hide the contents contained within. One example of an `NSDrawer` is the Mailboxes drawer in *Mail.app* .

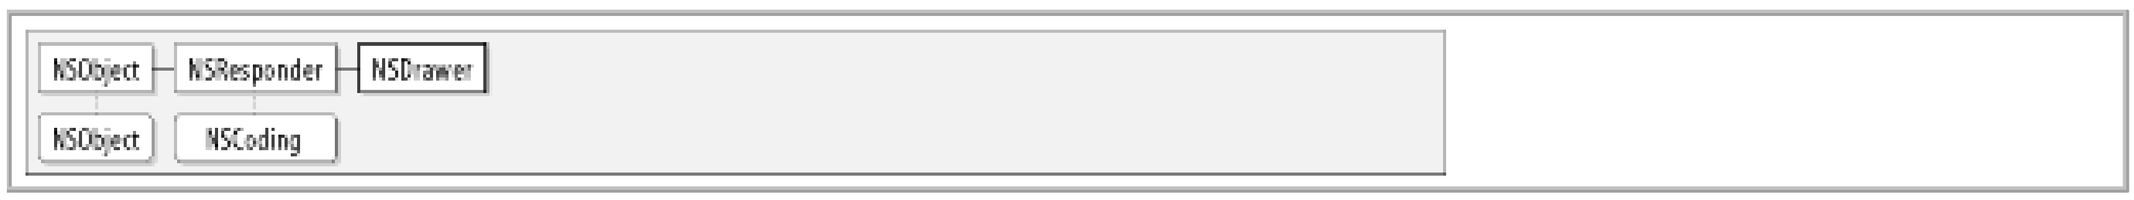


```
@interface NSDrawer : NSResponder
 // Initializers
   - (id)initWithContentSize:(NSSize)contentSize preferredEdge:(NSRectEdge)edge;
 // Accessor Methods
   - (void)setPreferredEdge:(NSRectEdge)edge;
   - (NSRectEdge)preferredEdge;
   - (void)setParentWindow:(NSWindow *)parent;
   - (NSWindow *)parentWindow;
   - (void)setTrailingOffset:(float)offset;
   - (float)trailingOffset;
   - (void)setMinContentSize:(NSSize)size;
   - (NSSize)minContentSize;
   - (void)setLeadingOffset:(float)offset;
   - (float)leadingOffset;
   - (void)setMaxContentSize:(NSSize)size;
   - (NSSize)maxContentSize;
   - (void)setDelegate:(id)anObject;
   - (id)delegate;
   - (void)setContentSize:(NSSize)size;
   - (NSSize)contentSize;
   - (void)setContentView:(NSView *)aView;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSView *)contentView;
// Instance Methods
- (void)close;
- (void)close:(id)sender;
- (NSRectEdge)edge;
- (void)open;
- (void)open:(id)sender;
- (void)openOnEdge:(NSRectEdge)edge;
- (int)state;
- (void)toggle:(id)sender;
// Methods Implemented by the Delegate
- (void)drawerDidClose:(NSNotification *)notification;
- (void)drawerDidOpen:(NSNotification *)notification;
- (BOOL)drawerShouldClose:(NSDrawer *)sender;
- (BOOL)drawerShouldOpen:(NSDrawer *)sender;
- (void)drawerWillClose:(NSNotification *)notification;
- (void)drawerWillOpen:(NSNotification *)notification;
- (NSSize)drawerWillResizeContents:(NSDrawer *)sender toSize:(NSSize)contentSize;
// Notifications
NSDrawerDidCloseNotification;
NSDrawerDidOpenNotification;
NSDrawerWillCloseNotification;
NSDrawerWillOpenNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSEPSImageRep* *Mac OS X 10.0*

This subclass of `NSImageRep` is capable of rendering an image from Encapsulated PostScript (EPS) data.

```
@interface NSEPSImageRep : NSImageRep
 // Initializers
   - (id)initWithData:(NSData *)epsData;
 // Class Methods
   + (id)imageRepWithData:(NSData *)epsData;
 // Instance Methods
   - (NSData *)EPSRepresentation;
   - (NSRect)boundingBox;
   - (void)prepareGState;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# *NSEvent* *Mac OS X 10.0*

This class encapsulates the data related to all events in a Cocoa application. `NSEvent` objects are dispatcl appropriate receiver using the method `sendEvent:`. Both key and mouse events are represented by `NSE` to events must inherit from `NSResponder`.

```
@interface NSEvent : NSObject <NSCoding, NSCopying>
```

```
// Class Methods
```

```
+ (NSEvent *)enterExitEventWithType:(NSEventType)type location:(NSPoint)location mod
    timestamp:(NSTimeInterval)time windowNumber:(int)wNum
    context:(NSGraphicsContext*)context eventNumber:(int)eNum trackingNumber:(int)
```

```
+ (NSEvent *)keyEventWithType:(NSEventType)type location:(NSPoint)location modifierF
    timestamp:(NSTimeInterval)time windowNumber:(int)wNum context:(NSGraphicsConte
    characters:(NSString *)keys charactersIgnoringModifiers:(NSString *)ukeys
```

```
+ (NSEvent *)mouseEventWithType:(NSEventType)type location:(NSPoint)location modifie
    timestamp:(NSTimeInterval)time windowNumber:(int)wNum context:(NSGraphicsConte
    eventNumber:(int)eNum clickCount:(int)cNum pressure:(float)pressure;
```

```
+ (NSPoint)mouseLocation;
```

```
+ (NSEvent *)otherEventWithType:(NSEventType)type location:(NSPoint)location modifie
    timestamp:(NSTimeInterval)time windowNumber:(int)wNum context:(NSGraphicsConte
    subtype:(short)subtype data1:(int)d1 data2:(int)d2;
```

```
+ (void)startPeriodicEventsAfterDelay:(NSTimeInterval)delay withPeriod:(NSTimeInterv
```

```
+ (void)stopPeriodicEvents;
```

```
// Instance Methods
```

```
- (int)buttonNumber;
```

```
- (NSString *)characters;
```

```
- (NSString *)charactersIgnoringModifiers;
```

```
- (int)clickCount;
```

```
- (NSGraphicsContext*)context;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (int)data1;
- (int)data2;
- (float)deltaX;
- (float)deltaY;
- (float)deltaZ;
- (int)eventNumber;
- (BOOL)isARepeat;
- (unsigned short)keyCode;
- (NSPoint)locationInWindow;
- (unsigned int)modifierFlags;
- (float)pressure;
- (short)subtype;
- (NSTimeInterval)timestamp;
- (int)trackingNumber;
- (NSEventType)type;
- (void *)userData;
- (NSWindow *)window;
- (int)windowNumber;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSFileWrapper — Mac OS X 10.0

This class is used to represent a file, or a set of filescontained in a file package, as a single unit of inforn application. NSFileWrapper is often used in conjunction with subclasses of NSDocument as a means of co document's data. This class provides functionality that allows clients to edit file attributes and perform fi clients may assign an icon to represent the file wrapper object in dragging operations.

```
@interface NSFileWrapper : NSObject <NSCoding>
 // Initializers
   - (id)initDirectoryWithFileWrappers:(NSDictionary *)docs;
   - (id)initRegularFileWithContents:(NSData *)data;
   - (id)initSymbolicLinkWithDestination:(NSString *)path;
   - (id)initWithPath:(NSString *)path;
   - (id)initWithSerializedRepresentation:(NSData *)data;
 // Accessor Methods
   - (void)setFilename:(NSString *)filename;
   - (NSString *)filename;
   - (void)setIcon:(NSImage *)icon;
   - (NSImage *)icon;
   - (void)setFileAttributes:(NSDictionary *)attributes;
   - (NSDictionary *)fileAttributes;
   - (void)setPreferredFilename:(NSString *)filename;
   - (NSString *)preferredFilename;
 // Instance Methods
   - (NSString *)addFileWithPath:(NSString *)path;
   - (NSString *)addFileWrapper:(NSFileWrapper *)doc;
   - (NSString *)addRegularFileWithContents:(NSData *)data preferredFilename:(NSString
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSString *)addSymbolicLinkWithDestination:(NSString *)path preferredFilename:(NSS
- (NSDictionary *)fileWrappers;
- (BOOL)isDirectory;
- (BOOL)isRegularFile;
- (BOOL)isSymbolicLink;
- (NSString *)keyForFileWrapper:(NSFileWrapper *)doc;
- (BOOL)needsToBeUpdatedFromPath:(NSString *)path;
- (NSData *)regularFileContents;
- (void)removeFileWrapper:(NSFileWrapper *)doc;
- (NSData *)serializedRepresentation;
- (NSString *)symbolicLinkDestination;
- (BOOL)updateFromPath:(NSString *)path;
- (BOOL)writeToFile:(NSString *)path atomically:(BOOL)atomicFlag updateFilenames:(BO
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# *NSFont* *Mac OS X 10.0*

This class represents a single font in an application. `NSAttributedString` uses `NSFont` as an attribute th should be drawn in. `NSFont` provides access to all of the characteristics of a font, such as the ascender a underline thickness, and more.

```
@interface NSFont : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (NSFont *)fontWithName:(NSString *)fontName matrix:(const float *)fontMatrix;
   + (NSFont *)fontWithName:(NSString *)fontName size:(float)fontSize;
 // Class Methods
   + (float)labelFontSize;
   + (float)smallSystemFontSize;
   + (float)systemFontSize;
   + (NSFont *)boldSystemFontOfSize:(float)fontSize;
   + (NSFont *)controlContentFontOfSize:(float)fontSize;
   + (NSFont *)labelFontOfSize:(float)fontSize;
   + (NSFont *)menuFontOfSize:(float)fontSize;
   + (NSFont *)messageFontOfSize:(float)fontSize;
   + (NSFont *)paletteFontOfSize:(float)fontSize;
   + (NSArray *)preferredFontNames;
   + (void)setPreferredFontNames:(NSArray *)fontNameArray;
   + (void)setUserFixedPitchFont:(NSFont *)aFont;
   + (void)setUserFont:(NSFont *)aFont;
   + (NSFont *)systemFontOfSize:(float)fontSize;
   + (NSFont *)titleBarFontOfSize:(float)fontSize;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSFont *)toolTipsFontOfSize:(float)fontSize;
+ (void)useFont:(NSString *)fontName;
+ (NSFont *)userFixedPitchFontOfSize:(float)fontSize;
+ (NSFont *)userFontOfSize:(float)fontSize;
// Instance Methods
- (void)set;
- (float)ascender;
- (float)capHeight;
- (float)defaultLineHeightForFont;
- (float)descender;
- (NSString *)encodingScheme;
- (NSMultibyteGlyphPacking)glyphPacking;
- (NSGlyph)glyphWithName:(NSString *)aName;
- (BOOL)isFixedPitch;
- (float)italicAngle;
- (NSSize)maximumAdvancement;
- (NSStringEncoding)mostCompatibleStringEncoding;
- (unsigned)numberOfGlyphs;
- (int)positionsForCompositeSequence:(NSGlyph *)someGlyphs numberOfGlyphs:(int)numG
    pointArray:(NSPointArray)points;
- (float)underlinePosition;
- (float)underlineThickness;
- (float)xHeight;
- (NSSize)advancementForGlyph:(NSGlyph)ag;
- (NSDictionary *)afmDictionary;
- (NSRect)boundingRectForFont;
- (NSRect)boundingRectForGlyph:(NSGlyph)aGlyph;
- (NSCharacterSet *)coveredCharacterSet;
- (NSString *)displayName;
- (NSString *)familyName;
- (NSString *)fontName;
- (BOOL)glyphIsEncoded:(NSGlyph)aGlyph;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isBaseFont;
- (const float *)matrix;
- (float)pointSize;
- (NSPoint)positionOfGlyph:(NSGlyph)aGlyph forCharacter:(unichar)aChar struckOverRec
- (NSPoint)positionOfGlyph:(NSGlyph)aGlyph struckOverRect:(NSRect)aRect metricsExis
- (NSPoint)positionOfGlyph:(NSGlyph)curGlyph precededByGlyph:(NSGlyph)prevGlyph isN
- (NSPoint)positionOfGlyph:(NSGlyph)curGlyph  struckOverGlyph:(NSGlyph)prevGlyph me
- (NSPoint)positionOfGlyph:(NSGlyph)thisGlyph withRelation:(NSGlyphRelation)rel toB
    totalAdvancement:(NSSizePointer)adv metricsExist:(BOOL *)exist;
- (NSFont *)printerFont;
- (NSFont *)screenFont;
- (float)widthOfString:(NSString *)string;
// Methods Implementing NSCoding
  - (void)encodeWithCoder:(NSCoder *)aCoder;
  - (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
  - (id)copyWithZone:(NSZone *)zone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSFontManager

Mac OS X 10.0

This class defines the interface to the system Cocoa uses to coordinate the usage of fonts in an application. Part of `NSFontManager` 's duty is to keep track of the currently selected font, and manage the interaction between the Font Panel, Font menu, and text-bearing objects. To obtain an application's Font Manager, use the class method `sharedFontManager` .

```
@interface NSFontManager : NSObject
 // Accessor Methods
   - (void)setEnabled:(BOOL)flag;
   - (void)setSelectedFont:(NSFont *)fontObj isMultiple:(BOOL)flag;
   - (NSFont *)selectedFont;
   - (void)setDelegate:(id)anObject;
   - (id)delegate;
   - (void)setAction:(SEL)aSelector;
   - (SEL)action;
   - (void)setFontMenu:(NSMenu *)newMenu;
 // Class Methods
   + (void)setFontManagerFactory:(Class)factoryId;
   + (void)setFontPanelFactory:(Class)factoryId;
   + (NSFontManager *)sharedFontManager;
 // Instance Methods
   - (NSString *)localizedNameForFamily:(NSString *)family face:(NSString *)faceKey;
   - (void)addFontTrait:(id)sender;
   - (NSArray *)availableFontFamilies;
   - (NSArray *)availableFontNamesWithTraits:(NSFontTraitMask)someTraits;
   - (NSArray *)availableFonts;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSArray *)availableMembersOfFontFamily:(NSString *)fam;
- (NSFont *)convertFont:(NSFont *)fontObj;
- (NSFont *)convertFont:(NSFont *)fontObj toFace:(NSString *)typeface;
- (NSFont *)convertFont:(NSFont *)fontObj toFamily:(NSString *)family;
- (NSFont *)convertFont:(NSFont *)fontObj toHaveTrait:(NSFontTraitMask)trait;
- (NSFont *)convertFont:(NSFont *)fontObj toNotHaveTrait:(NSFontTraitMask)trait;
- (NSFont *)convertFont:(NSFont *)fontObj toSize:(float)size;
- (NSFont *)convertWeight:(BOOL)upFlag ofFont:(NSFont *)fontObj;
- (NSMenu *)fontMenu:(BOOL)create;
- (BOOL)fontNamed:(NSString *)fName hasTraits:(NSFontTraitMask)someTraits;
- (NSFontPanel *)fontPanel:(BOOL)create;
- (NSFont *)fontWithFamily:(NSString *)family traits:(NSFontTraitMask)traits
    weight:(int)weight size:(float)size;
- (BOOL)isEnabled;
- (BOOL)isMultiple;
- (void)modifyFont:(id)sender;
- (void)modifyFontViaPanel:(id)sender;
- (void)orderFrontFontPanel:(id)sender;
- (void)removeFontTrait:(id)sender;
- (BOOL)sendAction;
- (NSFontTraitMask)traitsOfFont:(NSFont *)fontObj;
- (int)weightOfFont:(NSFont *)fontObj;
// Methods Implemented by the Delegate
- (void)changeFont:(id)sender;
- (BOOL)fontManager:(id)sender willIncludeFont:(NSString *)fontName;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSFontPanel — Mac OS X 10.0

This class provides an implementation for the font-panel that users interact with to select fonts in an application. The panel provides a list of all available fonts from which the user can select a font, style size, and preview the font as well. `NSFontPanel` communicates with `NSFontManager` to obtain the set of available fonts, as well as to effect any changes that may need to be done in the selected text.

```
@interface NSFontPanel : NSPanel
 // Accessor Methods
   - (void)setEnabled:(BOOL)flag;
   - (void)setAccessoryView:(NSView *)aView;
   - (NSView *)accessoryView;
   - (void)setPanelFont:(NSFont *)fontObj isMultiple:(BOOL)flag;
 // Class Methods
   + (NSFontPanel *)sharedFontPanel;
   + (BOOL)sharedFontPanelExists;
 // Instance Methods
   - (void)reloadDefaultFontFamilies;
   - (BOOL)isEnabled;
   - (NSFont *)panelConvertFont:(NSFont *)fontObj;
   - (BOOL)worksWhenModal;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSForm

Mac OS X 10.0

This subclass of `NSMatrix` implements an interface component that is a stack of `NSFormCell`s, which are a type of cell that represents a titled text entry field.

```
@interface NSForm : NSMatrix
 // Accessor Methods
   - (void)setTitleAlignment:(NSTextAlignment)mode;
   - (void)setEntryWidth:(float)width;
   - (void)setInterlineSpacing:(float)spacing;
   - (void)setBordered:(BOOL)flag;
   - (void)setBezeled:(BOOL)flag;
   - (void)setTitleFont:(NSFont *)fontObj;
   - (void)setTextFont:(NSFont *)fontObj;
   - (void)setTextAlignment:(int)mode;
 // Instance Methods
   - (NSFormCell *)addEntry:(NSString *)title;
   - (NSFormCell *)insertEntry:(NSString *)title atIndex:(int)index;
   - (id)cellAtIndex:(int)index;
   - (int)indexOfCellWithTag:(int)aTag;
   - (int)indexOfSelectedItem;
   - (void)removeEntryAtIndex:(int)index;
   - (void)selectTextAtIndex:(int)index;
   - (void)drawCellAtIndex:(int)index;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSFormCell — Mac OS X 10.0

This class is a subclass of `NSActionCell` that represents a labeled text entry field. The left of the cell consists of a title, while the right of the cell is an editable text entry field. `NSFormCell`s are used to implement `NSForm` controls.

```
@interface NSFormCell : NSActionCell
 // Initializers
   - (id)initTextCell:(NSString *)aString;
 // Accessor Methods
   - (void)setAttributedTitle:(NSAttributedString *)obj;
   - (NSAttributedString *)attributedTitle;
   - (void)setTitleWidth:(float)width;
   - (float)titleWidth;
   - (void)setTitleAlignment:(NSTextAlignment)mode;
   - (NSTextAlignment)titleAlignment;
   - (void)setTitleFont:(NSFont *)fontObj;
   - (NSFont *)titleFont;
   - (void)setTitle:(NSString *)aString;
   - (NSString *)title;
 // Instance Methods
   - (BOOL)isOpaque;
   - (float)titleWidth:(NSSize)aSize;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSGlyphInfo* *Mac OS X 10.2*

This class is used in attributed strings as a value for the attribute`NSGlyphInfoAttributeName` . Glyph in a mapping between a Unicode character code and a glyph ID, thus permitting clients to override the def represent some Unicode character.

```
@interface NSGlyphInfo : NSObject <NSCoding>
 // Class Methods
   + (NSGlyphInfo *)glyphInfoWithCharacterIdentifier:(unsigned int)cid
        collection:(NSCharacterCollection)characterCollection baseString:(NSString *)th
   + (NSGlyphInfo *)glyphInfoWithGlyph:(NSGlyph)glyph forFont:(NSFont *)font baseString
   + (NSGlyphInfo *)glyphInfoWithGlyphName:(NSString *)glyphName
        forFont:(NSFont *)font baseString:(NSString *)theString;
 // Instance Methods
   - (NSCharacterCollection)characterCollection;
   - (unsigned int)characterIdentifier;
   - (NSString *)glyphName;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSGraphicsContext — Mac OS X 10.0

This class is an interface to graphics context objects, which interpretdrawing commands based on a number of attributes that make up an environment for rendering.`NSGraphicsContext` can be used change a number of rendering options, such as whether or not antialiasing should be done, or whether image smoothing and interpolation should be used when drawing images.

```
@interface NSGraphicsContext : NSObject
 // Accessor Methods
   - (void)setImageInterpolation:(NSImageInterpolation)interpolation;
   - (NSImageInterpolation)imageInterpolation;
   - (void)setShouldAntialias:(BOOL)antialias;
   - (BOOL)shouldAntialias;
   - (void)setFocusStack:(void *)stack;
   - (void *)focusStack;
   - (void)setPatternPhase:(NSPoint)phase;
   - (NSPoint)patternPhase;
 // Class Methods
   + (NSGraphicsContext *)currentContext;
   + (BOOL)currentContextDrawingToScreen;
   + (NSGraphicsContext *)graphicsContextWithAttributes:(NSDictionary *)attributes;
   + (NSGraphicsContext *)graphicsContextWithWindow:(NSWindow *)window;
   + (void)restoreGraphicsState;
   + (void)saveGraphicsState;
   + (void)setCurrentContext:(NSGraphicsContext *)context;
   + (void)setGraphicsState:(int)gState;
 // Instance Methods
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (NSDictionary *)**attributes**; |
| - (void)**flushGraphics**; |
| - (void *)**graphicsPort**; |
| - (BOOL)**isDrawingToScreen**; |
| - (void)**restoreGraphicsState**; |
| - (void)**saveGraphicsState**; |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSHelpManager — Mac OS X 10.0

This class provides an interface to an application'shelp manager object used to provide online help in the application. You won't need to use this class, as Project Builder and Interface Builder provide support for integrating help documents with an application.

```
@interface NSHelpManager : NSObject
 // Accessor Methods
   - (void)setContextHelp:(NSAttributedString *)attrString forObject:(id)object;
 // Class Methods
   + (BOOL)isContextHelpModeActive;
   + (void)setContextHelpModeActive:(BOOL)active;
   + (NSHelpManager *)sharedHelpManager;
 // Instance Methods
   - (NSAttributedString *)contextHelpForObject:(id)object;
   - (void)removeContextHelpForObject:(id)object;
   - (BOOL)showContextHelpForObject:(id)object locationHint:(NSPoint)pt;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSImage

Mac OS X 10.0

This class is the general interface to images in the AppKit. Instances of `NSImage` usually have one or mor representations (instances of the class `NSImageRep` or one of its subclasses) associated with them. The p multiple image representations is so the image data can be rendered on a variety of devices, with each providing rendering functionality for a specific device.

```
@interface NSImage : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (NSArray *)imageFileTypes;
   + (id)imageNamed:(NSString *)name;
   + (NSArray *)imagePasteboardTypes;
   + (NSArray *)imageUnfilteredFileTypes;
   + (NSArray *)imageUnfilteredPasteboardTypes;
 // Initializers
   - (id)initByReferencingFile:(NSString *)fileName;
   - (id)initByReferencingURL:(NSURL *)url;
   - (id)initWithContentsOfFile:(NSString *)fileName;
   - (id)initWithContentsOfURL:(NSURL *)url;
   - (id)initWithData:(NSData *)data;
   - (id)initWithPasteboard:(NSPasteboard *)pasteboard;
   - (id)initWithSize:(NSSize)aSize;
 // Accessor Methods
   - (void)setSize:(NSSize)aSize;
   - (NSSize)size;
   - (void)setPrefersColorMatch:(BOOL)flag;
   - (BOOL)prefersColorMatch;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setCacheMode:(NSImageCacheMode)mode;
- (NSImageCacheMode)cacheMode;
- (void)setUsesEPSOnResolutionMismatch:(BOOL)flag;
- (BOOL)usesEPSOnResolutionMismatch;
- (void)setFlipped:(BOOL)flag;
- (void)setBackgroundColor:(NSColor *)aColor;
- (NSColor *)backgroundColor;
- (void)setDelegate:(id)anObject;
- (id)delegate;
- (void)setCachedSeparately:(BOOL)flag;
- (void)setCacheDepthMatchesImageDepth:(BOOL)flag;
- (BOOL)cacheDepthMatchesImageDepth;
- (BOOL)setName:(NSString *)string;
- (NSString *)name;
- (void)setScalesWhenResized:(BOOL)flag;
- (BOOL)scalesWhenResized;
- (void)setMatchesOnMultipleResolution:(BOOL)flag;
- (BOOL)matchesOnMultipleResolution;
- (void)setDataRetained:(BOOL)flag;
// Class Methods
+ (BOOL)canInitWithPasteboard:(NSPasteboard *)pasteboard;
// Instance Methods
- (void)addRepresentation:(NSImageRep *)imageRep;
- (NSData *)TIFFRepresentation;
- (NSData *)TIFFRepresentationUsingCompression:(NSTIFFCompression)comp factor:(floa
- (void)addRepresentations:(NSArray *)imageReps;
- (void)cancelIncrementalLoad;
- (void)compositeToPoint:(NSPoint)point fromRect:(NSRect)rect operation:(NSComposit:
- (void)compositeToPoint:(NSPoint)point fromRect:(NSRect)rect operation:(NSComposit:
    fraction:(float)delta;
- (void)compositeToPoint:(NSPoint)point operation:(NSCompositingOperation)op;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)compositeToPoint:(NSPoint)point operation:(NSCompositingOperation)op fractio
- (NSImageRep *)bestRepresentationForDevice:(NSDictionary *)deviceDescription;
- (void)dissolveToPoint:(NSPoint)point fraction:(float)aFloat;
- (void)dissolveToPoint:(NSPoint)point fromRect:(NSRect)rect fraction:(float)aFloat
- (void)drawAtPoint:(NSPoint)point fromRect:(NSRect)fromRect operation:(NSCompositi
    fraction:(float)delta;
- (void)drawInRect:(NSRect)rect fromRect:(NSRect)fromRect operation:(NSCompositingO
    fraction:(float)delta;
- (BOOL)drawRepresentation:(NSImageRep *)imageRep inRect:(NSRect)rect;
- (BOOL)isCachedSeparately;
- (BOOL)isDataRetained;
- (BOOL)isFlipped;
- (BOOL)isValid;
- (void)lockFocus;
- (void)lockFocusOnRepresentation:(NSImageRep *)imageRepresentation;
- (void)recache;
- (void)removeRepresentation:(NSImageRep *)imageRep;
- (NSArray *)representations;
- (void)unlockFocus;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implemented by the Delegate
- (void)image:(NSImage*)image didLoadPartOfRepresentation:(NSImageRep*)rep withVali
- (void)image:(NSImage*)image didLoadRepresentation:(NSImageRep*)rep
    withStatus:(NSImageLoadStatus)status;
- (void)image:(NSImage*)image didLoadRepresentationHeader:(NSImageRep*)rep;
- (void)image:(NSImage*)image willLoadRepresentation:(NSImageRep*)rep;
- (NSImage *)imageDidNotDraw:(id)sender inRect:(NSRect)aRect;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSImageCell — Mac OS X 10.0

This cell class is responsible for drawing an image in a frame. `NSImageCell` provides methods that allow clients to specify the frame style, as well as how images that do not fit in the cell bounds should be scaled.

```
@interface NSImageCell : NSCell <NSCoding, NSCopying>
 // Accessor Methods
   - (void)setImageAlignment:(NSImageAlignment)newAlign;
   - (NSImageAlignment)imageAlignment;
   - (void)setImageScaling:(NSImageScaling)newScaling;
   - (NSImageScaling)imageScaling;
   - (void)setImageFrameStyle:(NSImageFrameStyle)newStyle;
   - (NSImageFrameStyle)imageFrameStyle;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
 // Methods Implementing NSCopying
   - (id)copyWithZone:(NSZone *)zone;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSImageRep — Mac OS X 10.0

This is an abstract class that defines a general interface to image representations. NSImageRep subclasses allow NSImage to work with various image data formats using the common interface declared in NSImageRep.

```
@interface NSImageRep : NSObject <NSCoding, NSCopying>
 // Accessor Methods
   - (void)setSize:(NSSize)aSize;
   - (NSSize)size;
   - (void)setPixelsWide:(int)anInt;
   - (int)pixelsWide;
   - (void)setBitsPerSample:(int)anInt;
   - (int)bitsPerSample;
   - (void)setOpaque:(BOOL)flag;
   - (void)setPixelsHigh:(int)anInt;
   - (int)pixelsHigh;
   - (void)setAlpha:(BOOL)flag;
   - (void)setColorSpaceName:(NSString *)string;
   - (NSString *)colorSpaceName;
 // Class Methods
   + (BOOL)canInitWithData:(NSData *)data;
   + (BOOL)canInitWithPasteboard:(NSPasteboard *)pasteboard;
   + (NSArray *)imageFileTypes;
   + (NSArray *)imagePasteboardTypes;
   + (Class)imageRepClassForData:(NSData *)data;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (Class)imageRepClassForFileType:(NSString *)type;
+ (Class)imageRepClassForPasteboardType:(NSString *)type;
+ (id)imageRepWithContentsOfFile:(NSString *)filename;
+ (id)imageRepWithContentsOfURL:(NSURL *)url;
+ (id)imageRepWithPasteboard:(NSPasteboard *)pasteboard;
+ (NSArray *)imageRepsWithContentsOfFile:(NSString *)filename;
+ (NSArray *)imageRepsWithContentsOfURL:(NSURL *)url;
+ (NSArray *)imageRepsWithPasteboard:(NSPasteboard *)pasteboard;
+ (NSArray *)imageUnfilteredFileTypes;
+ (NSArray *)imageUnfilteredPasteboardTypes;
+ (void)registerImageRepClass:(Class)imageRepClass;
+ (NSArray *)registeredImageRepClasses;
+ (void)unregisterImageRepClass:(Class)imageRepClass;
// Instance Methods
- (BOOL)draw;
- (BOOL)drawAtPoint:(NSPoint)point;
- (BOOL)drawInRect:(NSRect)rect;
- (BOOL)hasAlpha;
- (BOOL)isOpaque;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Notifications
NSImageRepRegistryDidChangeNotification;
```

## Subclasses

NSBitmapImageRep, NSCachedImageRep, NSCustomImageRep, NSEPSImageRep, NSPDFImageRep, NSPICTImageRep

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSImageView — Mac OS X 10.0

This subclass of `NSView` is responsible for drawing an image in a frame, and provides functionality that allows users to set the displayed image by dropping an image over the view. Clients may access the `NSImage` displayed in the image view using the methods `setImage:` and `image`. The associated cell for this class is `NSImageCell`.

```
@interface NSImageView : NSControl
 // Accessor Methods
   - (void)setImage:(NSImage *)newImage;
   - (NSImage *)image;
   - (void)setImageAlignment:(NSImageAlignment)newAlign;
   - (NSImageAlignment)imageAlignment;
   - (void)setImageFrameStyle:(NSImageFrameStyle)newStyle;
   - (NSImageFrameStyle)imageFrameStyle;
   - (void)setImageScaling:(NSImageScaling)newScaling;
   - (NSImageScaling)imageScaling;
   - (void)setEditable:(BOOL)yn;
 // Instance Methods
   - (BOOL)isEditable;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# *NSInputManager* *Mac OS X 10.0*

This class is a key component of Cocoa's text input system, which also consists of the classes NSInputSe and NSTextView . This class sits between NSInputServer and NSTextView . Applications don't need to interact with this class directly, unless they are implementing a custom text input and management syst

```
@interface NSInputManager : NSObject <NSTextInput>
 // Class Methods
   + (NSInputManager *)currentInputManager;
   + (void)cycleToNextInputLanguage:(id)sender;
   + (void)cycleToNextInputServerInLanguage:(id)sender;
 // Instance Methods
   - (BOOL)handleMouseEvent:(NSEvent*)theMouseEvent;
   - (NSImage *)image;
   - (NSInputManager *)initWithName:(NSString *)inputServerName host:(NSString *)hostNa
   - (NSString*)language;
   - (NSString *)localizedInputManagerName;
   - (void)markedTextAbandoned:(id)cli;
   - (void)markedTextSelectionChanged:(NSRange)newSel client:(id)cli;
   - (NSInputServer*)server;
   - (BOOL)wantsToDelayTextChangeNotifications;
   - (BOOL)wantsToHandleMouseEvents;
   - (BOOL)wantsToInterpretAllKeystrokes;
 // Methods Implementing NSTextInput
   - (void)insertText:(id)aString;
   - (void)doCommandBySelector:(SEL)aSelector;
   - (void)setMarkedText:(id)aString selectedRange:(NSRange)selRange;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)unmarkText;
- (BOOL)hasMarkedText;
- (long)conversationIdentifier;
- (NSAttributedString *)attributedSubstringFromRange:(NSRange)theRange;
- (NSRange)markedRange;
- (NSRange)selectedRange;
- (NSRect)firstRectForCharacterRange:(NSRange)theRange;
- (unsigned int)characterIndexForPoint:(NSPoint)thePoint;
- (NSArray*)validAttributesForMarkedText;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSInputServer* *Mac OS X 10.0*

This class is a key component of the subsystem used to receive and processkeystrokes, and direct the a characters to the active text view to be added to the displayed text. The other two key classes of Cocoa' input system are `NSInputManager` and `NSTextView` . This class implements the interfaces declared in the `NSInputServiceProvider` and `NSInputServerMouseTracker` protocols. These two protocols declare the the functionality of `NSInputServer` . See the descriptions for these two protocols in Chapter 3for more information.

```
@interface NSInputServer : NSObject <NSInputServerMouseTracker, NSInputServiceProvider>
 // Instance Methods
   - (id) initWithDelegate:(id)aDelegate name:(NSString *)name;
 // Methods Implementing NSInputServerMouseTracker
   - (BOOL)mouseDownOnCharacterIndex:(unsigned)theIndex atCoordinate:(NSPoint)thePoint
       withModifier:(unsigned int)theFlags client:(id)sender;
   - (BOOL)mouseDraggedOnCharacterIndex:(unsigned)theIndex atCoordinate:(NSPoint)thePo
       withModifier:(unsigned int)theFlags client:(id)sender;
   - (void)mouseUpOnCharacterIndex:(unsigned)theIndex atCoordinate:(NSPoint)thePoint
       withModifier:(unsigned int)theFlags client:(id)sender;
 // Methods Implementing NSInputServiceProvider
   - (void)insertText:(id)aString client:(id)sender;
   - (void)doCommandBySelector:(SEL)aSelector client:(id)sender;
   - (void)markedTextAbandoned:(id)sender;
   - (void)markedTextSelectionChanged:(NSRange)newSel client:(id)sender;
   - (void)terminate:(id)sender;
   - (BOOL)canBeDisabled;
   - (BOOL)wantsToInterpretAllKeystrokes;
   - (BOOL)wantsToHandleMouseEvents;
   - (BOOL)wantsToDelayTextChangeNotifications;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)inputClientBecomeActive:(id)sender;
- (void)inputClientResignActive:(id)sender;
- (void)inputClientEnabled:(id)sender;
- (void)inputClientDisabled:(id)sender;
- (void)activeConversationWillChange:(id)sender fromOldConversation:(long)oldConver
- (void)activeConversationChanged:(id)sender toNewConversation:(long)newConversatio
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSLayoutManager* *Mac OS X 10.0*

NSLayoutManager is responsible for managing how text is laid out.NSLayoutManager objects manage a s
objects, and supervise how text is laid out in these containers. Additionally,NSLayoutManager is respons
character codes into glyphs that will be displayed in anNSTextView object. In terms of the Model-View-C
NSTextStorage is the model, NSTextView the view, and NSLayoutManager and NSTextContainer are co
layer and the view layer.

```
@interface NSLayoutManager : NSObject <NSCoding>
 // Initializers
   - (id)init;
 // Accessor Methods
   - (void)setDelegate:(id)delegate;
   - (id)delegate;
   - (void)setDefaultAttachmentScaling:(NSImageScaling)scaling;
   - (NSImageScaling)defaultAttachmentScaling;
   - (void)setTemporaryAttributes:(NSDictionary *)attrs forCharacterRange:(NSRange)char
   - (void)setAttachmentSize:(NSSize)attachmentSize forGlyphRange:(NSRange)glyphRange;
   - (void)setNotShownAttribute:(BOOL)flag forGlyphAtIndex:(unsigned)glyphIndex;
   - (void)setTypesetter:(NSTypesetter *)typesetter;
   - (NSTypesetter *)typesetter;
   - (void)setLocation:(NSPoint)location forStartOfGlyphRange:(NSRange)glyphRange;
   - (void)setCharacterIndex:(unsigned)charIndex forGlyphAtIndex:(unsigned)glyphIndex;
   - (void)setBackgroundLayoutEnabled:(BOOL)flag;
   - (BOOL)backgroundLayoutEnabled;
   - (void)setExtraLineFragmentRect:(NSRect)fragmentRect usedRect:(NSRect)usedRect
       textContainer:(NSTextContainer *)container;
   - (NSRect)extraLineFragmentRect;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setLineFragmentRect:(NSRect)fragmentRect forGlyphRange:(NSRange)glyphRange
    usedRect:(NSRect)usedRect;
- (void)setHyphenationFactor:(float)factor;
- (float)hyphenationFactor;
- (void)setUsesScreenFonts:(BOOL)flag;
- (BOOL)usesScreenFonts;
- (void)setIntAttribute:(int)attributeTag value:(int)val
  forGlyphAtIndex:(unsigned)glyphIndex;
- (void)setTypesetterBehavior:(NSTypesetterBehavior)theBehavior;
- (NSTypesetterBehavior)typesetterBehavior;
- (void)setTextStorage:(NSTextStorage *)textStorage;
- (NSTextStorage *)textStorage;
- (void)setShowsControlCharacters:(BOOL)flag;
- (BOOL)showsControlCharacters;
- (void)setDrawsOutsideLineFragment:(BOOL)flag forGlyphAtIndex:(unsigned)glyphIndex,
- (void)setShowsInvisibleCharacters:(BOOL)flag;
- (BOOL)showsInvisibleCharacters;
- (void)setTextContainer:(NSTextContainer *)container forGlyphRange:(NSRange)glyphRa
// Instance Methods
- (void)addTemporaryAttributes:(NSDictionary *)attrs forCharacterRange:(NSRange)char
- (void)addTextContainer:(NSTextContainer *)container;
- (NSSize)attachmentSizeForGlyphAtIndex:(unsigned)glyphIndex;
- (NSRect)boundingRectForGlyphRange:(NSRange)glyphRange inTextContainer:(NSTextConta
- (unsigned)characterIndexForGlyphAtIndex:(unsigned)glyphIndex;
- (NSRange)characterRangeForGlyphRange:(NSRange)glyphRange
    actualGlyphRange:(NSRangePointer)actualGlyphRange;
- (float)defaultLineHeightForFont:(NSFont *)theFont;
- (void)deleteGlyphsInRange:(NSRange)glyphRange;
- (void)drawBackgroundForGlyphRange:(NSRange)glyphsToShow atPoint:(NSPoint)origin;
- (void)drawGlyphsForGlyphRange:(NSRange)glyphsToShow atPoint:(NSPoint)origin;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)drawUnderlineForGlyphRange:(NSRange)glyphRange underlineType:(int)underline\
    baselineOffset:(float)baselineOffset lineFragmentRect:(NSRect)lineRect
    lineFragmentGlyphRange:(NSRange)lineGlyphRange containerOrigin:(NSPoint)contai
- (BOOL)drawsOutsideLineFragmentForGlyphAtIndex:(unsigned)glyphIndex;
- (NSTextContainer *)extraLineFragmentTextContainer;
- (NSRect)extraLineFragmentUsedRect;
- (NSTextView *)firstTextView;
- (unsigned)firstUnlaidCharacterIndex;
- (unsigned)firstUnlaidGlyphIndex;
- (float)fractionOfDistanceThroughGlyphForPoint:(NSPoint)point inTextContainer:(NSTe
- (void)getFirstUnlaidCharacterIndex:(unsigned *)charIndex glyphIndex:(unsigned *)g
- (unsigned)getGlyphs:(NSGlyph *)glyphArray range:(NSRange)glyphRange;
- (unsigned)getGlyphsInRange:(NSRange)glyphsRange glyphs:(NSGlyph *)glyphBuffer
    characterIndexes:(unsigned *)charIndexBuffer glyphInscriptions:(NSGlyphInscript
    elasticBits:(BOOL *)elasticBuffer;
- (unsigned)getGlyphsInRange:(NSRange)glyphsRange glyphs:(NSGlyph *)glyphBuffer
    characterIndexes:(unsigned *)charIndexBuffer glyphInscriptions:(NSGlyphInscript
    elasticBits:(BOOL *)elasticBuffer bidiLevels:(unsigned char *)bidiLevelBuffer;
- (NSGlyph)glyphAtIndex:(unsigned)glyphIndex;
- (NSGlyph)glyphAtIndex:(unsigned)glyphIndex isValidIndex:(BOOL *)isValidIndex;
- (unsigned)glyphIndexForPoint:(NSPoint)point inTextContainer:(NSTextContainer *)co
- (unsigned)glyphIndexForPoint:(NSPoint)point inTextContainer:(NSTextContainer *)co
    fractionOfDistanceThroughGlyph:(float *)partialFraction;
- (NSRange)glyphRangeForBoundingRect:(NSRect)bounds inTextContainer:(NSTextContaine
- (NSRange)glyphRangeForBoundingRectWithoutAdditionalLayout:(NSRect)bounds
    inTextContainer:(NSTextContainer *)container;
- (NSRange)glyphRangeForCharacterRange:(NSRange)charRange
    actualCharacterRange:(NSRangePointer)actualCharRange;
- (NSRange)glyphRangeForTextContainer:(NSTextContainer *)container;
- (void)insertGlyph:(NSGlyph)glyph atGlyphIndex:(unsigned)glyphIndex characterIndex:
- (void)insertTextContainer:(NSTextContainer *)container atIndex:(unsigned)index;
- (int)intAttribute:(int)attributeTag forGlyphAtIndex:(unsigned)glyphIndex;
- (void)invalidateDisplayForCharacterRange:(NSRange)charRange;
- (void)invalidateDisplayForGlyphRange:(NSRange)glyphRange;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)invalidateGlyphsForCharacterRange:(NSRange)charRange changeInLength:(int)de
    actualCharacterRange:(NSRangePointer)actualCharRange;
- (void)invalidateLayoutForCharacterRange:(NSRange)charRange isSoft:(BOOL)flag
    actualCharacterRange:(NSRangePointer)actualCharRange;
- (BOOL)isValidGlyphIndex:(unsigned)glyphIndex;
- (BOOL)layoutManagerOwnsFirstResponderInWindow:(NSWindow *)window;
- (NSRect)lineFragmentRectForGlyphAtIndex:(unsigned)glyphIndex
    effectiveRange:(NSRangePointer)effectiveGlyphRange;
- (NSRect)lineFragmentUsedRectForGlyphAtIndex:(unsigned)glyphIndex
    effectiveRange:(NSRangePointer)effectiveGlyphRange;
- (NSPoint)locationForGlyphAtIndex:(unsigned)glyphIndex;
- (BOOL)notShownAttributeForGlyphAtIndex:(unsigned)glyphIndex;
- (unsigned)numberOfGlyphs;
- (NSRange)rangeOfNominallySpacedGlyphsContainingIndex:(unsigned)glyphIndex;
- (NSRectArray)rectArrayForCharacterRange:(NSRange)charRange
    withinSelectedCharacterRange:(NSRange)selCharRange inTextContainer:(NSTextCont
    rectCount:(unsigned *)rectCount;
- (NSRectArray)rectArrayForGlyphRange:(NSRange)glyphRange withinSelectedGlyphRange:(
    inTextContainer:(NSTextContainer *)container rectCount:(unsigned *)rectCount;
- (void)removeTemporaryAttribute:(NSString *)name forCharacterRange:(NSRange)charRa
- (void)removeTextContainerAtIndex:(unsigned)index;
- (void)replaceGlyphAtIndex:(unsigned)glyphIndex withGlyph:(NSGlyph)newGlyph;
- (void)replaceTextStorage:(NSTextStorage *)newTextStorage;
- (NSView *)rulerAccessoryViewForTextView:(NSTextView *)view paragraphStyle:(NSPara
    ruler:(NSRulerView *)ruler enabled:(BOOL)isEnabled;
- (NSArray *)rulerMarkersForTextView:(NSTextView *)view paragraphStyle:(NSParagraphS
    ruler:(NSRulerView *)ruler;
- (void)showAttachmentCell:(NSCell *)cell inRect:(NSRect)rect characterIndex:(unsigr
- (void)showPackedGlyphs:(char *)glyphs length:(unsigned)glyphLen glyphRange:(NSRan
    atPoint:(NSPoint)point font:(NSFont *)font color:(NSColor *)color
    printingAdjustment:(NSSize)printingAdjustment;
- (NSFont *)substituteFontForFont:(NSFont *)originalFont;
- (NSDictionary *)temporaryAttributesAtCharacterIndex:(unsigned)charIndex
    effectiveRange:(NSRangePointer)effectiveCharRange;
- (void)textContainerChangedGeometry:(NSTextContainer *)container;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)textContainerChangedTextView:(NSTextContainer *)container;
- (NSTextContainer *)textContainerForGlyphAtIndex:(unsigned)glyphIndex
    effectiveRange:(NSRangePointer)effectiveGlyphRange;
- (NSArray *)textContainers;
- (void)textStorage:(NSTextStorage *)str edited:(unsigned)editedMask range:(NSRange)
    changeInLength:(int)delta invalidatedRange:(NSRange)invalidatedCharRange;
- (NSTextView *)textViewForBeginningOfSelection;
- (void)underlineGlyphRange:(NSRange)glyphRange underlineType:(int)underlineVal
    lineFragmentRect:(NSRect)lineRect lineFragmentGlyphRange:(NSRange)lineGlyphRan
    containerOrigin:(NSPoint)containerOrigin;
- (NSRect)usedRectForTextContainer:(NSTextContainer *)container;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implemented by the Delegate
- (void)layoutManager:(NSLayoutManager *)layoutManager
    didCompleteLayoutForTextContainer:(NSTextContainer *)textContainer atEnd:(BOOL
- (void)layoutManagerDidInvalidateLayout:(NSLayoutManager *)sender;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSMatrix

Mac OS X 10.0

This NSView subclass specializes in organizing groups of cells in agrid, and endowing them with various c that exhibited by radio buttons. Radio button groups are an example of an interface component impleme NSButtonCells .

```
@interface NSMatrix : NSControl
 // Initializers
   - (id)initWithFrame:(NSRect)frameRect;
   - (id)initWithFrame:(NSRect)frameRect mode:(int)aMode cellClass:(Class)factoryId nu
       numberOfColumns:(int)colsWide;
   - (id)initWithFrame:(NSRect)frameRect mode:(int)aMode prototype:(NSCell *)aCell numl
       numberOfColumns:(int)colsWide;
 // Accessor Methods
   - (void)setAllowsEmptySelection:(BOOL)flag;
   - (BOOL)allowsEmptySelection;
   - (void)setToolTip:(NSString *)toolTipString forCell:(NSCell *)cell;
   - (void)setCellClass:(Class)factoryId;
   - (Class)cellClass;
   - (void)setDelegate:(id)anObject;
   - (id)delegate;
   - (void)setAutoscroll:(BOOL)flag;
   - (void)setIntercellSpacing:(NSSize)aSize;
   - (NSSize)intercellSpacing;
   - (void)setValidateSize:(BOOL)flag;
   - (void)setCellBackgroundColor:(NSColor *)color;
   - (NSColor *)cellBackgroundColor;
   - (void)setMode:(NSMatrixMode)aMode;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSMatrixMode)mode;
- (void)setSelectionByRect:(BOOL)flag;
- (void)setSelectionFrom:(int)startPos to:(int)endPos anchor:(int)anchorPos highligl
- (void)setAutosizesCells:(BOOL)flag;
- (BOOL)autosizesCells;
- (void)setCellSize:(NSSize)aSize;
- (NSSize)cellSize;
- (void)setScrollable:(BOOL)flag;
- (void)setBackgroundColor:(NSColor *)color;
- (NSColor *)backgroundColor;
- (void)setDoubleAction:(SEL)aSelector;
- (SEL)doubleAction;
- (void)setPrototype:(NSCell *)aCell;
- (id)prototype;
- (void)setState:(int)value atRow:(int)row column:(int)col;
- (void)setDrawsBackground:(BOOL)flag;
- (BOOL)drawsBackground;
- (void)setDrawsCellBackground:(BOOL)flag;
- (BOOL)drawsCellBackground;
// Instance Methods
- (BOOL)acceptsFirstMouse:(NSEvent *)theEvent;
- (void)addColumn;
- (void)addColumnWithCells:(NSArray *)newCells;
- (void)addRow;
- (void)addRowWithCells:(NSArray *)newCells;
- (id)cellAtRow:(int)row column:(int)col;
- (NSRect)cellFrameAtRow:(int)row column:(int)col;
- (id)cellWithTag:(int)anInt;
- (NSArray *)cells;
- (void)deselectAllCells;
- (void)deselectSelectedCell;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)drawCellAtRow:(int)row column:(int)col;
- (void)getNumberOfRows:(int *)rowCount columns:(int *)colCount;
- (BOOL)getRow:(int *)row column:(int *)col forPoint:(NSPoint)aPoint;
- (BOOL)getRow:(int *)row column:(int *)col ofCell:(NSCell *)aCell;
- (void)highlightCell:(BOOL)flag atRow:(int)row column:(int)col;
- (void)insertColumn:(int)column;
- (void)insertColumn:(int)column withCells:(NSArray *)newCells;
- (void)insertRow:(int)row;
- (void)insertRow:(int)row withCells:(NSArray *)newCells;
- (BOOL)isAutoscroll;
- (BOOL)isSelectionByRect;
- (NSCell *)makeCellAtRow:(int)row column:(int)col;
- (void)mouseDown:(NSEvent *)theEvent;
- (int)mouseDownFlags;
- (int)numberOfColumns;
- (int)numberOfRows;
- (BOOL)performKeyEquivalent:(NSEvent *)theEvent;
- (void)putCell:(NSCell *)newCell atRow:(int)row column:(int)col;
- (void)removeColumn:(int)col;
- (void)removeRow:(int)row;
- (void)renewRows:(int)newRows columns:(int)newCols;
- (void)resetCursorRects;
- (void)scrollCellToVisibleAtRow:(int)row column:(int)col;
- (void)selectAll:(id)sender;
- (void)selectCellAtRow:(int)row column:(int)col;
- (BOOL)selectCellWithTag:(int)anInt;
- (void)selectText:(id)sender;
- (id)selectTextAtRow:(int)row column:(int)col;
- (id)selectedCell;
- (NSArray *)selectedCells;
- (int)selectedColumn;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (int)selectedRow;
- (BOOL)sendAction;
- (void)sendAction:(SEL)aSelector to:(id)anObject forAllCells:(BOOL)flag;
- (void)sendDoubleAction;
- (void)sizeToCells;
- (void)sortUsingFunction:(int (*)(id, id, void *))compare context:(void *)context;
- (void)sortUsingSelector:(SEL)comparator;
- (void)textDidBeginEditing:(NSNotification *)notification;
- (void)textDidChange:(NSNotification *)notification;
- (void)textDidEndEditing:(NSNotification *)notification;
- (BOOL)textShouldBeginEditing:(NSText *)textObject;
- (BOOL)textShouldEndEditing:(NSText *)textObject;
- (NSString *)toolTipForCell:(NSCell *)cell;
```

## Subclasses

NSForm

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSMenu* *Mac OS X 10.0*

This class provides an interface to an application's menus. Generally, you won't have to work directly wit menus since Interface Builder provides facilities for creating an application's entire menu structure, inclu the main menu bar, the Dock menu, contextual menus for views, and menus for pop-up buttons. Howev your application requires some degree of dynamicism in its menus, then you will need to use `NSMenu` 's A

Menus are initialized with `initWithTitle` :. The string passed in this method appears as the title of the menu. A menu manages a collection of menu items, which are instances of the class `NSMenuItem` . To ma a menu's items, we have several methods at our disposal. To add an item to the end of the menu, use `addItem` :; to insert an item at some position in the menu, use `insertItem:atIndex` :. Menu items are removed from a menu using the methods `removeItem` : and `removeItemAtIndex` :.

Menus can also be queried for their menu items. The method `itemArray` returns an `NSArray` containing t menu's items. Items can also be retrieved by their index, title, and tag using `itemAtIndex` :, `itemWithT` :, and `itemWithTag` :, respectively.

To add a submenu to a menu, first add a menu item to represent that submenu, and then associate ano instance of `NSMenu` with that menu item using the method `setSubmenu:forItem` :.

```
@interface NSMenu : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (BOOL)menuBarVisible;
   + (NSZone *)menuZone;
 // Initializers
   - (id)initWithTitle:(NSString *)aTitle;
 // Accessor Methods
   - (void)setTearOffMenuRepresentation:(id)menuRep;
   - (id)tearOffMenuRepresentation;
   - (void)setTitle:(NSString *)aString;
   - (NSString *)title;
   - (void)setSupermenu:(NSMenu *)supermenu;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSMenu *)supermenu;
- (void)setAutoenablesItems:(BOOL)flag;
- (BOOL)autoenablesItems;
- (void)setSubmenu:(NSMenu *)aMenu forItem:(id <NSMenuItem>)anItem;
- (void)setMenuRepresentation:(id)menuRep;
- (id)menuRepresentation;
- (void)setContextMenuRepresentation:(id)menuRep;
- (id)contextMenuRepresentation;
- (void)setMenuChangedMessagesEnabled:(BOOL)flag;
- (BOOL)menuChangedMessagesEnabled;
// Class Methods
  + (void)popUpContextMenu:(NSMenu*)menu withEvent:(NSEvent*)event forView:(NSView*)vi
  + (void)setMenuBarVisible:(BOOL)visible;
  + (void)setMenuZone:(NSZone *)aZone;
// Instance Methods
  - (NSMenu *)attachedMenu;
  - (void)addItem:(id <NSMenuItem>)newItem;
  - (id <NSMenuItem>)addItemWithTitle:(NSString *)aString action:(SEL)aSelector
      keyEquivalent:(NSString *)charCode;
  - (void)helpRequested:(NSEvent *)eventPtr;
  - (int)indexOfItem:(id <NSMenuItem>)index;
  - (int)indexOfItemWithRepresentedObject:(id)object;
  - (int)indexOfItemWithSubmenu:(NSMenu *)submenu;
  - (int)indexOfItemWithTag:(int)aTag;
  - (int)indexOfItemWithTarget:(id)target andAction:(SEL)actionSelector;
  - (int)indexOfItemWithTitle:(NSString *)aTitle;
  - (void)insertItem:(id <NSMenuItem>)newItem atIndex:(int)index;
  - (id <NSMenuItem>)insertItemWithTitle:(NSString *)aString action:(SEL)aSelector
      keyEquivalent:(NSString *)charCode atIndex:(int)index;
  - (BOOL)isAttached;
  - (BOOL)isTornOff;
  - (NSArray *)itemArray;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id <NSMenuItem>)itemAtIndex:(int)index;
- (void)itemChanged:(id <NSMenuItem>)item;
- (id <NSMenuItem>)itemWithTag:(int)tag;
- (id <NSMenuItem>)itemWithTitle:(NSString *)aTitle;
- (NSPoint)locationForSubmenu:(NSMenu *)aSubmenu;
- (int)numberOfItems;
- (void)performActionForItemAtIndex:(int)index;
- (BOOL)performKeyEquivalent:(NSEvent *)theEvent;
- (void)removeItem:(id <NSMenuItem>)item;
- (void)removeItemAtIndex:(int)index;
- (void)sizeToFit;
- (void)submenuAction:(id)sender;
- (void)update;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Notifications
NSMenuDidAddItemNotification;
NSMenuDidChangeItemNotification;
NSMenuDidRemoveItemNotification;
NSMenuDidSendActionNotification;
NSMenuWillSendActionNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSMenuItem

Mac OS X 10.0

This class declares the interface to objects that make up commands in an `NSMenu` . `NSMenuItems` have ar target and action, and may optionally have a key equivalent that the user can use to activate the menu are also capable of maintaining a state (`on` , `off` , or `mixed` ).

```
@interface NSMenuItem : NSObject <NSMenuItem>
 // Initializers
   - (id)initWithTitle:(NSString *)aString action:(SEL)aSelector keyEquivalent:(NSStri
 // Accessor Methods
   - (void)setAction:(SEL)aSelector;
   - (SEL)action;
   - (void)setRepresentedObject:(id)anObject;
   - (id)representedObject;
   - (void)setSubmenu:(NSMenu *)submenu;
   - (NSMenu *)submenu;
   - (void)setTag:(int)anInt;
   - (int)tag;
   - (void)setTitle:(NSString *)aString;
   - (NSString *)title;
   - (void)setTitleWithMnemonic:(NSString *)stringWithAmpersand;
   - (void)setKeyEquivalent:(NSString *)aKeyEquivalent;
   - (NSString *)keyEquivalent;
   - (void)setTarget:(id)anObject;
   - (id)target;
   - (void)setKeyEquivalentModifierMask:(unsigned int)mask;
   - (unsigned int)keyEquivalentModifierMask;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setEnabled:(BOOL)flag;
- (void)setMixedStateImage:(NSImage *)image;
- (NSImage *)mixedStateImage;
- (void)setMnemonicLocation:(unsigned)location;
- (unsigned)mnemonicLocation;
- (void)setOffStateImage:(NSImage *)image;
- (NSImage *)offStateImage;
- (void)setImage:(NSImage *)menuImage;
- (NSImage *)image;
- (void)setState:(int)state;
- (int)state;
- (void)setMenu:(NSMenu *)menu;
- (NSMenu *)menu;
- (void)setOnStateImage:(NSImage *)image;
- (NSImage *)onStateImage;
// Class Methods
+ (id <NSMenuItem>)separatorItem;
+ (void)setUsesUserKeyEquivalents:(BOOL)flag;
+ (BOOL)usesUserKeyEquivalents;
// Instance Methods
- (BOOL)hasSubmenu;
- (BOOL)isEnabled;
- (BOOL)isSeparatorItem;
- (NSString *)mnemonic;
- (NSString *)userKeyEquivalent;
// Methods Implementing NSMenuItem
- (id)initWithTitle:(NSString *)aString action:(SEL)aSelector keyEquivalent:(NSStri
- (void)setMenu:(NSMenu *)menu;
- (NSMenu *)menu;
- (BOOL)hasSubmenu;
- (void)setSubmenu:(NSMenu *)submenu;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSMenu *)submenu;
- (void)setTitle:(NSString *)aString;
- (NSString *)title;
- (BOOL)isSeparatorItem;
- (void)setKeyEquivalent:(NSString *)aKeyEquivalent;
- (NSString *)keyEquivalent;
- (void)setKeyEquivalentModifierMask:(unsigned int)mask;
- (unsigned int)keyEquivalentModifierMask;
- (NSString *)userKeyEquivalent;
- (unsigned int)userKeyEquivalentModifierMask;
- (void)setMnemonicLocation:(unsigned)location;
- (unsigned)mnemonicLocation;
- (NSString *)mnemonic;
- (void)setTitleWithMnemonic:(NSString *)stringWithAmpersand;
- (void)setImage:(NSImage *)menuImage;
- (NSImage *)image;
- (void)setState:(int)state;
- (int)state;
- (void)setOnStateImage:(NSImage *)image;
- (NSImage *)onStateImage;
- (void)setOffStateImage:(NSImage *)image;
- (NSImage *)offStateImage;
- (void)setMixedStateImage:(NSImage *)image;
- (NSImage *)mixedStateImage;
- (void)setEnabled:(BOOL)flag;
- (BOOL)isEnabled;
- (void)setTarget:(id)anObject;
- (id)target;
- (void)setAction:(SEL)aSelector;
- (SEL)action;
- (void)setTag:(int)anInt;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (int)tag;
```

```
- (void)setRepresentedObject:(id)anObject;
```

```
- (id)representedObject;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSMenuItemCell

Mac OS X 10.0

This class is used to represent and draw menu items in a menu view. This class has been deprecated an should not be used in new code. You should use the APIs provided by `NSMenu` and `NSMenuItem` instead.

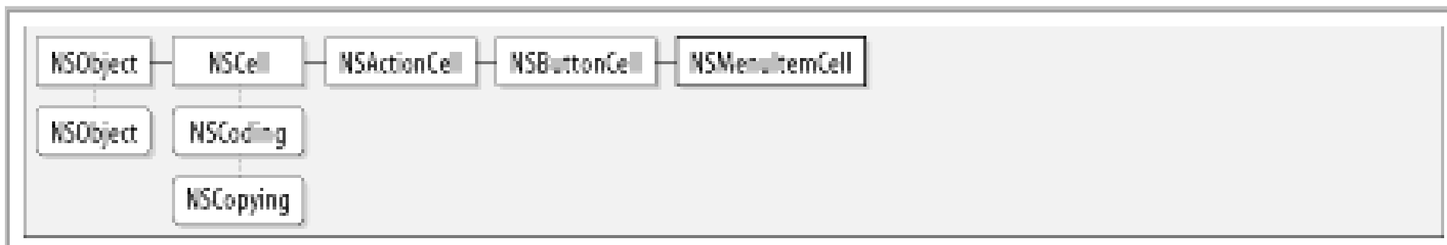


```
@interface NSMenuItemCell : NSButtonCell
 // Accessor Methods
   - (void)setNeedsSizing:(BOOL)flag;
   - (BOOL)needsSizing;
   - (void)setNeedsDisplay:(BOOL)flag;
   - (BOOL)needsDisplay;
   - (void)setHighlighted:(BOOL)flag;
   - (void)setMenuView:(NSMenuView *)menuView;
   - (NSMenuView *)menuView;
   - (void)setMenuItem:(NSMenuItem *)item;
   - (NSMenuItem *)menuItem;
 // Instance Methods
   - (void)calcSize;
   - (void)drawBorderAndBackgroundWithFrame:(NSRect)cellFrame inView:(NSView *)control
   - (void)drawImageWithFrame:(NSRect)cellFrame inView:(NSView *)controlView;
   - (void)drawKeyEquivalentWithFrame:(NSRect)cellFrame inView:(NSView *)controlView;
   - (void)drawSeparatorItemWithFrame:(NSRect)cellFrame inView:(NSView *)controlView;
   - (void)drawStateImageWithFrame:(NSRect)cellFrame  inView:(NSView *)controlView;
   - (void)drawTitleWithFrame:(NSRect)cellFrame inView:(NSView *)controlView;
   - (NSRect)imageRectForBounds:(NSRect)cellFrame;
   - (float)imageWidth;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isHighlighted;
- (NSRect)keyEquivalentRectForBounds:(NSRect)cellFrame;
- (float)keyEquivalentWidth;
- (NSRect)stateImageRectForBounds:(NSRect)cellFrame;
- (float)stateImageWidth;
- (NSRect)titleRectForBounds:(NSRect)cellFrame;
- (float)titleWidth;
```

## Subclasses

NSPopUpButtonCell

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSMenuView* *Mac OS X 10.0*

This subclass of `NSView` is used to draw menus. Like `NSMenuItemCell` , this class has been deprecated, a new code. You should use the APIs provided by `NSMenu` and `NSMenuItem` instead.

```
@interface NSMenuView : NSView
 // Initializers
   - (id)initAsTearOff;
   - (id)initWithFrame:(NSRect)frame;
 // Accessor Methods
   - (void)setWindowFrameForAttachingToRect:(NSRect)screenRect
       onScreen:(NSScreen *)screen preferredEdge:(NSRectEdge)edge popUpSelectedItem:(
   - (void)setHorizontalEdgePadding:(float)pad;
   - (float)horizontalEdgePadding;
   - (void)setNeedsDisplayForItemAtIndex:(int)index;
   - (void)setNeedsSizing:(BOOL)flag;
   - (BOOL)needsSizing;
   - (void)setHighlightedItemIndex:(int)index;
   - (int)highlightedItemIndex;
   - (void)setHorizontal:(BOOL)flag;
   - (void)setMenu:(NSMenu *)menu;
   - (NSMenu *)menu;
   - (void)setFont:(NSFont *)font;
   - (NSFont *)font;
   - (void)setMenuItemCell:(NSMenuItemCell *)cell forItemAtIndex:(int)index;
 // Class Methods
   + (float)menuBarHeight;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Instance Methods
- (void)attachSubmenuForItemAtIndex:(int)index;
- (NSMenu *)attachedMenu;
- (NSMenuView *)attachedMenuView;
- (void)detachSubmenu;
- (float)imageAndTitleOffset;
- (float)imageAndTitleWidth;
- (int)indexOfItemAtPoint:(NSPoint)point;
- (NSRect)innerRect;
- (BOOL)isAttached;
- (BOOL)isHorizontal;
- (BOOL)isTornOff;
- (void)itemAdded:(NSNotification *)notification;
- (void)itemChanged:(NSNotification *)notification;
- (void)itemRemoved:(NSNotification *)notification;
- (float)keyEquivalentOffset;
- (float)keyEquivalentWidth;
- (NSPoint)locationForSubmenu:(NSMenu *)aSubmenu;
- (NSMenuItemCell *)menuItemCellForItemAtIndex:(int)index;
- (void)performActionWithHighlightingForItemAtIndex:(int)index;
- (NSRect)rectOfItemAtIndex:(int)index;
- (void)sizeToFit;
- (float)stateImageOffset;
- (float)stateImageWidth;
- (BOOL)trackWithEvent:(NSEvent *)event;
- (void)update;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSMovie — Mac OS X 10.0

This class provides an object-oriented wrapper for QuickTime movie data, which allows clients to easily load QuickTime movies into memory. The data represented by an `NSMovie` object can be any format supported by the QuickTime APIs, including video, sound, and still images. Clients can obtain a pointer to the QuickTime data by sending a `QTMovie` message to the `NSMovie` instance; this pointer is suitable for use with any of the QuickTime APIs.

```
@interface NSMovie : NSObject <NSCoding, NSCopying>
 // Class Methods
   + (BOOL)canInitWithPasteboard:(NSPasteboard*)pasteboard;
   + (NSArray*)movieUnfilteredFileTypes;
   + (NSArray*)movieUnfilteredPasteboardTypes;
 // Instance Methods
   - (id)initWithMovie:(void* /*Movie*/)movie;
   - (id)initWithPasteboard:(NSPasteboard*)pasteboard;
   - (id)initWithURL:(NSURL*)url byReference:(BOOL)byRef;
   - (void*/*Movie*/)QTMovie;
   - (NSURL*)URL;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
 // Methods Implementing NSCopying
   - (id)copyWithZone:(NSZone *)zone;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSMovieView — Mac OS X 10.0

This class provides a means to display an `NSMovie` in an Cocoa view. `NSMovieView` has provisions to display in the view controls to control playback and editing of the represented movie. Additionally, action methods declared in the interface allow you to build custom interfaces for controlling movie playback and editing.

```
@interface NSMovieView : NSView
 // Accessor Methods
   - (void)setMuted:(BOOL)mute;
   - (void)setRate:(float)rate;
   - (float)rate;
   - (void)setLoopMode:(NSQTMovieLoopMode)mode;
   - (NSQTMovieLoopMode)loopMode;
   - (void)setVolume:(float)volume;
   - (float)volume;
   - (void)setPlaysEveryFrame:(BOOL)flag;
   - (BOOL)playsEveryFrame;
   - (void)setPlaysSelectionOnly:(BOOL)flag;
   - (BOOL)playsSelectionOnly;
   - (void)setEditable:(BOOL)editable;
 // Instance Methods
   - (void)cut:(id)sender;
   - (void)clear:(id)sender;
   - (void)gotoBeginning:(id)sender;
   - (NSMovie*)movie;
   - (void* /*MovieController*/)movieController;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (NSRect)**movieRect**; |
| - (void)**setMovie**:(NSMovie*)*movie*; |
| - (void)**copy**:(id)*sender*; |
| - (void)**gotoEnd**:(id)*sender*; |
| - (void)**gotoPosterFrame**:(id)*sender*; |
| - (BOOL)**isControllerVisible**; |
| - (BOOL)**isEditable**; |
| - (BOOL)**isMuted**; |
| - (BOOL)**isPlaying**; |
| - (void)**paste**:(id)*sender*; |
| - (void)**resizeWithMagnification**:(float)*magnification*; |
| - (void)**selectAll**:(id)*sender*; |
| - (void)**showController**:(BOOL)*show* **adjustingSize**:(BOOL)*adjustSize*; |
| - (NSSize)**sizeForMagnification**:(float)*magnification*; |
| - (void)**start**:(id)*sender*; |
| - (void)**stepBack**:(id)*sender*; |
| - (void)**stepForward**:(id)*sender*; |
| - (void)**stop**:(id)*sender*; |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSMutableParagraphStyle — Mac OS X 10.0

This class extends the interface of `NSParagraphStyle` to allow for the characteristics of a paragraph style object to be altered after the object is initialized. See the `NSParagraphStyle` class description later in this chapter for more information.

```
@interface NSMutableParagraphStyle : NSParagraphStyle
 // Accessor Methods
   - (void)setLineBreakMode:(NSLineBreakMode)mode;
   - (void)setParagraphSpacing:(float)aFloat;
   - (void)setAlignment:(NSTextAlignment)alignment;
   - (void)setBaseWritingDirection:(NSWritingDirection)writingDirection;
   - (void)setHeadIndent:(float)aFloat;
   - (void)setTailIndent:(float)aFloat;
   - (void)setParagraphStyle:(NSParagraphStyle *)obj;
   - (void)setLineSpacing:(float)aFloat;
   - (void)setMaximumLineHeight:(float)aFloat;
   - (void)setTabStops:(NSArray *)array;
   - (void)setMinimumLineHeight:(float)aFloat;
   - (void)setFirstLineHeadIndent:(float)aFloat;
 // Instance Methods
   - (void)addTabStop:(NSTextTab *)anObject;
   - (void)removeTabStop:(NSTextTab *)anObject;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSNibConnector

Mac OS X 10.0

This class represents a connection between two objects in Interface Builder. The Application Kit declares two subclasses that represent the two types of connections supported in Interface Builder: `NSNibControlConnection` and `NSNibOutletConnection`.

```
@interface NSNibConnector : NSObject <NSCoding>
 // Accessor Methods
   - (void)setLabel:(NSString *)label;
   - (NSString *)label;
   - (void)setSource:(id)source;
   - (id)source;
   - (void)setDestination:(id)destination;
   - (id)destination;
 // Instance Methods
   - (void)establishConnection;
   - (void)replaceObject:(id)oldObject withObject:(id)newObject;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
```

## Subclasses

`NSNibControlConnector`, `NSNibOutletConnector`



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSNibControlConnector* *Mac OS X 10.0*

This class represents an *action* connection between two objects in Interface Builder.

```
@interface NSNibControlConnector : NSNibConnector
 // Instance Methods
   - (void)establishConnection;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSNibOutletConnector* *Mac OS X 10.0*

This class represents an *outlet* connection between two objects in Interface Builder.

```
@interface NSNibOutletConnector : NSNibConnector
 // Instance Methods
   - (void)establishConnection;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSOpenGLContext* *Mac OS X 10.0*

This class provides an interface to objects that are responsible for interpreting and rendering calls to the
`NSOpenGLContext` supports rendering on the full screen (as would be done in a game), off-screen, or int
`NSOpenGLView` (which might be useful for data visualization applications).

```
@interface NSOpenGLContext : NSObject
 // Initializers
   - (id)initWithFormat:(NSOpenGLPixelFormat *)format shareContext:(NSOpenGLContext *)s
 // Accessor Methods
   - (void)setCurrentVirtualScreen:(int)screen;
   - (int)currentVirtualScreen;
   - (void)setFullScreen;
   - (void)setOffScreen:(void *)baseaddr width:(long)width height:(long)height rowbytes
   - (void)setValues:(const long *)vals forParameter:(NSOpenGLContextParameter)param;
   - (void)setView:(NSView *)view;
   - (NSView *)view;
 // Class Methods
   + (void)clearCurrentContext;
   + (NSOpenGLContext *)currentContext;
 // Instance Methods
   - (void)createTexture:(unsigned long/*GLenum*/)target fromView:(NSView*)view
       internalFormat:(unsigned long/*GLenum*/)format;
   - (void)clearDrawable;
   - (void)copyAttributesFromContext:(NSOpenGLContext *)context withMask:(unsigned long
   - (void)flushBuffer;
   - (void)getValues:(long *)vals forParameter:(NSOpenGLContextParameter)param;
   - (void)makeCurrentContext;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)update;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSOpenGLPixelFormat* *Mac OS X 10.0*

This class is used by `NSOpenGLContext` and `NSOpenGLView` to specify the attributes of an OpenGL pixel format, such as buffer size and type and rendering options.

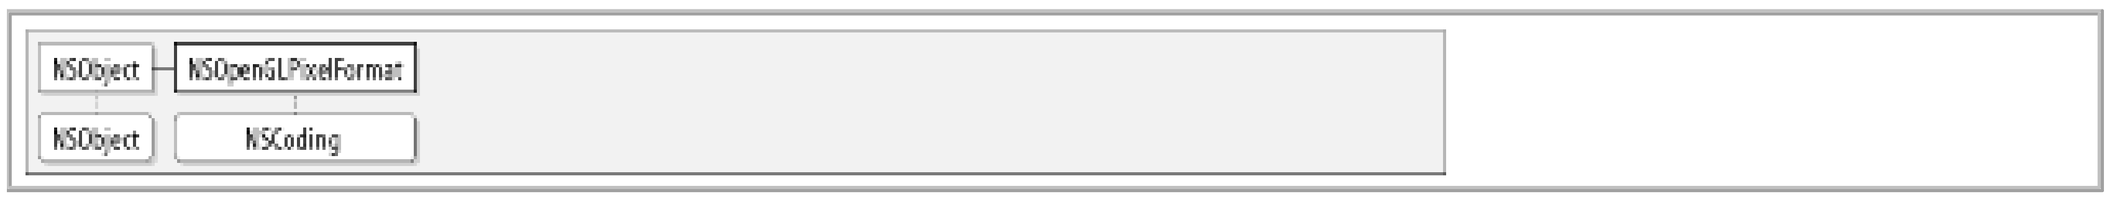


```
@interface NSOpenGLPixelFormat : NSObject <NSCoding>
// Initializers
  - (id)initWithAttributes:(NSOpenGLPixelFormatAttribute*)attribs;
  - (id)initWithData:(NSData*)attribs;
// Accessor Methods
  - (void)setAttributes:(NSData*)attribs;
  - (NSData*)attributes;
// Instance Methods
  - (void)getValues:(long*)vals forAttribute:(NSOpenGLPixelFormatAttribute)attrib
      forVirtualScreen:(int)screen;
  - (int)numberOfVirtualScreens;
// Methods Implementing NSCoding
  - (void)encodeWithCoder:(NSCoder *)aCoder;
  - (id)initWithCoder:(NSCoder *)aDecoder;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSOpenGLView* *Mac OS X 10.0*

This subclass of `NSView` allows applications to render calls to the OpenGL API into a Cocoa view hierarchy. Instances of this class maintain `NSOpenGLPixelFormat` and `NSOpenGLContext` objects to control many OpenGL rendering options and parameters.

```
@interface NSOpenGLView : NSView
 // Initializers
   - (id)initWithFrame:(NSRect)frameRect pixelFormat:(NSOpenGLPixelFormat*)format;
 // Accessor Methods
   - (void)setPixelFormat:(NSOpenGLPixelFormat*)pixelFormat;
   - (NSOpenGLPixelFormat*)pixelFormat;
   - (void)setOpenGLContext:(NSOpenGLContext*)context;
   - (NSOpenGLContext*)openGLContext;
 // Class Methods
   + (NSOpenGLPixelFormat*)defaultPixelFormat;
 // Instance Methods
   - (void)clearGLContext;
   - (void)reshape;
   - (void)update;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSOpenPanel* *Mac OS X 10.0*

This subclass of `NSSavePanel` implements a Mac OS X Open panel with which users are presented a files
choose files or directories for the application to open. The Open panel is created by invoking the class m
displayed onscreen using any of the `runModal..` . or `beginSheet..` . methods. After an Open panel has
application can obtain an array of the selected files or directories as paths or URLs using the method `fil`

```
@interface NSOpenPanel : NSSavePanel
 // Accessor Methods
   - (void)setCanChooseDirectories:(BOOL)flag;
   - (BOOL)canChooseDirectories;
   - (void)setCanChooseFiles:(BOOL)flag;
   - (BOOL)canChooseFiles;
   - (void)setResolvesAliases:(BOOL)flag;
   - (BOOL)resolvesAliases;
   - (void)setAllowsMultipleSelection:(BOOL)flag;
   - (BOOL)allowsMultipleSelection;
 // Class Methods
   + (NSOpenPanel *)openPanel;
 // Instance Methods
   - (NSArray *)URLs;
   - (void)beginSheetForDirectory:(NSString *)path file:(NSString *)name types:(NSArray
       modalForWindow:(NSWindow *)docWindow  modalDelegate:(id)delegate  didEndSelect
       contextInfo:(void *)contextInfo;
   - (NSArray *)filenames;
   - (int)runModalForDirectory:(NSString *)path file:(NSString *)name types:(NSArray *)
   - (int)runModalForDirectory:(NSString *)path file:(NSString *)name types:(NSArray *)
       relativeToWindow:(NSWindow*)window;
   - (int)runModalForTypes:(NSArray *)fileTypes;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSOutlineView* *Mac OS X 10.0*

This subclass of `NSTableView` implements a user interface component that can display hierarchical data structure is displayed in the Finder's list view). In an `NSOutlineView`, users can expand and collapse rov order of columns, and edit the contents of the outline. `NSOutlineView` objects rely on classes that imple `NSOutlineViewDataSource` protocol to provide the data to be displayed in the outline.

```
@interface NSOutlineView : NSTableView
 // Accessor Methods
   - (void)setAutosaveExpandedItems:(BOOL)save;
   - (BOOL)autosaveExpandedItems;
   - (void)setAutoresizesOutlineColumn:(BOOL)resize;
   - (BOOL)autoresizesOutlineColumn;
   - (void)setIndentationPerLevel:(float)indentationPerLevel;
   - (float)indentationPerLevel;
   - (void)setDropItem:(id)item dropChildIndex:(int)index;
   - (void)setIndentationMarkerFollowsCell:(BOOL)drawInCell;
   - (BOOL)indentationMarkerFollowsCell;
   - (void)setOutlineTableColumn:(NSTableColumn *)outlineTableColumn;
   - (NSTableColumn *)outlineTableColumn;
 // Instance Methods
   - (void)collapseItem:(id)item;
   - (void)collapseItem:(id)item collapseChildren:(BOOL)collapseChildren;
   - (void)expandItem:(id)item;
   - (void)expandItem:(id)item expandChildren:(BOOL)expandChildren;
   - (BOOL)isExpandable:(id)item;
   - (BOOL)isItemExpanded:(id)item;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id)itemAtRow:(int)row;
- (int)levelForItem:(id)item;
- (int)levelForRow:(int)row;
- (void)reloadItem:(id)item;
- (void)reloadItem:(id)item reloadChildren:(BOOL)reloadChildren;
- (int)rowForItem:(id)item;
- (BOOL)shouldCollapseAutoExpandedItemsForDeposited:(BOOL)deposited;
// Methods Implemented by the Delegate
- (BOOL)outlineView:(NSOutlineView *)outlineView shouldCollapseItem:(id)item;
- (BOOL)outlineView:(NSOutlineView *)outlineView shouldEditTableColumn:(NSTableColum
    item:(id)item;
- (BOOL)outlineView:(NSOutlineView *)outlineView shouldExpandItem:(id)item;
- (BOOL)outlineView:(NSOutlineView *)outlineView shouldSelectItem:(id)item;
- (BOOL)outlineView:(NSOutlineView *)outlineView shouldSelectTableColumn:(NSTableCol
- (void)outlineView:(NSOutlineView *)outlineView willDisplayCell:(id)cell
    forTableColumn:(NSTableColumn *)tableColumn item:(id)item;
- (void)outlineView:(NSOutlineView *)outlineView willDisplayOutlineCell:(id)cell
    forTableColumn:(NSTableColumn *)tableColumn item:(id)item;
- (void)outlineViewColumnDidMove:(NSNotification *)notification;
- (void)outlineViewColumnDidResize:(NSNotification *)notification;
- (void)outlineViewItemDidCollapse:(NSNotification *)notification;
- (void)outlineViewItemDidExpand:(NSNotification *)notification;
- (void)outlineViewItemWillCollapse:(NSNotification *)notification;
- (void)outlineViewItemWillExpand:(NSNotification *)notification;
- (void)outlineViewSelectionDidChange:(NSNotification *)notification;
- (void)outlineViewSelectionIsChanging:(NSNotification *)notification;
- (BOOL)selectionShouldChangeInOutlineView:(NSOutlineView *)outlineView;
// Notifications NSOutlineViewSelectionDidChangeNotification; NSOutlineViewSelectionIsC
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# NSPageLayout

Mac OS X 10.0

This class implements the Mac OS X Page Layout panel, with which users can specify page layout inform paper size and orientation. Page layout objects are created with the class layout `pageLayout` . The panel invoking either `runModal` , or `runModalWithPrintInfo` :. Alternatively, the page layout panel may be di

```
@interface NSPageLayout : NSObject
// Accessor Methods
  - (void)setAccessoryView:(NSView *)aView;
  - (NSView *)accessoryView;
  - (NSView *)accessoryView;
  - (void)setAccessoryView:(NSView *)aView;
// Class Methods
  + (NSPageLayout *)pageLayout;
  + (NSPageLayout *)pageLayout;
// Instance Methods
  - (void)beginSheetWithPrintInfo:(NSPrintInfo *)printInfo
      modalForWindow:(NSWindow *)docWindow delegate:(id)delegate didEndSelector:(SEL
      contextInfo:(void *)contextInfo;
  - (void)convertOldFactor:(float *)oldFactor newFactor:(float *)newFactor;
  - (void)pickedButton:(id)sender;
  - (void)pickedOrientation:(id)sender;
  - (void)pickedPaperSize:(id)sender;
  - (void)pickedUnits:(id)sender;
  - (NSPrintInfo *)printInfo;
  - (NSPrintInfo *)printInfo;
  - (void)readPrintInfo;
  - (void)readPrintInfo;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (int)runModal;
```


```
- (int)runModal;
```


```
- (int)runModalWithPrintInfo:(NSPrintInfo *)pInfo;
```


```
- (int)runModalWithPrintInfo:(NSPrintInfo *)pInfo;
```


```
- (void)writePrintInfo;
```


```
- (void)writePrintInfo;
```


[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSPanel* *Mac OS X 10.0*

This subclass extends the functionality of `NSWindow` that is useful for auxiliary and utility windows. In particular, panels are different from windows in several key ways. First, `NSPanel`s adopt the behavior that by default the panel will hide itself when its application becomes inactive. Second, `NSPanel`s are capable of becoming key windows, but they may never have main window status. Additionally, `NSPanel` object can be made to `float` above all other windows, making their contents easily accessible when other windows are in front.

```
@interface NSPanel : NSWindow
 // Accessor Methods
   - (void)setFloatingPanel:(BOOL)flag;
   - (void)setBecomesKeyOnlyIfNeeded:(BOOL)flag;
   - (BOOL)becomesKeyOnlyIfNeeded;
   - (void)setWorksWhenModal:(BOOL)flag;
   - (BOOL)worksWhenModal;
 // Instance Methods
   - (BOOL)isFloatingPanel;
```

### Subclasses

`NSColorPanel`, `NSFontPanel`, `NSSavePanel`



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSParagraphStyle* *Mac OS X 10.0*

Instances of this class are used in attributed strings to encapsulate paragraph and ruler characteristics to be applied to a range of text. Paragraph style attributes included such characteristics as paragraph alignment, line height and spacing, paragraph spacing, and more.`NSParagraphStyle` is an immutable class. If you require mutability, use its subclass,`NSMutableParagraphStyle` .

```
@interface NSParagraphStyle : NSObject <NSCoding, NSCopying, NSMutableCopying>
 // Class Methods
   + (NSParagraphStyle *)defaultParagraphStyle;
   + (NSWritingDirection)defaultWritingDirectionForLanguage:(NSString *)languageName;
 // Instance Methods
   - (NSTextAlignment)alignment;
   - (NSWritingDirection)baseWritingDirection;
   - (float)firstLineHeadIndent;
   - (float)headIndent;
   - (NSLineBreakMode)lineBreakMode;
   - (float)lineSpacing;
   - (float)maximumLineHeight;
   - (float)minimumLineHeight;
   - (float)paragraphSpacing;
   - (NSArray *)tabStops;
   - (float)tailIndent;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implementing NSMutableCopying
- (id)mutableCopyWithZone:(NSZone *)zone;
```

## Subclasses

NSMutableParagraphStyle

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# NSPasteboard

Mac OS X 10.0

This class provides access to the pasteboard server, which allows applications to share data with one another. A general purpose pasteboard is obtained using the class method `generalPasteboard` . Alternatively, clients can access one of the standard pasteboards (general, font, ruler, find, and drag), o create a private pasteboard using the class method `pasteboardWithName` :.

Data is read and written to a pasteboard using the methods `dataForType` : and `setData:forType` , respectively.

```
@interface NSPasteboard : NSObject
 // Convenience Constructors
   + (NSPasteboard *)pasteboardByFilteringData:(NSData *)data ofType:(NSString *)type;
   + (NSPasteboard *)pasteboardByFilteringFile:(NSString *)filename;
   + (NSPasteboard *)pasteboardByFilteringTypesInPasteboard:(NSPasteboard *)pboard;
   + (NSPasteboard *)pasteboardWithName:(NSString *)name;
   + (NSPasteboard *)pasteboardWithUniqueName;
 // Accessor Methods
   - (BOOL)setString:(NSString *)string forType:(NSString *)dataType;
   - (BOOL)setData:(NSData *)data forType:(NSString *)dataType;
   - (BOOL)setPropertyList:(id)plist forType:(NSString *)dataType;
 // Class Methods
   + (NSPasteboard *)generalPasteboard;
   + (NSArray *)typesFilterableTo:(NSString *)type;
 // Instance Methods
   - (NSString *)availableTypeFromArray:(NSArray *)types;
   - (int)addTypes:(NSArray *)newTypes owner:(id)newOwner;
   - (int)changeCount;
   - (NSData *)dataForType:(NSString *)dataType;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (int)declareTypes:(NSArray *)newTypes owner:(id)newOwner;
- (NSString *)name;
- (id)propertyListForType:(NSString *)dataType;
- (NSString *)readFileContentsType:(NSString *)type toFile:(NSString *)filename;
- (NSFileWrapper *)readFileWrapper;
- (void)releaseGlobally;
- (NSString *)stringForType:(NSString *)dataType;
- (NSArray *)types;
- (BOOL)writeFileContents:(NSString *)filename;
- (BOOL)writeFileWrapper:(NSFileWrapper *)wrapper;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSPDFImageRep* *Mac OS X 10.0*

This is a subclass of `NSImageRep` that understands how to manipulate, represent, and draw PDF-formatted image data.

```
@interface NSPDFImageRep : NSImageRep
 // Initializers
   - (id)initWithData:(NSData*)pdfData;
 // Class Methods
   + (id)imageRepWithData:(NSData*)pdfData;
 // Instance Methods
   - (int) currentPage;
   - (int) pageCount;
   - (void)setCurrentPage:(int)page;
   - (NSData*)PDFRepresentation;
   - (NSRect)bounds;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSPICTImageRep* *Mac OS X 10.0*

This is a subclass of `NSImageRep` that understands how to manipulate, represent, and draw Macintosh PICT-formatted image data.

```
@interface NSPICTImageRep : NSImageRep
 // Initializers
   - (id)initWithData:(NSData*)pictData;
 // Class Methods
   + (id)imageRepWithData:(NSData*)pictData;
 // Instance Methods
   - (NSRect) boundingBox;
   - (NSData*)PICTRepresentation;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSPopUpButton — Mac OS X 10.0

This class implements a pop-up button interface component. A pop-up button is a button that displays a menu when it is activated; the displayed menu can either be a pop-up menu that appears beneath the mouse cursor, or a pull-down menu that is drawn below the button.

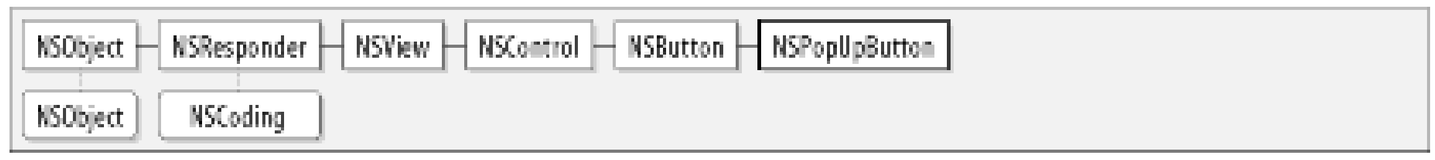


```
@interface NSPopUpButton : NSButton
 // Initializers
   - (id)initWithFrame:(NSRect)buttonFrame pullsDown:(BOOL)flag;
 // Accessor Methods
   - (void)setPullsDown:(BOOL)flag;
   - (BOOL)pullsDown;
   - (void)setTitle:(NSString *)aString;
   - (void)setAutoenablesItems:(BOOL)flag;
   - (BOOL)autoenablesItems;
   - (void)setPreferredEdge:(NSRectEdge)edge;
   - (NSRectEdge)preferredEdge;
   - (void)setMenu:(NSMenu *)menu;
   - (NSMenu *)menu;
 // Instance Methods
   - (void)addItemWithTitle:(NSString *)title;
   - (void)addItemsWithTitles:(NSArray *)itemTitles;
   - (int)indexOfItem:(id <NSMenuItem>)item;
   - (int)indexOfItemWithRepresentedObject:(id)obj;
   - (int)indexOfItemWithTag:(int)tag;
   - (int)indexOfItemWithTarget:(id)target andAction:(SEL)actionSelector;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (int)indexOfItemWithTitle:(NSString *)title;
- (int)indexOfSelectedItem;
- (void)insertItemWithTitle:(NSString *)title atIndex:(int)index;
- (NSArray *)itemArray;
- (id <NSMenuItem>)itemAtIndex:(int)index;
- (NSString *)itemTitleAtIndex:(int)index;
- (NSArray *)itemTitles;
- (id <NSMenuItem>)itemWithTitle:(NSString *)title;
- (id <NSMenuItem>)lastItem;
- (int)numberOfItems;
- (void)removeAllItems;
- (void)removeItemAtIndex:(int)index;
- (void)removeItemWithTitle:(NSString *)title;
- (void)selectItem:(id <NSMenuItem>)item;
- (void)selectItemAtIndex:(int)index;
- (void)selectItemWithTitle:(NSString *)title;
- (id <NSMenuItem>)selectedItem;
- (void)synchronizeTitleAndSelectedItem;
- (NSString *)titleOfSelectedItem;
// Notifications
NSPopUpButtonWillPopUpNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSPopUpButtonCell — Mac OS X 10.0

This class is the associated `NSCell` for an `NSPopUpButton` object that handles the drawing and mouse-handling for the control.

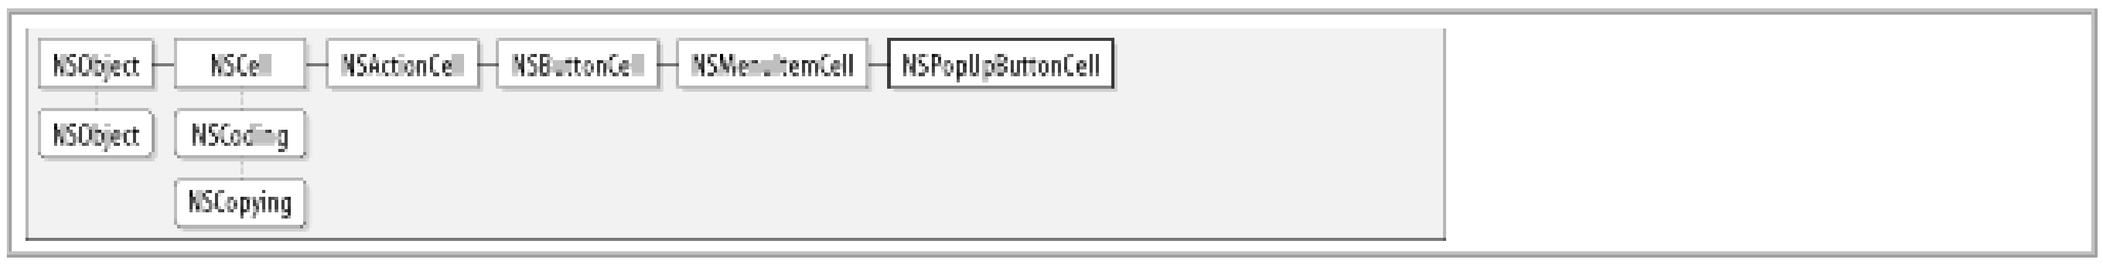


```
@interface NSPopUpButtonCell : NSMenuItemCell
 // Initializers
   - (id)initTextCell:(NSString *)stringValue pullsDown:(BOOL)pullDown;
 // Accessor Methods
   - (void)setAltersStateOfSelectedItem:(BOOL)flag;
   - (BOOL)altersStateOfSelectedItem;
   - (void)setTitle:(NSString *)aString;
   - (void)setArrowPosition:(NSPopUpArrowPosition)position;
   - (NSPopUpArrowPosition)arrowPosition;
   - (void)setPullsDown:(BOOL)flag;
   - (BOOL)pullsDown;
   - (void)setUsesItemFromMenu:(BOOL)flag;
   - (BOOL)usesItemFromMenu;
   - (void)setAutoenablesItems:(BOOL)flag;
   - (BOOL)autoenablesItems;
   - (void)setPreferredEdge:(NSRectEdge)edge;
   - (NSRectEdge)preferredEdge;
   - (void)setMenu:(NSMenu *)menu;
   - (NSMenu *)menu;
 // Instance Methods
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)addItemWithTitle:(NSString *)title;
- (void)addItemsWithTitles:(NSArray *)itemTitles;
- (void)attachPopUpWithFrame:(NSRect)cellFrame inView:(NSView *)controlView;
- (void)dismissPopUp;
- (int)indexOfItem:(id <NSMenuItem>)item;
- (int)indexOfItemWithRepresentedObject:(id)obj;
- (int)indexOfItemWithTag:(int)tag;
- (int)indexOfItemWithTarget:(id)target andAction:(SEL)actionSelector;
- (int)indexOfItemWithTitle:(NSString *)title;
- (int)indexOfSelectedItem;
- (void)insertItemWithTitle:(NSString *)title atIndex:(int)index;
- (NSArray *)itemArray;
- (id <NSMenuItem>)itemAtIndex:(int)index;
- (NSString *)itemTitleAtIndex:(int)index;
- (NSArray *)itemTitles;
- (id <NSMenuItem>)itemWithTitle:(NSString *)title;
- (id <NSMenuItem>)lastItem;
- (int)numberOfItems;
- (void)performClickWithFrame:(NSRect)frame inView:(NSView *)controlView;
- (void)removeAllItems;
- (void)removeItemAtIndex:(int)index;
- (void)removeItemWithTitle:(NSString *)title;
- (void)selectItem:(id <NSMenuItem>)item;
- (void)selectItemAtIndex:(int)index;
- (void)selectItemWithTitle:(NSString *)title;
- (id <NSMenuItem>)selectedItem;
- (void)synchronizeTitleAndSelectedItem;
- (NSString *)titleOfSelectedItem;
// Notifications
NSPopUpButtonCellWillPopUpNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSPrinter

Mac OS X 10.0

This class represents a printer as it is described in itsPPD file. Using this class, applications can obtain in the printers found in the Print Center application. To create an instance of`NSPrint` , use either the meth the method `printerWithType` :. If the printer indicated by the name or type does not exist in the Print methods will return `nil` . In these methods, *Type* refers to the make and model of the printer, while *Nan* given to the printer in Print Center. Applications can obtain arrays of the names and types of available p class methods `printerNames` and `printerTypes` , respectively.

```
@interface NSPrinter : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (NSArray *)printerNames;
   + (NSArray *)printerTypes;
   + (NSPrinter *)printerWithName:(NSString *)name;
   + (NSPrinter *)printerWithName:(NSString *)name domain:(NSString *)domain includeUna
   + (NSPrinter *)printerWithType:(NSString *)type;
 // Instance Methods
   - (BOOL)acceptsBinary;
   - (BOOL)booleanForKey:(NSString *)key inTable:(NSString *)table;
   - (NSDictionary *)deviceDescription;
   - (NSString *)domain;
   - (float)floatForKey:(NSString *)key inTable:(NSString *)table;
   - (NSString *)host;
   - (NSRect)imageRectForPaper:(NSString *)paperName;
   - (int)intForKey:(NSString *)key inTable:(NSString *)table;
   - (BOOL)isColor;
   - (BOOL)isFontAvailable:(NSString *)faceName;
   - (BOOL)isKey:(NSString *)key inTable:(NSString *)table;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isOutputStackInReverseOrder;
- (int)languageLevel;
- (NSString *)name;
- (NSString *)note;
- (NSSize)pageSizeForPaper:(NSString *)paperName;
- (NSRect)rectForKey:(NSString *)key inTable:(NSString *)table;
- (NSSize)sizeForKey:(NSString *)key inTable:(NSString *)table;
- (NSPrinterTableStatus)statusForTable:(NSString *)tableName;
- (NSString *)stringForKey:(NSString *)key inTable:(NSString *)table;
- (NSArray *)stringListForKey:(NSString *)key  inTable:(NSString *)table;
  - (NSString *)type;
// Methods Implementing NSCoding
  - (void)encodeWithCoder:(NSCoder *)aCoder;
  - (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
  - (id)copyWithZone:(NSZone *)zone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSPrintInfo

Mac OS X 10.0

This class encapsulates the information related to aprint job, such as margin sizes, paper orientation pagination type, and how the view contents should be positioned on the printed output (centered vertically, horizontally, no centering, etc.). Each application has a shared print info object that is used by default for all print jobs. This object is obtained using the class method`sharedPrintInfo`.

```
@interface NSPrintInfo : NSObject <NSCoding, NSCopying>
 // Initializers
   - (id)initWithDictionary:(NSDictionary *)attributes;
 // Accessor Methods
   - (void)setUpPrintOperationDefaultValues;
   - (void)setHorizontallyCentered:(BOOL)flag;
   - (void)setPaperName:(NSString *)name;
   - (NSString *)paperName;
   - (void)setPaperSize:(NSSize)size;
   - (NSSize)paperSize;
   - (void)setOrientation:(NSPrintingOrientation)orientation;
   - (NSPrintingOrientation)orientation;
   - (void)setPrinter:(NSPrinter *)printer;
   - (NSPrinter *)printer;
   - (void)setJobDisposition:(NSString *)disposition;
   - (NSString *)jobDisposition;
   - (void)setHorizontalPagination:(NSPrintingPaginationMode)mode;
   - (NSPrintingPaginationMode)horizontalPagination;
   - (void)setRightMargin:(float)margin;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (float)rightMargin;
- (void)setTopMargin:(float)margin;
- (float)topMargin;
- (void)setLeftMargin:(float)margin;
- (float)leftMargin;
- (void)setVerticallyCentered:(BOOL)flag;
- (void)setVerticalPagination:(NSPrintingPaginationMode)mode;
- (NSPrintingPaginationMode)verticalPagination;
- (void)setBottomMargin:(float)margin;
- (float)bottomMargin;
// Class Methods
+ (NSPrinter *)defaultPrinter;
+ (void)setDefaultPrinter:(NSPrinter *)printer;
+ (void)setSharedPrintInfo:(NSPrintInfo *)printInfo;
+ (NSPrintInfo *)sharedPrintInfo;
+ (NSSize)sizeForPaperName:(NSString *)name;
// Instance Methods
- (NSMutableDictionary *)dictionary;
- (NSRect)imageablePageBounds;
- (BOOL)isHorizontallyCentered;
- (BOOL)isVerticallyCentered;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSPrintOperation

Mac OS X 10.0

Instances of this class work with NSView and NSPrintInfo objects to coordinate the generation of EPS o output to a printer device. In Cocoa's printing system, NSPrintInfo objects provide information about o size and margin widths, while NSView objects are responsible for creating the actual output with the sam used for onscreen drawing.

```
@interface NSPrintOperation : NSObject
 // Accessor Methods
   - (void)setPageOrder:(NSPrintingPageOrder)order;
   - (NSPrintingPageOrder)pageOrder;
   - (void)setCanSpawnSeparateThread:(BOOL)canSpawnSeparateThread;
   - (BOOL)canSpawnSeparateThread;
   - (void)setJobStyleHint:(NSString *)hint;
   - (NSString *)jobStyleHint;
   - (void)setPrintInfo:(NSPrintInfo *)aPrintInfo;
   - (NSPrintInfo *)printInfo;
   - (void)setAccessoryView:(NSView *)aView;
   - (NSView *)accessoryView;
   - (void)setPrintPanel:(NSPrintPanel *)panel;
   - (NSPrintPanel *)printPanel;
   - (void)setShowPanels:(BOOL)flag;
   - (BOOL)showPanels;
 // Class Methods
   + (NSPrintOperation *)EPSOperationWithView:(NSView *)aView
        insideRect:(NSRect)rect toData:(NSMutableData *)data;
   + (NSPrintOperation *)EPSOperationWithView:(NSView *)aView
        insideRect:(NSRect)rect toData:(NSMutableData *)data printInfo:(NSPrintInfo *)a
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
+ (NSPrintOperation *)EPSOperationWithView:(NSView *)aView insideRect:(NSRect)rect t
    printInfo:(NSPrintInfo *)aPrintInfo;
```

```
+ (NSPrintOperation *)PDFOperationWithView:(NSView *)aView
    insideRect:(NSRect)rect toData:(NSMutableData *)data;
```

```
+ (NSPrintOperation *)PDFOperationWithView:(NSView *)aView
    insideRect:(NSRect)rect toData:(NSMutableData *)data printInfo:(NSPrintInfo *)a
```

```
+ (NSPrintOperation *)PDFOperationWithView:(NSView *)aView insideRect:(NSRect)rect t
    printInfo:(NSPrintInfo *)aPrintInfo;
```

```
+ (NSPrintOperation *)currentOperation;
```

```
+ (NSPrintOperation *)printOperationWithView:(NSView *)aView;
```

```
+ (NSPrintOperation *)printOperationWithView:(NSView *)aView printInfo:(NSPrintInfo
```

```
+ (void)setCurrentOperation:(NSPrintOperation *)operation;
```

```
// Instance Methods
```

```
- (void)cleanUpOperation;
```

```
- (BOOL)deliverResult;
```

```
- (NSGraphicsContext *)createContext;
```

```
- (int)currentPage;
```

```
- (NSGraphicsContext *)context;
```

```
- (void)destroyContext;
```

```
- (BOOL)isCopyingOperation;
```

```
- (BOOL)runOperation;
```

```
- (void)runOperationModalForWindow:(NSWindow *)docWindow delegate:(id)delegate
    didRunSelector:(SEL)didRunSelector contextInfo:(void *)contextInfo;
```

```
- (NSView *)view;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSPrintPanel* *Mac OS X 10.0*

This class provides the Mac OS X Print panel interface for Cocoa applications. To obtain an instance of NS use the class method `printPanel` . The panel is displayed and run when the `runModal` method is invoke display the print panel as a window. It is also possible to display the print panel as a sheet attached to t window; this is done with the method `beginSheetWithPrintInfo:modalFor-Window: delegate:didEndSelector:contextInfo` :.

Cocoa allows you to attach an accessory view to the print panel, providing an interface for users to conf related to how your application handles printing. To set the accessory view, use the method `setAccesso`

```
@interface NSPrintPanel : NSObject
 // Accessor Methods
   - (void)setAccessoryView:(NSView *)aView;
   - (NSView *)accessoryView;
   - (void)setJobStyleHint:(NSString *)hint;
   - (NSString *)jobStyleHint;
 // Class Methods
   + (NSPrintPanel *)printPanel;
 // Instance Methods
   - (void)beginSheetWithPrintInfo:(NSPrintInfo *)printInfo modalForWindow:(NSWindow *
       delegate:(id)delegate didEndSelector:(SEL)didEndSelector contextInfo:(void *)c
   - (void)finalWritePrintInfo;
   - (void)pickedAllPages:(id)sender;
   - (void)pickedButton:(id)sender;
   - (void)pickedLayoutList:(id)sender;
   - (int)runModal;
   - (void)updateFromPrintInfo;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSProgressIndicator — Mac OS X 10.0

This class implements a progress bar interface component. Cocoa progress indicators may either be determinate or indeterminate. A *determinate* progress indicator shows progress by filling the bar proportionate to the amount of work that has been done. An *indeterminate* progress indicator displays the spinning barber pole to show that an application is busy with a task.

```
@interface NSProgressIndicator : NSView
 // Accessor Methods
   - (void)setBezeled:(BOOL)flag;
   - (void)setIndeterminate:(BOOL)flag;
   - (void)setMaxValue:(double)newMaximum;
   - (double)maxValue;
   - (void)setDoubleValue:(double)doubleValue;
   - (double)doubleValue;
   - (void)setAnimationDelay:(NSTimeInterval)delay;
   - (NSTimeInterval)animationDelay;
   - (void)setUsesThreadedAnimation:(BOOL)threadedAnimation;
   - (BOOL)usesThreadedAnimation;
   - (void)setMinValue:(double)newMinimum;
   - (double)minValue;
   - (void)setControlTint:(NSControlTint)tint;
   - (NSControlTint)controlTint;
   - (void)setControlSize:(NSControlSize)size;
   - (NSControlSize)controlSize;
 // Instance Methods
   - (BOOL)isDisplayedWhenStopped;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (void)**setDisplayedWhenStopped**:(BOOL)*isDisplayed*; |
| - (void)**setStyle**:(NSProgressIndicatorStyle)*style*; |
| - (void)**sizeToFit**; |
| - (NSProgressIndicatorStyle)**style**; |
| - (void)**animate**:(id)*sender*; |
| - (void)**incrementBy**:(double)*delta*; |
| - (BOOL)**isBezeled**; |
| - (BOOL)**isIndeterminate**; |
| - (void)**startAnimation**:(id)*sender*; |
| - (void)**stopAnimation**:(id)*sender*; |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSQuickDrawView* *Mac OS X 10.0*

This subclass of `NSView` provides a destination in a Cocoa view for the QuickDraw drawing commands that are part of the Carbon APIs.

```
@interface NSQuickDrawView : NSView
 // Instance Methods
   - (void*)qdPort;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# NSResponder

Mac OS X 10.0

This abstract class provides the basis of the Application Kit's event handling system. NSResponder is the superclass of the three cornerstone classes of the AppKit: NSApplication , NSView , and NSWindow . The methods in this class are overridden by subclasses to handle mouse and key event handling messages. more information about AppKit event handling with NSResponder , see Chapter 3 .

```
@interface NSResponder : NSObject <NSCoding>
 // Accessor Methods
   - (void)setInterfaceStyle:(NSInterfaceStyle)interfaceStyle;
   - (NSInterfaceStyle)interfaceStyle;
   - (void)setMark:(id)sender;
   - (void)setNextResponder:(NSResponder *)aResponder;
   - (NSResponder *)nextResponder;
   - (void)setMenu:(NSMenu *)menu;
   - (NSMenu *)menu;
 // Instance Methods
   - (BOOL)acceptsFirstResponder;
   - (BOOL)becomeFirstResponder;
   - (void)capitalizeWord:(id)sender;
   - (void)centerSelectionInVisibleArea:(id)sender;
   - (void)changeCaseOfLetter:(id)sender;
   - (void)complete:(id)sender;
   - (void)deleteBackward:(id)sender;
   - (void)deleteForward:(id)sender;
   - (void)deleteToBeginningOfLine:(id)sender;
   - (void)deleteToBeginningOfParagraph:(id)sender;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)deleteToEndOfLine:(id)sender;
- (void)deleteToEndOfParagraph:(id)sender;
- (void)deleteToMark:(id)sender;
- (void)deleteWordBackward:(id)sender;
- (void)deleteWordForward:(id)sender;
- (void)doCommandBySelector:(SEL)aSelector;
- (void)flagsChanged:(NSEvent *)theEvent;
- (void)flushBufferedKeyEvents;
- (void)helpRequested:(NSEvent *)eventPtr;
- (void)indent:(id)sender;
- (void)insertBacktab:(id)sender;
- (void)insertNewline:(id)sender;
- (void)insertNewlineIgnoringFieldEditor:(id)sender;
- (void)insertParagraphSeparator:(id)sender;
- (void)insertTab:(id)sender;
- (void)insertTabIgnoringFieldEditor:(id)sender;
- (void)insertText:(id)insertString;
- (void)interpretKeyEvents:(NSArray *)eventArray;
- (void)keyDown:(NSEvent *)theEvent;
- (void)keyUp:(NSEvent *)theEvent;
- (void)lowercaseWord:(id)sender;
- (void)mouseDown:(NSEvent *)theEvent;
- (void)mouseDragged:(NSEvent *)theEvent;
- (void)mouseEntered:(NSEvent *)theEvent;
- (void)mouseExited:(NSEvent *)theEvent;
- (void)mouseMoved:(NSEvent *)theEvent;
- (void)mouseUp:(NSEvent *)theEvent;
- (void)moveBackward:(id)sender;
- (void)moveBackwardAndModifySelection:(id)sender;
- (void)moveDown:(id)sender;
- (void)moveDownAndModifySelection:(id)sender;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)moveForward:(id)sender;
- (void)moveForwardAndModifySelection:(id)sender;
- (void)moveLeft:(id)sender;
- (void)moveRight:(id)sender;
- (void)moveToBeginningOfDocument:(id)sender;
- (void)moveToBeginningOfLine:(id)sender;
- (void)moveToBeginningOfParagraph:(id)sender;
- (void)moveToEndOfDocument:(id)sender;
- (void)moveToEndOfLine:(id)sender;
- (void)moveToEndOfParagraph:(id)sender;
- (void)moveUp:(id)sender;
- (void)moveUpAndModifySelection:(id)sender;
- (void)moveWordBackward:(id)sender;
- (void)moveWordBackwardAndModifySelection:(id)sender;
- (void)moveWordForward:(id)sender;
- (void)moveWordForwardAndModifySelection:(id)sender;
- (void)noResponderFor:(SEL)eventSelector;
- (void)otherMouseDown:(NSEvent *)theEvent;
- (void)otherMouseDragged:(NSEvent *)theEvent;
- (void)otherMouseUp:(NSEvent *)theEvent;
- (void)pageDown:(id)sender;
- (void)pageUp:(id)sender;
- (BOOL)performKeyEquivalent:(NSEvent *)theEvent;
- (BOOL)resignFirstResponder;
- (void)rightMouseDown:(NSEvent *)theEvent;
- (void)rightMouseDragged:(NSEvent *)theEvent;
- (void)rightMouseUp:(NSEvent *)theEvent;
- (void)scrollLineDown:(id)sender;
- (void)scrollLineUp:(id)sender;
- (void)scrollPageDown:(id)sender;
- (void)scrollPageUp:(id)sender;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)scrollWheel:(NSEvent *)theEvent;
- (void)selectAll:(id)sender;
- (void)selectLine:(id)sender;
- (void)selectParagraph:(id)sender;
- (void)selectToMark:(id)sender;
- (void)selectWord:(id)sender;
- (BOOL)shouldBeTreatedAsInkEvent:(NSEvent *)theEvent;
- (void)showContextHelp:(id)sender;
- (void)swapWithMark:(id)sender;
- (void)transpose:(id)sender;
- (void)transposeWords:(id)sender;
- (BOOL)tryToPerform:(SEL)anAction with:(id)anObject;
- (NSUndoManager *)undoManager;
- (void)uppercaseWord:(id)sender;
- (id)validRequestorForSendType:(NSString *)sendType returnType:(NSString *)returnTy
- (void)yank:(id)sender;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
```

## Subclasses

NSApplication , NSDrawer , NSView , NSWindow , NSWindowController

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSRulerMarker

Mac OS X 10.0

Instances of this class are used to display symbolic markers in an NSRulerView . An example of ruler vie text documents use to indicate the position of tab stops or table columns. Markers are initialized with an position in that view, an image used to represent the marker in the ruler view, and an NSPoint that spec should be treated as the marker origin.

```
@interface NSRulerMarker : NSObject <NSCoding, NSCopying>
 // Initializers
   - (id)initWithRulerView:(NSRulerView *)ruler markerLocation:(float)location image:(
       imageOrigin:(NSPoint)imageOrigin;
 // Accessor Methods
   - (void)setRepresentedObject:(id <NSCopying>)representedObject;
   - (id <NSCopying>)representedObject;
   - (void)setImageOrigin:(NSPoint)imageOrigin;
   - (NSPoint)imageOrigin;
   - (void)setMarkerLocation:(float)location;
   - (float)markerLocation;
   - (void)setMovable:(BOOL)flag;
   - (void)setImage:(NSImage *)image;
   - (NSImage *)image;
   - (void)setRemovable:(BOOL)flag;
 // Instance Methods
   - (void)drawRect:(NSRect)rect;
   - (NSRect)imageRectInRuler;
   - (BOOL)isDragging;
   - (BOOL)isMovable;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isRemovable;
- (NSRulerView *)ruler;
- (float)thicknessRequiredInRuler;
- (BOOL)trackMouse:(NSEvent *)mouseDownEvent adding:(BOOL)isAdding;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implemented by the Delegate
- (void)rulerView:(NSRulerView *)ruler didAddMarker:(NSRulerMarker *)marker;
- (void)rulerView:(NSRulerView *)ruler didMoveMarker:(NSRulerMarker *)marker;
- (void)rulerView:(NSRulerView *)ruler didRemoveMarker:(NSRulerMarker *)marker;
- (void)rulerView:(NSRulerView *)ruler handleMouseDown:(NSEvent *)event;
- (BOOL)rulerView:(NSRulerView *)ruler shouldAddMarker:(NSRulerMarker *)marker;
- (BOOL)rulerView:(NSRulerView *)ruler shouldMoveMarker:(NSRulerMarker *)marker;
- (BOOL)rulerView:(NSRulerView *)ruler shouldRemoveMarker:(NSRulerMarker *)marker;
- (float)rulerView:(NSRulerView *)ruler willAddMarker:(NSRulerMarker *)marker atLoca
- (float)rulerView:(NSRulerView *)ruler willMoveMarker:(NSRulerMarker *)marker toLo
- (void)rulerView:(NSRulerView *)ruler willSetClientView:(NSView *)newClient;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSRulerView* *Mac OS X 10.0*

This is a subclass of `NSView` and is used to draw rulers in an `NSScrollView` . A ruler view keeps track of to convert measurements between pixels and whatever unit the client specifies should be displayed by t ruler view may contain ruler markers, which are instances of the class `NSRulerMarker` .

```
@interface NSRulerView : NSView
 // Initializers
   - (id)initWithScrollView:(NSScrollView *)scrollView orientation:(NSRulerOrientation)
 // Accessor Methods
   - (void)setReservedThicknessForAccessoryView:(float)thickness;
   - (float)reservedThicknessForAccessoryView;
   - (void)setScrollView:(NSScrollView *)scrollView;
   - (NSScrollView *)scrollView;
   - (void)setOriginOffset:(float)offset;
   - (float)originOffset;
   - (void)setOrientation:(NSRulerOrientation)orientation;
   - (NSRulerOrientation)orientation;
   - (void)setClientView:(NSView *)client;
   - (NSView *)clientView;
   - (void)setReservedThicknessForMarkers:(float)thickness;
   - (float)reservedThicknessForMarkers;
   - (void)setMarkers:(NSArray *)markers;
   - (NSArray *)markers;
   - (void)setRuleThickness:(float)thickness;
   - (float)ruleThickness;
   - (void)setAccessoryView:(NSView *)accessory;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSView *)accessoryView;
- (void)setMeasurementUnits:(NSString *)unitName;
- (NSString *)measurementUnits;
// Class Methods
+ (void)registerUnitWithName:(NSString *)unitName abbreviation:(NSString *)abbreviat
    unitToPointsConversionFactor:(float)conversionFactor tepUpCycle:(NSArray *)step
    stepDownCycle:(NSArray *)stepDownCycle;
// Instance Methods
- (void)addMarker:(NSRulerMarker *)marker;
- (float)baselineLocation;
- (void)drawHashMarksAndLabelsInRect:(NSRect)rect;
- (void)drawMarkersInRect:(NSRect)rect;
- (void)invalidateHashMarks;
- (BOOL)isFlipped;
- (void)moveRulerlineFromLocation:(float)oldLocation toLocation:(float)newLocation;
- (void)removeMarker:(NSRulerMarker *)marker;
- (float)requiredThickness;
- (BOOL)trackMarker:(NSRulerMarker *)marker withMouseEvent:(NSEvent *)event;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# NSSavePanel

Mac OS X 10.0

This class is an implementation of the complete Mac OS X fileSave dialog, which clients can use to prese saving files. It is possible to provide an accessory view to be displayed on the bottom part of the Save p used to provide additional parameters that should be used in the Save operation. A graphics application accessory view to provide controls for the user to specify compression and format options for the file to

```
@interface NSSavePanel : NSPanel
 // Accessor Methods
   - (void)setTreatsFilePackagesAsDirectories:(BOOL)flag;
   - (BOOL)treatsFilePackagesAsDirectories;
   - (void)setAccessoryView:(NSView *)aView;
   - (NSView *)accessoryView;
   - (void)setExtensionHidden:(BOOL)flag;
   - (void)setCanSelectHiddenExtension:(BOOL)flag;
   - (void)setDelegate:(id)anObject;
   - (void)setDirectory:(NSString *)path;
   - (NSString *)directory;
   - (void)setPrompt:(NSString *)prompt;
   - (NSString *)prompt;
   - (void)setTitle:(NSString *)title;
   - (NSString *)title;
   - (void)setRequiredFileType:(NSString *)type;
   - (NSString *)requiredFileType;
 // Class Methods
   + (NSSavePanel *)savePanel;
 // Instance Methods
   - (void)cancel:(id)sender;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)beginSheetForDirectory:(NSString *)path file:(NSString *)name modalForWindow
    modalDelegate:(id)delegate didEndSelector:(SEL)didEndSelector contextInfo:(voi
- (NSURL *)URL;
- (NSString *)filename;
- (void)ok:(id)sender;
- (int)runModal;
- (int)runModalForDirectory:(NSString *)path file:(NSString *)name;
- (int)runModalForDirectory:(NSString *)path file:(NSString *)name relativeToWindow:
- (void)selectText:(id)sender;
- (BOOL)isExpanded;
- (BOOL)isExtensionHidden;
- (void)validateVisibleColumns;
// Methods Implemented by the Delegate
- (NSComparisonResult)panel:(id)sender compareFilename:(NSString *)file1 with:(NSSt
    caseSensitive:(BOOL)caseSensitive;
- (BOOL)panel:(id)sender  isValidFilename:(NSString *)filename;
- (BOOL)panel:(id)sender shouldShowFilename:(NSString *)filename;
- (NSString *)panel:(id)sender userEnteredFilename:(NSString *)filename confirmed:(
- (void)panel:(id)sender willExpand:(BOOL)expanding;
```

## Subclasses

NSOpenPanel

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSScreen — Mac OS X 10.0

This class represents a user's monitor, and allows clients to ascertain properties of the display such as width and height in pixels, or color bit-depth. This class works only in the presence of an instance of `NSApplication`; `NSScreen` requires that an application have a connection to the window server to obtain information about the screen, which is provided by `NSApplication`.

```
@interface NSScreen : NSObject
 // Convenience Constructors
   + (NSArray *)screens;
 // Class Methods
   + (NSScreen *)deepestScreen;
   + (NSScreen *)mainScreen;
 // Instance Methods
   - (NSWindowDepth)depth;
   - (NSDictionary *)deviceDescription;
   - (NSRect)frame;
   - (const NSWindowDepth *)supportedWindowDepths;
   - (NSRect)visibleFrame;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSScroller — Mac OS X 10.0

This class represents the scrollbar control of ascroll view, and is used to control the scrolling of a document within a scroll view's clip view. There is usually no need to work with `NSScroller` objects in code, as they are completely configured within a scroll view by Interface Builder.

```
@interface NSScroller : NSControl
 // Convenience Constructors
   + (float)scrollerWidth;
   + (float)scrollerWidthForControlSize:(NSControlSize)controlSize;
 // Accessor Methods
   - (void)setFloatValue:(float)aFloat knobProportion:(float)percent;
   - (void)setControlTint:(NSControlTint)controlTint;
   - (NSControlTint)controlTint;
   - (void)setArrowsPosition:(NSScrollArrowPosition)where;
   - (NSScrollArrowPosition)arrowsPosition;
   - (void)setControlSize:(NSControlSize)controlSize;
   - (NSControlSize)controlSize;
 // Instance Methods
   - (void)checkSpaceForParts;
   - (void)drawArrow:(NSScrollerArrow)whichArrow highlight:(BOOL)flag;
   - (void)drawKnob;
   - (void)drawParts;
   - (void)highlight:(BOOL)flag;
   - (NSScrollerPart)hitPart;
   - (float)knobProportion;
   - (NSRect)rectForPart:(NSScrollerPart)partCode;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (NSScrollerPart)**testPart**:(NSPoint)*thePoint*; |
| - (void)**trackKnob**:(NSEvent *)*theEvent*; |
| - (void)**trackScrollButtons**:(NSEvent *)*theEvent*; |
| - (NSUsableScrollerParts)**usableParts**; |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSScrollView* *Mac OS X 10.0*

This subclass of `NSView` allows a user to view a portion of a large document view using scrollbars. Clippi by the subclass `NSClipView` . Horizontal and vertical scrollbars are instances of the class `NSScroller` . R class `NSRulerView` , can be displayed in the left and top edges of the scrollview.

```
@interface NSScrollView : NSView
 // Accessor Methods
   - (void)setBackgroundColor:(NSColor *)color;
   - (NSColor *)backgroundColor;
   - (void)setPageScroll:(float)value;
   - (float)pageScroll;
   - (void)setHorizontalRulerView:(NSRulerView *)ruler;
   - (NSRulerView *)horizontalRulerView;
   - (void)setHasVerticalRuler:(BOOL)flag;
   - (BOOL)hasVerticalRuler;
   - (void)setHasHorizontalRuler:(BOOL)flag;
   - (BOOL)hasHorizontalRuler;
   - (void)setHorizontalPageScroll:(float)value;
   - (float)horizontalPageScroll;
   - (void)setBorderType:(NSBorderType)aType;
   - (NSBorderType)borderType;
   - (void)setHorizontalLineScroll:(float)value;
   - (float)horizontalLineScroll;
   - (void)setRulersVisible:(BOOL)flag;
   - (BOOL)rulersVisible;
   - (void)setScrollsDynamically:(BOOL)flag;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)scrollsDynamically;
- (void)setHasVerticalScroller:(BOOL)flag;
- (BOOL)hasVerticalScroller;
- (void)setHasHorizontalScroller:(BOOL)flag;
- (BOOL)hasHorizontalScroller;
- (void)setLineScroll:(float)value;
- (float)lineScroll;
- (void)setHorizontalScroller:(NSScroller *)anObject;
- (NSScroller *)horizontalScroller;
- (void)setDocumentCursor:(NSCursor *)anObj;
- (NSCursor *)documentCursor;
- (void)setDocumentView:(NSView *)aView;
- (id)documentView;
- (void)setContentView:(NSClipView *)contentView;
- (NSClipView *)contentView;
- (void)setVerticalScroller:(NSScroller *)anObject;
- (NSScroller *)verticalScroller;
- (void)setVerticalRulerView:(NSRulerView *)ruler;
- (NSRulerView *)verticalRulerView;
- (void)setVerticalLineScroll:(float)value;
- (float)verticalLineScroll;
- (void)setVerticalPageScroll:(float)value;
- (float)verticalPageScroll;
- (void)setDrawsBackground:(BOOL)flag;
- (BOOL)drawsBackground;
// Class Methods
+ (NSSize)contentSizeForFrameSize:(NSSize)fSize hasHorizontalScroller:(BOOL)hFlag ha
    borderType:(NSBorderType)aType;
+ (NSSize)frameSizeForContentSize:(NSSize)cSize hasHorizontalScroller:(BOOL)hFlag ha
    borderType:(NSBorderType)aType;
+ (Class)rulerViewClass;
+ (void)setRulerViewClass:(Class)rulerViewClass;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Instance Methods
- (void)reflectScrolledClipView:(NSClipView *)cView;
- (void)scrollWheel:(NSEvent *)theEvent;
- (void)tile;
- (NSSize)contentSize;
- (NSRect)documentVisibleRect;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSSecureTextField* *Mac OS X 10.0*

`NSSecureTextField` is a subclass of `NSTextField` that adds the behavior of displaying the contents of the text field as a string of dots so that the value of the string is kept hidden. This is the control a developer would use for password entry fields, or any other text field that displays sensitive values that may need to be hidden.

```
@interface NSSecureTextField : NSTextField
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSSecureTextFieldCell* *Mac OS X 10.0*

This class is the cell associated with the `NSSecureTextField` control. `NSSecureTextFieldCell` is responsible for the appearance of the secure text field control, as well as any mouse event handling that occurs over the cell.

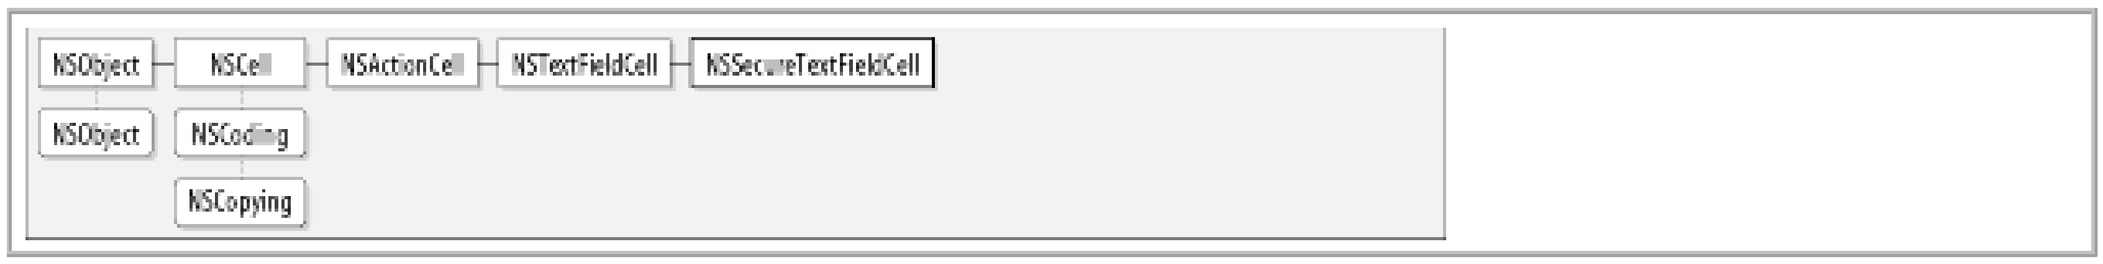


```
@interface NSSecureTextFieldCell : NSTextFieldCell
 // Accessor Methods
   - (void)setEchosBullets:(BOOL)flag;
   - (BOOL)echosBullets;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSSimpleHorizontalTypesetter* *Mac OS X 10.0*

This concrete subclass of `NSTypesetter` supports left-to-right line layout. This class handles such things and line-breaking. For more information about Cocoa's text layout engine, see Chapter 5.

```
@interface NSSimpleHorizontalTypesetter : NSTypesetter
 // Class Methods
   + (id)sharedInstance;
 // Instance Methods
   - (void)willSetLineFragmentRect:(NSRect *)aRect forGlyphRange:(NSRange)aRange usedRe
   - (NSTypesetterGlyphInfo *)baseOfTypesetterGlyphInfo;
   - (void)breakLineAtIndex:(unsigned)location;
   - (unsigned)capacityOfTypesetterGlyphInfo;
   - (void)clearAttributesCache;
   - (void)clearGlyphCache;
   - (NSTextContainer *)currentContainer;
   - (NSLayoutManager *)currentLayoutManager;
   - (NSParagraphStyle *)currentParagraphStyle;
   - (NSTextStorage *)currentTextStorage;
   - (void)fillAttributesCache;
   - (unsigned)firstGlyphIndexOfCurrentLineFragment;
   - (void)fullJustifyLineAtGlyphIndex:(unsigned)glyphIndexForLineBreak;
   - (unsigned)glyphIndexToBreakLineByHyphenatingWordAtIndex:(unsigned)charIndex;
   - (unsigned)glyphIndexToBreakLineByWordWrappingAtIndex:(unsigned)charIndex;
   - (unsigned)growGlyphCaches:(unsigned)desiredCapacity fillGlyphInfo:(BOOL)fillGlyph
   - (void)insertGlyph:(NSGlyph)glyph atGlyphIndex:(unsigned)glyphIndex characterIndex:
   - (NSLayoutStatus)layoutControlGlyphForLineFragment:(NSRect)lineFrag;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSLayoutStatus)layoutControlGlyphForLineFragment:(NSRect)lineFrag;
```

```
- (NSLayoutStatus)layoutGlyphsInHorizontalLineFragment:(NSRect *)lineFragmentRect ba
```

```
- (void)layoutGlyphsInLayoutManager:(NSLayoutManager *)layoutManager
    startingAtGlyphIndex:(unsigned)startGlyphIndex maxNumberOfLineFragments:(unsigi
    nextGlyphIndex:(unsigned *)nextGlyph;
```

```
- (void)layoutTab;
```

```
- (void)layoutTab;
```

```
- (unsigned)sizeOfTypesetterGlyphInfo;
```

```
- (void)typesetterLaidOneGlyph:(NSTypesetterGlyphInfo *)gl;
```

```
- (void)updateCurGlyphOffset;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSSlider — Mac OS X 10.0

This subclass of `NSControl` represents a slider control where a user manipulates a knob to select from a range of values: for example, the control in the Volume menu item. The cell for `NSSlider` is `NSSliderCell`.

```
@interface NSSlider : NSControl
 // Accessor Methods
   - (void)setTitleFont:(NSFont *)fontObj;
   - (NSFont *)titleFont;
   - (void)setMinValue:(double)aDouble;
   - (double)minValue;
   - (void)setMaxValue:(double)aDouble;
   - (double)maxValue;
   - (void)setAltIncrementValue:(double)incValue;
   - (double)altIncrementValue;
   - (void)setTitleCell:(NSCell *)aCell;
   - (id)titleCell;
   - (void)setTitleColor:(NSColor *)newColor;
   - (NSColor *)titleColor;
   - (void)setTitle:(NSString *)aString;
   - (NSString *)title;
   - (void)setKnobThickness:(float)aFloat;
   - (float)knobThickness;
   - (void)setImage:(NSImage *)backgroundImage;
   - (NSImage *)image;
 // Instance Methods
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)acceptsFirstMouse:(NSEvent *)theEvent;
```

```
- (int)isVertical;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSSliderCell — Mac OS X 10.0

This is the `NSCell` subclass for the `NSSlider` control class, which is an interface element that allows the user to select a value from a range of values by sliding a knob along a track.

```
@interface NSSliderCell : NSActionCell
 // Accessor Methods
   - (void)setTitleColor:(NSColor *)newColor;
   - (NSColor *)titleColor;
   - (void)setMinValue:(double)aDouble;
   - (double)minValue;
   - (void)setMaxValue:(double)aDouble;
   - (double)maxValue;
   - (void)setAltIncrementValue:(double)incValue;
   - (double)altIncrementValue;
   - (void)setNumberOfTickMarks:(int)count;
   - (int)numberOfTickMarks;
   - (void)setTickMarkPosition:(NSTickMarkPosition)position;
   - (NSTickMarkPosition)tickMarkPosition;
   - (void)setKnobThickness:(float)aFloat;
   - (float)knobThickness;
   - (void)setTitleFont:(NSFont *)fontObj;
   - (NSFont *)titleFont;
   - (void)setAllowsTickMarkValuesOnly:(BOOL)yorn;
   - (BOOL)allowsTickMarkValuesOnly;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setTitle:(NSString *)aString;
- (NSString *)title;
- (void)setTitleCell:(NSCell *)aCell;
- (id)titleCell;
// Class Methods
+ (BOOL)prefersTrackingUntilMouseUp;
// Instance Methods
- (double)closestTickMarkValueToValue:(double)value;
- (void)drawBarInside:(NSRect)aRect flipped:(BOOL)flipped;
- (void)drawKnob;
- (void)drawKnob:(NSRect)knobRect;
- (int)indexOfTickMarkAtPoint:(NSPoint)point;
- (int)isVertical;
- (NSRect)knobRectFlipped:(BOOL)flipped;
- (NSRect)rectOfTickMarkAtIndex:(int)index;
- (double)tickMarkValueAtIndex:(int)index;
- (NSRect)trackRect;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSSound* *Mac OS X 10.0*

This class is a simple interface for playing AIFF, WAV, and NeXTsound files. An instance of this class is initialized from a file using the method`initWithContentsOfFile:byReference:`. The `byReference:` argument relates to how the sound object should be archived. If this argument is`YES`, only the name of the sound file will be archived; otherwise, the object data will be archived. There are four methods for controlling playback of the sound:`play`, `pause`, `resume`, and `stop`. Instances of `NSSound` may take a delegate object, which will be notified when the sound has finished playing.

```
@interface NSSound : NSObject <NSCoding, NSCopying>
 // Convenience Constructors
   + (id)soundNamed:(NSString *)name;
   + (NSArray *)soundUnfilteredFileTypes;
   + (NSArray *)soundUnfilteredPasteboardTypes;
 // Initializers
   - (id)initWithContentsOfFile:(NSString *)path byReference:(BOOL)byRef;
   - (id)initWithContentsOfURL:(NSURL *)url byReference:(BOOL)byRef;
   - (id)initWithData:(NSData *)data;
   - (id)initWithPasteboard:(NSPasteboard *)pasteboard;
 // Accessor Methods
   - (void)setDelegate:(id)aDelegate;
   - (id)delegate;
   - (BOOL)setName:(NSString *)string;
   - (NSString *)name;
 // Class Methods
   + (BOOL)canInitWithPasteboard:(NSPasteboard *)pasteboard;
 // Instance Methods
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isPlaying;
- (BOOL)pause;
- (BOOL)play;
- (BOOL)resume;
- (BOOL)stop;
- (void)writeToPasteboard:(NSPasteboard *)pasteboard;
// Methods Implementing NSCoding
- (void)encodeWithCoder:(NSCoder *)aCoder;
- (id)initWithCoder:(NSCoder *)aDecoder;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implemented by the Delegate
- (void)sound:(NSSound *)sound didFinishPlaying:(BOOL)aBool;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSSpellChecker* *Mac OS X 10.0*

This class provides an interface to Cocoa's spellchecking service. A shared instance of `NSSpellChecker` is returned using the class method `sharedSpellChecker` . To check the spelling of a length of text, invoke method `checkSpellingOfString:startingAt` :, which takes the string to check and the offset in the st where the spellcheck should commence. This method will return an `NSRange` indicating the location of the misspelled word. Clients then update the contents of the spellchecking panel to notify the user of the dis the misspelled word using the method `updateSpellingPanelWithMisspelledWord` :; passing an empty here will cause the spellchecking process to terminate. Support for spellchecking services is built into th text handling classes. If you wish to implement support for spellchecking into a class of your own, then implement the methods declared in the `NSChangeSpelling` and `NSIgnoreMisspelledWords` protocols; se protocol descriptions in Chapter 16 for more information.

```
@interface NSSpellChecker : NSObject
 // Accessor Methods
   - (void)setIgnoredWords:(NSArray *)words inSpellDocumentWithTag:(int)tag;
   - (void)setWordFieldStringValue:(NSString *)aString;
   - (BOOL)setLanguage:(NSString *)language;
   - (NSString *)language;
   - (void)setAccessoryView:(NSView *)aView;
   - (NSView *)accessoryView;
 // Class Methods
   + (NSSpellChecker *)sharedSpellChecker;
   + (BOOL)sharedSpellCheckerExists;
   + (int)uniqueSpellDocumentTag;
 // Instance Methods
   - (NSRange)checkSpellingOfString:(NSString *)stringToCheck startingAt:(int)starting
   - (int)countWordsInString:(NSString *)stringToCount language:(NSString *)language;
   - (NSRange)checkSpellingOfString:(NSString *)stringToCheck startingAt:(int)starting
       language:(NSString *)language wrap:(BOOL)wrapFlag inSpellDocumentWithTag:(int)
       wordCount:(int *)wordCount;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)closeSpellDocumentWithTag:(int)tag;
- (NSArray *)guessesForWord:(NSString *)word;
- (void)ignoreWord:(NSString *)wordToIgnore inSpellDocumentWithTag:(int)tag;
- (NSArray *)ignoredWordsInSpellDocumentWithTag:(int)tag;
- (NSPanel *)spellingPanel;
- (void)updateSpellingPanelWithMisspelledWord:(NSString *)word;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSSplitView* *Mac OS X 10.0*

This NSView subclass displays two subviews either stacked vertically, or side-by-side horizontally, separa
resize the subviews within the split view.

```
@interface NSSplitView : NSView
 // Accessor Methods
   - (void)setIsPaneSplitter:(BOOL)flag;
   - (BOOL)isPaneSplitter;
   - (void)setDelegate:(id)anObject;
   - (id)delegate;
   - (void)setVertical:(BOOL)flag;
 // Instance Methods
   - (float)dividerThickness;
   - (BOOL)isVertical;
   - (void)adjustSubviews;
   - (void)drawDividerInRect:(NSRect)aRect;
   - (BOOL)isSubviewCollapsed:(NSView *)subview;
// Methods Implemented by the Delegate
   - (BOOL)splitView:(NSSplitView *)sender canCollapseSubview:(NSView *)subview;
   - (float)splitView:(NSSplitView *)sender constrainMaxCoordinate:(float)proposedCoor
   - (float)splitView:(NSSplitView *)sender constrainMinCoordinate:(float)proposedCoor
   - (void)splitView:(NSSplitView *)sender resizeSubviewsWithOldSize:(NSSize)oldSize;
   - (float)splitView:(NSSplitView *)splitView constrainSplitPosition:(float)proposedP
   - (void)splitViewDidResizeSubviews:(NSNotification *)notification;
   - (void)splitViewWillResizeSubviews:(NSNotification *)notification;
// Notifications
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
NSSplitViewDidResizeSubviewsNotification;
```

```
NSSplitViewWillResizeSubviewsNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSStatusBar* *Mac OS X 10.0*

This class defines the interface for the system status bar that appears on the right end of the main menu bar. The individual items in the status bar are instances of the class `NSStatusItem`. Clients obtain the shared system status bar instance using the class method `systemStatusBar`. Status items are created and added to a status bar by invoking the method `statusItemWithLength:`, and applications can remove status items that they have created by invoking `removeStatusItem:`.

```
@interface NSStatusBar : NSObject
 // Class Methods
   + (NSStatusBar*)systemStatusBar;
 // Instance Methods
   - (BOOL) isVertical;
   - (float) thickness;
   - (void)removeStatusItem:(NSStatusItem*)item;
   - (NSStatusItem*)statusItemWithLength:(float)length;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSStatusItem — Mac OS X 10.0

This class represents the objects that appear in the system status bar at the right end of the main menu bar in every application. This class provides methods to access and manage the characteristics of a status item, such as its title, icon, length, tool tip, target, action, and more. To prevent cluttering of the status bar, status items should be used sparingly and only when no better alternative exists.

```
@interface NSStatusItem : NSObject
 // Instance Methods
   - (SEL)action;
   - (NSAttributedString*)attributedTitle;
   - (BOOL)highlightMode;
   - (NSImage*)image;
   - (BOOL)isEnabled;
   - (float)length;
   - (NSMenu*)menu;
   - (void)sendActionOn:(int)mask;
   - (void)setAction:(SEL)action;
   - (void)setAttributedTitle:(NSAttributedString*)title;
   - (void)setEnabled:(BOOL)enabled;
   - (void)setHighlightMode:(BOOL)highlightMode;
   - (void)setImage:(NSImage*)image;
   - (void)setLength:(float)length;
   - (void)setMenu:(NSMenu*)menu;
   - (void)setTarget:(id)target;
   - (void)setTitle:(NSString*)title;
   - (void)setToolTip:(NSString*)toolTip;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| - (void)**setView**:(NSView*)*view*; |
| - (NSStatusBar*)**statusBar**; |
| - (id)**target**; |
| - (NSString*)**title**; |
| - (NSString*)**toolTip**; |
| - (NSView*)**view**; |

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSStepper* *Mac OS X 10.0*

This is a subclass of `NSControl` that allows users to change an incremental value by clicking on portions of the control that either increment or decrement the value of the control by some predetermined amount.

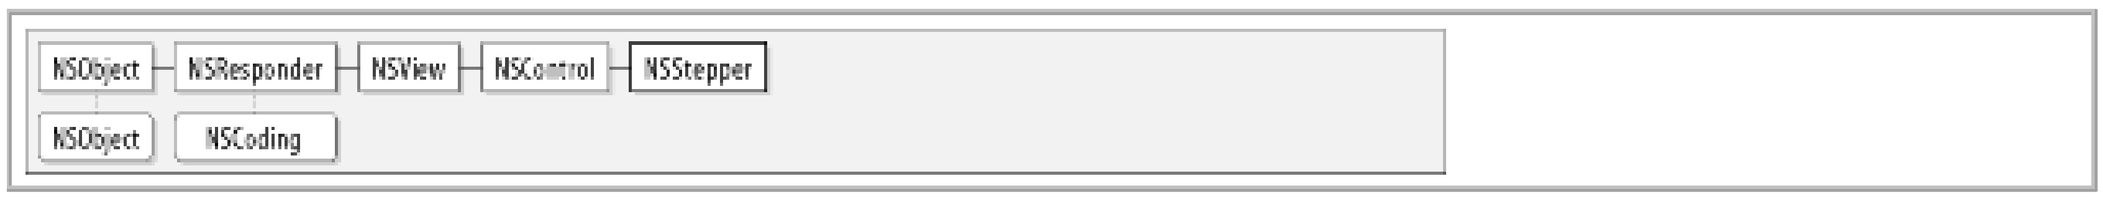


```
@interface NSStepper : NSControl
 // Accessor Methods
   - (void)setMaxValue:(double)maxValue;
   - (double)maxValue;
   - (void)setMinValue:(double)minValue;
   - (double)minValue;
   - (void)setAutorepeat:(BOOL)autorepeat;
   - (BOOL)autorepeat;
   - (void)setIncrement:(double)increment;
   - (double)increment;
   - (void)setValueWraps:(BOOL)valueWraps;
   - (BOOL)valueWraps;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSStepperCell* *Mac OS X 10.0*

This class is the associated cell for the `NSStepper` control. As an `NSCell` subclass, this `NSStepperCell` is responsible for the appearence and event handling of an `NSStepper` control.

```
@interface NSStepperCell : NSActionCell
 // Accessor Methods
   - (void)setMaxValue:(double)maxValue;
   - (double)maxValue;
   - (void)setMinValue:(double)minValue;
   - (double)minValue;
   - (void)setAutorepeat:(BOOL)autorepeat;
   - (BOOL)autorepeat;
   - (void)setIncrement:(double)increment;
   - (double)increment;
   - (void)setValueWraps:(BOOL)valueWraps;
   - (BOOL)valueWraps;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSTableColumn* *Mac OS X 10.0*

This class represents a column in an `NSTableView`. In particular, `NSTableColumn` stores display attributes of the table column, such as the display width, whether the table column may be resized, and whether it is editable.

Every column in a table has a unique identifier, which is accessed with the methods `setIdentifier:` and `identifier`.

Associated with a table column object are two `NSCell`s: the header cell and the data cell. The header cell is responsible for the appearance of the table column header. To access the table column's header cell, use the methods `setHeaderCell:` and `headerCell`.

The data cell of a table column determines how data in the column is displayed. By default the data cell is an instance of `NSTextFieldCell`, which provides for displayed and editing text data. However, you could change the data cell of a table column to display controls other than a text field. For example, if you wanted to display Boolean information in your table column, you could set the data cell to an instance of `NSButtonCell` that is configured as a checkbox. If you wanted a column of slider controls, you could set the data cell of the column to an instance of `NSSliderCell`. To access the data cell use the methods `setDataCell:` and `dataCell`.

```
@interface NSTableColumn : NSObject
 // Initializers
   - (id)initWithIdentifier:(id)identifier;
 // Accessor Methods
   - (void)setTableView:(NSTableView *)tableView;
   - (NSTableView *)tableView;
   - (void)setIdentifier:(id)identifier;
   - (id)identifier;
   - (void)setResizable:(BOOL)flag;
   - (void)setMinWidth:(float)minWidth;
   - (float)minWidth;
   - (void)setHeaderCell:(NSCell *)cell;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id)headerCell;
- (void)setDataCell:(NSCell *)cell;
- (id)dataCell;
- (void)setMaxWidth:(float)maxWidth;
- (float)maxWidth;
- (void)setWidth:(float)width;
- (float)width;
- (void)setEditable:(BOOL)flag;
// Instance Methods
- (id)dataCellForRow:(int)row;
- (BOOL)isEditable;
- (BOOL)isResizable;
- (void)sizeToFit;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSTableHeaderCell — Mac OS X 10.0

`NSTableHeaderCell` is used by `NSTableHeaderView` to draw the contents of table column headers. This class may be subclassed to customize the appearence of the column headers in a table view.

```
@interface NSTableHeaderCell : NSTextFieldCell
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSTableHeaderView — Mac OS X 10.0

This class is responsible for managing column headers in a table view. `NSTableView` objects use `NSTableHeaderView` to draw the headers, including any labeling and highlighting. `NSTableHeaderView` relies on `NSTableHeaderCell` objects to draw the individual header labels.

```
@interface NSTableHeaderView : NSView
 // Accessor Methods
   - (void)setTableView:(NSTableView *)tableView;
   - (NSTableView *)tableView;
 // Instance Methods
   - (int)columnAtPoint:(NSPoint)point;
   - (int)draggedColumn;
   - (float)draggedDistance;
   - (NSRect)headerRectOfColumn:(int)column;
   - (int)resizedColumn;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSTableView* *Mac OS X 10.0*

This subclass of `NSView` organizes information into rows and columns. The information displayed in the t that serves as the table view's data source object; data source objects must implement a minimum set `NSTableDataSource` informal protocol. Instances of `NSTableView` are composite objects that manage `NS` each column in a table), and `NSTableHeaderView` objects (to draw the headers over the table columns).

```
@interface NSTableView : NSControl
 // Accessor Methods
   - (void)setRowHeight:(float)rowHeight;
   - (float)rowHeight;
   - (void)setDelegate:(id)delegate;
   - (id)delegate;
   - (void)setHeaderView:(NSTableHeaderView *)headerView;
   - (NSTableHeaderView *)headerView;
   - (void)setCornerView:(NSView *)cornerView;
   - (NSView *)cornerView;
   - (void)setAllowsColumnReordering:(BOOL)flag;
   - (BOOL)allowsColumnReordering;
   - (void)setAllowsColumnResizing:(BOOL)flag;
   - (BOOL)allowsColumnResizing;
   - (void)setAutoresizesAllColumnsToFit:(BOOL)flag;
   - (BOOL)autoresizesAllColumnsToFit;
   - (void)setIntercellSpacing:(NSSize)aSize;
   - (NSSize)intercellSpacing;
   - (void)setBackgroundColor:(NSColor *)color;
   - (NSColor *)backgroundColor;
   - (void)setGridColor:(NSColor *)color;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSColor *)gridColor;
- (void)setIndicatorImage:(NSImage *)anImage  inTableColumn:(NSTableColumn *)tc;
- (void)setAllowsColumnSelection:(BOOL)flag;
- (BOOL)allowsColumnSelection;
- (void)setAutosaveTableColumns:(BOOL)save;
- (BOOL)autosaveTableColumns;
- (void)setAllowsEmptySelection:(BOOL)flag;
- (BOOL)allowsEmptySelection;
- (void)setAllowsMultipleSelection:(BOOL)flag;
- (BOOL)allowsMultipleSelection;
- (void)setDropRow:(int)row dropOperation:(NSTableViewDropOperation)op;
- (void)setDataSource:(id)aSource;
- (id)dataSource;
- (void)setAutosaveName:(NSString *)name;
- (NSString *)autosaveName;
- (void)setDoubleAction:(SEL)aSelector;
- (SEL)doubleAction;
- (void)setHighlightedTableColumn:(NSTableColumn *)tc;
- (NSTableColumn *)highlightedTableColumn;
- (void)setDrawsGrid:(BOOL)flag;
- (BOOL)drawsGrid;
- (void)setVerticalMotionCanBeginDrag:(BOOL)flag;
- (BOOL)verticalMotionCanBeginDrag;
// Instance Methods
- (void)highlightSelectionInClipRect:(NSRect)rect;
- (void)deselectRow:(int)row;
- (void)deselectAll:(id)sender;
- (void)deselectColumn:(int)column;
- (void)addTableColumn:(NSTableColumn *)column;
- (NSImage*)dragImageForRows:(NSArray*)dragRows event:(NSEvent*)dragEvent
    dragImageOffset:(NSPointPointer)dragImageOffset;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSRect)frameOfCellAtColumn:(int)column row:(int)row;
- (int)clickedColumn;
- (int)clickedRow;
- (NSImage *)indicatorImageInTableColumn:(NSTableColumn *)tc;
- (BOOL)isColumnSelected:(int)row;
- (BOOL)isRowSelected:(int)row;
- (void)moveColumn:(int)column toColumn:(int)newIndex;
- (void)noteNumberOfRowsChanged;
- (int)numberOfColumns;
- (int)numberOfRows;
- (int)numberOfSelectedColumns;
- (int)numberOfSelectedRows;
- (void)reloadData;
- (void)removeTableColumn:(NSTableColumn *)column;
- (int)rowAtPoint:(NSPoint)point;
- (NSRange)rowsInRect:(NSRect)rect;
- (void)scrollColumnToVisible:(int)column;
- (void)scrollRowToVisible:(int)row;
- (void)selectAll:(id)sender;
- (void)selectColumn:(int)column byExtendingSelection:(BOOL)extend;
- (void)selectRow:(int)row byExtendingSelection:(BOOL)extend;
- (int)selectedColumn;
- (NSEnumerator *)selectedColumnEnumerator;
- (int)selectedRow;
- (NSEnumerator *)selectedRowEnumerator;
- (void)sizeLastColumnToFit;
- (NSTableColumn *)tableColumnWithIdentifier:(id)identifier;
- (NSArray *)tableColumns;
- (void)tile;
- (int)columnAtPoint:(NSPoint)point;
- (int)columnWithIdentifier:(id)identifier;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSRange)columnsInRect:(NSRect)rect;
- (void)drawGridInClipRect:(NSRect)rect;
- (void)drawRow:(int)row clipRect:(NSRect)rect;
- (void)editColumn:(int)column row:(int)row withEvent:(NSEvent *)theEvent select:(B
- (int)editedColumn;
- (int)editedRow;
- (NSRect)rectOfColumn:(int)column;
- (NSRect)rectOfRow:(int)row;
- (void)textDidBeginEditing:(NSNotification *)notification;
- (void)textDidChange:(NSNotification *)notification;
- (void)textDidEndEditing:(NSNotification *)notification;
- (BOOL)textShouldBeginEditing:(NSText *)textObject;
- (BOOL)textShouldEndEditing:(NSText *)textObject;
// Methods Implemented by the Delegate
- (void)tableView:(NSTableView*)tableView didClickTableColumn:(NSTableColumn *)tabl
- (void)tableView:(NSTableView*)tableView didDragTableColumn:(NSTableColumn *)table
- (void)tableView:(NSTableView*)tableView mouseDownInHeaderOfTableColumn:(NSTableCo
- (BOOL)selectionShouldChangeInTableView:(NSTableView *)aTableView;
- (BOOL)tableView:(NSTableView *)tableView shouldEditTableColumn:(NSTableColumn *)ta
- (BOOL)tableView:(NSTableView *)tableView shouldSelectRow:(int)row;
- (BOOL)tableView:(NSTableView *)tableView shouldSelectTableColumn:(NSTableColumn *
- (void)tableView:(NSTableView *)tableView willDisplayCell:(id)cell
    forTableColumn:(NSTableColumn *)tableColumn row:(int)row;
- (void)tableViewColumnDidMove:(NSNotification *)notification;
- (void)tableViewColumnDidResize:(NSNotification *)notification;
- (void)tableViewSelectionDidChange:(NSNotification *)notification;
- (void)tableViewSelectionIsChanging:(NSNotification *)notification;
// Notifications
NSTableViewSelectionDidChangeNotification;
NSTableViewSelectionIsChangingNotification;
```

Subclasses

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSOutlineView

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# *NSTabView* *Mac OS X 10.0*

This `NSView` subclass provides a way to display pages of views that can be selected by tabs identifying e
The pages of a tab view are actually instances of the class `NSTabViewItem` , which is a small class that k
tab view, page view, and related information to presenting it in the tab view.

```
@interface NSTabView : NSView
 // Accessor Methods
   - (void)setAllowsTruncatedLabels:(BOOL)allowTruncatedLabels;
   - (BOOL)allowsTruncatedLabels;
   - (void)setDelegate:(id)anObject;
   - (id)delegate;
   - (void)setTabViewType:(NSTabViewType)tabViewType;
   - (NSTabViewType)tabViewType;
   - (void)setFont:(NSFont *)font;
   - (NSFont *)font;
   - (void)setControlSize:(NSControlSize)controlSize;
   - (NSControlSize)controlSize;
   - (void)setDrawsBackground:(BOOL)flag;
   - (BOOL)drawsBackground;
   - (void)setControlTint:(NSControlTint)controlTint;
   - (NSControlTint)controlTint;
 // Instance Methods
   - (void)addTabViewItem:(NSTabViewItem *)tabViewItem;
   - (int)indexOfTabViewItemWithIdentifier:(id)identifier;
   - (int)indexOfTabViewItem:(NSTabViewItem *)tabViewItem;
   - (void)insertTabViewItem:(NSTabViewItem *)tabViewItem atIndex:(int)index;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSSize)minimumSize;
- (int)numberOfTabViewItems;
- (void)removeTabViewItem:(NSTabViewItem *)tabViewItem;
- (void)selectFirstTabViewItem:(id)sender;
- (void)selectLastTabViewItem:(id)sender;
- (void)selectNextTabViewItem:(id)sender;
- (void)selectPreviousTabViewItem:(id)sender;
- (void)selectTabViewItem:(NSTabViewItem *)tabViewItem;
- (void)selectTabViewItemAtIndex:(int)index;
- (void)selectTabViewItemWithIdentifier:(id)identifier;
- (NSTabViewItem *)selectedTabViewItem;
- (NSTabViewItem *)tabViewItemAtIndex:(int)index;
- (NSTabViewItem *)tabViewItemAtPoint:(NSPoint)point;
- (NSArray *)tabViewItems;
- (void)takeSelectedTabViewItemFromSender:(id)sender;
- (NSRect)contentRect;
// Methods Implemented by the Delegate
- (void)tabView:(NSTabView *)tabView didSelectTabViewItem:(NSTabViewItem *)tabViewI
- (BOOL)tabView:(NSTabView *)tabView shouldSelectTabViewItem:(NSTabViewItem *)tabVie
- (void)tabView:(NSTabView *)tabView willSelectTabViewItem:(NSTabViewItem *)tabView
- (void)tabViewDidChangeNumberOfTabViewItems:(NSTabView *)TabView;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSTabViewItem — Mac OS X 10.0

This class represents a single tabbed pane within a tab view object. `NSTabView` objects maintain an array of `NSTabViewItem` objects for each of its tabs. Associated with each tab view item is an identifier, a label that is drawn in the tab itself, and a view that contains the contents of the tab view item. For most simple uses of tab views, you won't have to interact with the `NSTabView` or `NSTabViewItem` APIs directly, as Interface Builder is capable of fully configuring a tab view.

```
@interface NSTabViewItem : NSObject <NSCoding>
 // Initializers
   - (id)initWithIdentifier:(id)identifier;
   - (id)initialFirstResponder;
 // Accessor Methods
   - (void)setColor:(NSColor *)color;
   - (NSColor *)color;
   - (void)setLabel:(NSString *)label;
   - (NSString *)label;
   - (void)setIdentifier:(id)identifier;
   - (id)identifier;
   - (void)setInitialFirstResponder:(NSView *)view;
   - (void)setView:(NSView *)view;
   - (id)view;
 // Instance Methods
   - (NSSize)sizeOfLabel:(BOOL)computeMin;
   - (NSTabState)tabState;
   - (NSTabView *)tabView;
 // Methods Implementing NSCoding
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)encodeWithCoder:(NSCoder *)aCoder;
```

```
- (id)initWithCoder:(NSCoder *)aDecoder;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSText

Mac OS X 10.0

NSText inherits from NSView and is the parent class of NSTextView. It declares the most general interface for objects that manage and display text; however, clients generally interact with NSTextView objects rather than instances of NSText itself.

```
@interface NSText : NSView <NSChangeSpelling, NSIgnoreMisspelledWords>
 // Accessor Methods
   - (void)setHorizontallyResizable:(BOOL)flag;
   - (void)setString:(NSString *)string;
   - (NSString *)string;
   - (void)setDelegate:(id)anObject;
   - (id)delegate;
   - (void)setSelectedRange:(NSRange)range;
   - (NSRange)selectedRange;
   - (void)setSelectable:(BOOL)flag;
   - (void)setMinSize:(NSSize)newMinSize;
   - (NSSize)minSize;
   - (void)setRichText:(BOOL)flag;
   - (void)setImportsGraphics:(BOOL)flag;
   - (BOOL)importsGraphics;
   - (void)setBackgroundColor:(NSColor *)color;
   - (NSColor *)backgroundColor;
   - (void)setMaxSize:(NSSize)newMaxSize;
   - (NSSize)maxSize;
   - (void)setUsesFontPanel:(BOOL)flag;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)usesFontPanel;
- (void)setFieldEditor:(BOOL)flag;
- (void)setAlignment:(NSTextAlignment)mode;
- (NSTextAlignment)alignment;
- (void)setVerticallyResizable:(BOOL)flag;
- (void)setFont:(NSFont *)obj;
- (NSFont *)font;
- (void)setTextColor:(NSColor *)color;
- (NSColor *)textColor;
- (void)setDrawsBackground:(BOOL)flag;
- (BOOL)drawsBackground;
- (void)setTextColor:(NSColor *)color range:(NSRange)range;
- (void)setEditable:(BOOL)flag;
- (void)setFont:(NSFont *)font range:(NSRange)range;
// Instance Methods
- (NSData *)RTFDFromRange:(NSRange)range;
- (NSData *)RTFFromRange:(NSRange)range;
- (void)alignLeft:(id)sender;
- (void)alignRight:(id)sender;
- (void)changeFont:(id)sender;
- (void)cut:(id)sender;
- (void)delete:(id)sender;
- (BOOL)isEditable;
- (void)alignCenter:(id)sender;
- (void)checkSpelling:(id)sender;
- (BOOL)isFieldEditor;
- (BOOL)isHorizontallyResizable;
- (BOOL)isRichText;
- (BOOL)isSelectable;
- (BOOL)isVerticallyResizable;
- (BOOL)readRTFDFromFile:(NSString *)path;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)replaceCharactersInRange:(NSRange)range withRTF:(NSData *)rtfData;
- (void)replaceCharactersInRange:(NSRange)range withRTFD:(NSData *)rtfdData;
- (void)replaceCharactersInRange:(NSRange)range withString:(NSString *)aString;
- (void)scrollRangeToVisible:(NSRange)range;
- (void)selectAll:(id)sender;
- (void)sizeToFit;
- (void)subscript:(id)sender;
- (void)superscript:(id)sender;
- (void)toggleRuler:(id)sender;
- (void)underline:(id)sender;
- (void)unscript:(id)sender;
- (void)copy:(id)sender;
- (void)copyFont:(id)sender;
- (void)copyRuler:(id)sender;
- (BOOL)isRulerVisible;
- (void)paste:(id)sender;
- (void)pasteFont:(id)sender;
- (void)pasteRuler:(id)sender;
- (void)showGuessPanel:(id)sender;
- (BOOL)writeRTFDToFile:(NSString *)path atomically:(BOOL)flag;
// Methods Implementing NSChangeSpelling
- (void)changeSpelling:(id)sender;
// Methods Implementing NSIgnoreMisspelledWords
- (void)ignoreSpelling:(id)sender;
// Methods Implemented by the Delegate
- (void)textDidBeginEditing:(NSNotification *)notification;
- (void)textDidChange:(NSNotification *)notification;
- (void)textDidEndEditing:(NSNotification *)notification;
- (BOOL)textShouldBeginEditing:(NSText *)textObject;
- (BOOL)textShouldEndEditing:(NSText *)textObject;
// Notifications
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| **NSTextDidBeginEditingNotification;** |
| **NSTextDidChangeNotification;** |

## Subclasses

NSTextView

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSTextAttachment — Mac OS X 10.0

Instances of this class serve as values in an attributed string for the attribute `NSAttachmentAttributeName`. Text attachment cells are associated with an `NSFileWrapper` object that may represent either a file or a URL.

```
@interface NSTextAttachment : NSObject <NSCoding>
 // Initializers
   - (id)initWithFileWrapper:(NSFileWrapper *)fileWrapper;
 // Accessor Methods
   - (void)setFileWrapper:(NSFileWrapper *)fileWrapper;
   - (NSFileWrapper *)fileWrapper;
   - (void)setAttachmentCell:(id <NSTextAttachmentCell>)cell;
   - (id <NSTextAttachmentCell>)attachmentCell;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSTextAttachmentCell* *Mac OS X 10.0*

This class implements the interface defined by the`NSTextAttachmentCell` protocol.

```
@interface NSTextAttachmentCell : NSCell <NSTextAttachmentCell>
 // Methods Implementing NSTextAttachmentCell
   - (void)drawWithFrame:(NSRect)cellFrame inView:(NSView *)controlView;
   - (BOOL)wantsToTrackMouse;
   - (void)highlight:(BOOL)flag withFrame:(NSRect)cellFrame  inView:(NSView *)controlV
   - (BOOL)trackMouse:(NSEvent *)theEvent inRect:(NSRect)cellFrame ofView:(NSView *)co
       untilMouseUp:(BOOL)flag;
   - (NSSize)cellSize;
   - (NSPoint)cellBaselineOffset;
   - (void)setAttachment:(NSTextAttachment *)anObject;
   - (NSTextAttachment *)attachment;
   - (void)drawWithFrame:(NSRect)cellFrame inView:(NSView *)controlView characterIndex
   - (void)drawWithFrame:(NSRect)cellFrame inView:(NSView *)controlView characterIndex
       layoutManager:(NSLayoutManager *)layoutManager;
   - (BOOL)wantsToTrackMouseForEvent:(NSEvent *)theEvent inRect:(NSRect)cellFrame ofVi
       atCharacterIndex:(unsigned)charIndex;
   - (BOOL)trackMouse:(NSEvent *)theEvent inRect:(NSRect)cellFrame ofView:(NSView *)co
       atCharacterIndex:(unsigned)charIndex untilMouseUp:(BOOL)flag;
   - (NSRect)cellFrameForTextContainer:(NSTextContainer *)textContainer proposedLineFra
       glyphPosition:(NSPoint)position characterIndex:(unsigned)charIndex;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSTextContainer* *Mac OS X 10.0*

This class is responsible for defining a region in which text will be laid out. The class `NSLayoutManager` m `NSTextContainer` objects and controls how text should fill these text containers. An `NSTextContainer` o of `NSTextView` that is responsible for putting the text up on screen. The default implementation of `NSTex` rectangular region of text; however, subclasses may be implemented to provide irregular shaped region View-Controller pattern, `NSTextStorage` is the model, `NSTextView` is the view, and `NSLayoutManager` an controllers between the data layer and the view layer. For more information on Cocoa's text layout engi

```
@interface NSTextContainer : NSObject <NSCoding>
 // Initializers
   - (id)initWithContainerSize:(NSSize)size;
 // Accessor Methods
   - (void)setLineFragmentPadding:(float)pad;
   - (float)lineFragmentPadding;
   - (void)setLayoutManager:(NSLayoutManager *)layoutManager;
   - (NSLayoutManager *)layoutManager;
   - (void)setHeightTracksTextView:(BOOL)flag;
   - (BOOL)heightTracksTextView;
   - (void)setWidthTracksTextView:(BOOL)flag;
   - (BOOL)widthTracksTextView;
   - (void)setTextView:(NSTextView *)textView;
   - (NSTextView *)textView;
   - (void)setContainerSize:(NSSize)size;
   - (NSSize)containerSize;
 // Instance Methods
   - (BOOL)containsPoint:(NSPoint)point;
   - (BOOL)isSimpleRectangularTextContainer;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSRect)lineFragmentRectForProposedRect:(NSRect)proposedRect
    sweepDirection:(NSLineSweepDirection)sweepDirection
    movementDirection:(NSLineMovementDirection)movementDirection remainingRect:(NSR
```

```
- (void)replaceLayoutManager:(NSLayoutManager *)newLayoutManager;
```

```
// Methods Implementing NSCoding
```

```
- (void)encodeWithCoder:(NSCoder *)aCoder;
```

```
- (id)initWithCoder:(NSCoder *)aDecoder;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSTextField* *Mac OS X 10.0*

This control class implements an editable text entry and display field. `NSTextField`'s companion cell class is `NSTextFieldCell`, a subclass of `NSActionCell`. Thus, `NSTextField` is capable of sending action messages to targets. By default, actions are sent to targets when the user completes editing by pressing the Return key.

Accessing the value of a text field is done using methods inherited from `NSControl` (indeed, these are the methods used to access the values of any control). To get the contents of the text field as a string, invoke `stringValue`. Alternatively, we may take the value as a number using `intValue`, `floatValue`, and `doubleValue`. Each of these methods has a corresponding `set...` method used to change the value displayed in the text field. See `NSControl` (earlier in this chapter) for more information.

```
@interface NSTextField : NSControl
 // Accessor Methods
   - (void)setDelegate:(id)anObject;
   - (id)delegate;
   - (void)setImportsGraphics:(BOOL)flag;
   - (BOOL)importsGraphics;
   - (void)setSelectable:(BOOL)flag;
   - (void)setBordered:(BOOL)flag;
   - (void)setBezeled:(BOOL)flag;
   - (void)setAllowsEditingTextAttributes:(BOOL)flag;
   - (BOOL)allowsEditingTextAttributes;
   - (void)setBackgroundColor:(NSColor *)color;
   - (NSColor *)backgroundColor;
   - (void)setBezelStyle:(NSTextFieldBezelStyle)style;
   - (NSTextFieldBezelStyle)bezelStyle;
   - (void)setDrawsBackground:(BOOL)flag;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)drawsBackground;
- (void)setTextColor:(NSColor *)color;
- (NSColor *)textColor;
- (void)setEditable:(BOOL)flag;
// Instance Methods
- (BOOL)acceptsFirstResponder;
- (BOOL)isBezeled;
- (BOOL)isBordered;
- (BOOL)isEditable;
- (BOOL)isSelectable;
- (void)selectText:(id)sender;
- (void)textDidBeginEditing:(NSNotification *)notification;
- (void)textDidChange:(NSNotification *)notification;
- (void)textDidEndEditing:(NSNotification *)notification;
- (BOOL)textShouldBeginEditing:(NSText *)textObject;
- (BOOL)textShouldEndEditing:(NSText *)textObject;
```

## Subclasses

NSComboBox, NSSecureTextField

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSTextFieldCell* *Mac OS X 10.0*

This is the `NSCell` subclass that `NSTextField` objects use to draw the contents of the control.

```
@interface NSTextFieldCell : NSActionCell
 // Accessor Methods
   - (NSText *)setUpFieldEditorAttributes:(NSText *)textObj;
   - (void)setBezelStyle:(NSTextFieldBezelStyle)style;
   - (NSTextFieldBezelStyle)bezelStyle;
   - (void)setBackgroundColor:(NSColor *)color;
   - (NSColor *)backgroundColor;
   - (void)setTextColor:(NSColor *)color;
   - (NSColor *)textColor;
   - (void)setDrawsBackground:(BOOL)flag;
   - (BOOL)drawsBackground;
```

### Subclasses

`NSComboBoxCell`, `NSSecureTextFieldCell`, `NSTableHeaderCell`

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSTextStorage* *Mac OS X 10.0*

This subclass of NSMutableAttributedString is the data model for Cocoa's text-handling system. NSTextStorage manages one or more NSLayoutManager s, which are responsible for determining how the text should be displayed. Two additional classes have an equally important role in the text-handling system, as does NSTextStorage : NSTextContainer and NSTextView . In terms of the Model-View-Controller pattern, NSTextStorage is the model, NSTextView is the view, and NSLayoutManager and NSTextContainer serve as controllers between the data layer and the view layer.

```
@interface NSTextStorage : NSMutableAttributedString
 // Accessor Methods
   - (void)setParagraphs:(NSArray *)paragraphs;
   - (NSArray *)paragraphs;
   - (void)setForegroundColor:(NSColor *)color;
   - (NSColor *)foregroundColor;
   - (void)setCharacters:(NSArray *)characters;
   - (NSArray *)characters;
   - (void)setAttributeRuns:(NSArray *)attributeRuns;
   - (NSArray *)attributeRuns;
   - (void)setDelegate:(id)delegate;
   - (id)delegate;
   - (void)setWords:(NSArray *)words;
   - (NSArray *)words;
   - (void)setFont:(NSFont *)font;
   - (NSFont *)font;
 // Instance Methods
   - (void)addLayoutManager:(NSLayoutManager *)obj;
   - (int)changeInLength;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)edited:(unsigned)editedMask range:(NSRange)range changeInLength:(int)delta;
- (unsigned)editedMask;
- (NSRange)editedRange;
- (void)ensureAttributesAreFixedInRange:(NSRange)range;
- (BOOL)fixesAttributesLazily;
- (void)invalidateAttributesInRange:(NSRange)range;
- (NSArray *)layoutManagers;
- (void)processEditing;
- (void)removeLayoutManager:(NSLayoutManager *)obj;
// Methods Implemented by the Delegate
- (void)textStorageDidProcessEditing:(NSNotification *)notification;
- (void)textStorageWillProcessEditing:(NSNotification *)notification;
// Notifications
NSTextStorageDidProcessEditingNotification;
NSTextStorageWillProcessEditingNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSTextTab — Mac OS X 10.0

This class is used by the class `NSParagraphStyle` to encapsulate information about a tab stop, such as alignment (left, right, center, etc.) and location of the stop relative to the alignment edge. To create a text tab object, use the method `initWithType:location:`. For more information on Cocoa's text handling infrastructure, see Chapter 5.

```
@interface NSTextTab : NSObject <NSCoding, NSCopying>
 // Initializers
   - (id)initWithType:(NSTextTabType)type location:(float)loc;
 // Instance Methods
   - (float)location;
   - (NSTextTabType)tabStopType;
 // Methods Implementing NSCoding
   - (void)encodeWithCoder:(NSCoder *)aCoder;
   - (id)initWithCoder:(NSCoder *)aDecoder;
 // Methods Implementing NSCopying
   - (id)copyWithZone:(NSZone *)zone;
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# *NSTextView* *Mac OS X 10.0*

This class is the frontend class to Cocoa's text-manipulation architecture. For most purposes, programm the text system; however, if more control is desired, than they may work with the individual component `NSTextStorage` , `NSTextContainer` , `NSLayoutManager` , and this class. In terms of the Model-View-Cor model, `NSTextView` is the view, and `NSLayoutManager` and `NSTextContainer` serve as controllers for the

```
@interface NSTextView : NSText <NSTextInput>
 // Initializers
   - (id)initWithFrame:(NSRect)frameRect;
   - (id)initWithFrame:(NSRect)frameRect textContainer:(NSTextContainer *)container;
 // Accessor Methods
   - (void)setImportsGraphics:(BOOL)flag;
   - (BOOL)importsGraphics;
   - (void)setBackgroundColor:(NSColor *)color;
   - (NSColor *)backgroundColor;
   - (void)setAcceptsGlyphInfo:(BOOL)flag;
   - (BOOL)acceptsGlyphInfo;
   - (void)setSelectable:(BOOL)flag;
   - (void)setUsesRuler:(BOOL)flag;
   - (BOOL)usesRuler;
   - (void)setRulerVisible:(BOOL)flag;
   - (void)setRichText:(BOOL)flag;
   - (void)setTypingAttributes:(NSDictionary *)attrs;
   - (NSDictionary *)typingAttributes;
   - (void)setMarkedTextAttributes:(NSDictionary *)attributeDictionary;
   - (NSDictionary *)markedTextAttributes;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setAlignment:(NSTextAlignment)alignment range:(NSRange)range;
- (void)setDelegate:(id)anObject;
- (id)delegate;
- (void)setSelectedRange:(NSRange)charRange;
- (void)setInsertionPointColor:(NSColor *)color;
- (NSColor *)insertionPointColor;
- (void)setAllowsUndo:(BOOL)flag;
- (BOOL)allowsUndo;
- (void)setSelectedTextAttributes:(NSDictionary *)attributeDictionary;
- (NSDictionary *)selectedTextAttributes;
- (void)setSelectionGranularity:(NSSelectionGranularity)granularity;
- (NSSelectionGranularity)selectionGranularity;
- (void)setFieldEditor:(BOOL)flag;
- (void)setUsesFontPanel:(BOOL)flag;
- (BOOL)usesFontPanel;
- (void)setSelectedRange:(NSRange)charRange affinity:(NSSelectionAffinity)affinity
    stillSelecting:(BOOL)stillSelectingFlag;
- (void)setSmartInsertDeleteEnabled:(BOOL)flag;
- (BOOL)smartInsertDeleteEnabled;
- (void)setNeedsDisplayInRect:(NSRect)rect avoidAdditionalLayout:(BOOL)flag;
- (void)setTextContainerInset:(NSSize)inset;
- (NSSize)textContainerInset;
- (void)setTextContainer:(NSTextContainer *)container;
- (NSTextContainer *)textContainer;
- (void)setEditable:(BOOL)flag;
- (void)setDrawsBackground:(BOOL)flag;
- (BOOL)drawsBackground;
- (void)setContinuousSpellCheckingEnabled:(BOOL)flag;
- (void)setConstrainedFrameSize:(NSSize)desiredSize;
// Class Methods
+ (void)registerForServices;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Instance Methods
- (void)cleanUpAfterDragOperation;
- (NSArray *)acceptableDragTypes;
- (void)clickedOnLink:(id)link v
- (void)alignJustified:(id)sender;
- (void)changeColor:(id)sender;
- (void)didChangeText;
- (BOOL)becomeFirstResponder;
- (NSImage *)dragImageForSelectionWithEvent:(NSEvent *)event origin:(NSPointPointer)
- (unsigned int)dragOperationForDraggingInfo:(id <NSDraggingInfo>)dragInfo type:(NS
- (BOOL)dragSelectionWithEvent:(NSEvent *)event  offset:(NSSize)mouseOffset slideBa
- (void)insertText:(id)insertString;
- (void)invalidateTextContainerOrigin;
- (BOOL)isContinuousSpellCheckingEnabled;
- (BOOL)isEditable;
- (BOOL)isFieldEditor;
- (BOOL)isRichText;
- (BOOL)isSelectable;
- (NSLayoutManager *)layoutManager;
- (void)loosenKerning:(id)sender;
- (void)lowerBaseline:(id)sender;
- (NSString *)preferredPasteboardTypeFromArray:(NSArray *)availableTypes
    restrictedToTypesFromArray:(NSArray *)allowedTypes;
- (void)raiseBaseline:(id)sender;
- (NSRange)rangeForUserCharacterAttributeChange;
- (NSRange)rangeForUserParagraphAttributeChange;
- (NSRange)rangeForUserTextChange;
- (BOOL)readSelectionFromPasteboard:(NSPasteboard *)pboard;
- (BOOL)readSelectionFromPasteboard:(NSPasteboard *)pboard type:(NSString *)type;
- (NSArray *)readablePasteboardTypes;
- (void)replaceTextContainer:(NSTextContainer *)newContainer;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)resignFirstResponder;
- (void)drawInsertionPointInRect:(NSRect)rect color:(NSColor *)color turnedOn:(BOOL)
- (BOOL)isRulerVisible;
- (void)pasteAsPlainText:(id)sender;
- (void)pasteAsRichText:(id)sender;
- (void)rulerView:(NSRulerView *)ruler didAddMarker:(NSRulerMarker *)marker;
- (void)rulerView:(NSRulerView *)ruler didMoveMarker:(NSRulerMarker *)marker;
- (void)rulerView:(NSRulerView *)ruler didRemoveMarker:(NSRulerMarker *)marker;
- (void)rulerView:(NSRulerView *)ruler handleMouseDown:(NSEvent *)event;
- (BOOL)rulerView:(NSRulerView *)ruler shouldAddMarker:(NSRulerMarker *)marker;
- (BOOL)rulerView:(NSRulerView *)ruler shouldMoveMarker:(NSRulerMarker *)marker;
- (BOOL)rulerView:(NSRulerView *)ruler shouldRemoveMarker:(NSRulerMarker *)marker;
- (float)rulerView:(NSRulerView *)ruler willAddMarker:(NSRulerMarker *)marker atLoca
- (float)rulerView:(NSRulerView *)ruler willMoveMarker:(NSRulerMarker *)marker toLoc
- (NSSelectionAffinity)selectionAffinity;
- (NSRange)selectionRangeForProposedRange:(NSRange)proposedCharRange
    granularity:(NSSelectionGranularity)granularity;
- (BOOL)shouldChangeTextInRange:(NSRange)affectedCharRange replacementString:(NSStri
- (BOOL)shouldDrawInsertionPoint;
- (NSRange)smartDeleteRangeForProposedRange:(NSRange)proposedCharRange;
- (NSString *)smartInsertAfterStringForString:(NSString *)pasteString
    replacingRange:(NSRange)charRangeToReplace;
- (NSString *)smartInsertBeforeStringForString:(NSString *)pasteString replacingRang
- (void)smartInsertForString:(NSString *)pasteString replacingRange:(NSRange)charRa
    beforeString:(NSString **)beforeString afterString:(NSString **)afterString;
- (int)spellCheckerDocumentTag;
- (void)startSpeaking:(id)sender;
- (void)stopSpeaking:(id)sender;
- (NSPoint)textContainerOrigin;
- (NSTextStorage *)textStorage;
- (void)tightenKerning:(id)sender;
- (void)toggleContinuousSpellChecking:(id)sender;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)toggleTraditionalCharacterShape:(id)sender;
- (void)turnOffKerning:(id)sender;
- (void)turnOffLigatures:(id)sender;
- (void)updateDragTypeRegistration;
- (void)updateFontPanel;
- (void)updateInsertionPointStateAndRestartTimer:(BOOL)restartFlag;
- (void)updateRuler;
- (void)useAllLigatures:(id)sender;
- (void)useStandardKerning:(id)sender;
- (void)useStandardLigatures:(id)sender;
- (id)validRequestorForSendType:(NSString *)sendType returnType:(NSString *)returnTy
- (NSArray *)writablePasteboardTypes;
- (BOOL)writeSelectionToPasteboard:(NSPasteboard *)pboard type:(NSString *)type;
- (BOOL)writeSelectionToPasteboard:(NSPasteboard *)pboard types:(NSArray *)types;
// Methods Implementing NSTextInput
- (void)insertText:(id)aString;
- (void)doCommandBySelector:(SEL)aSelector;
- (void)setMarkedText:(id)aString selectedRange:(NSRange)selRange;
- (void)unmarkText;
- (BOOL)hasMarkedText;
- (long)conversationIdentifier;
- (NSAttributedString *)attributedSubstringFromRange:(NSRange)theRange;
- (NSRange)markedRange;
- (NSRange)selectedRange;
- (NSRect)firstRectForCharacterRange:(NSRange)theRange;
- (unsigned int)characterIndexForPoint:(NSPoint)thePoint;
- (NSArray*)validAttributesForMarkedText;
// Methods Implemented by the Delegate
- (void)textView:(NSTextView *)textView clickedOnCell:(id <NSTextAttachmentCell>)ce
    inRect:(NSRect)cellFrame;
- (void)textView:(NSTextView *)textView clickedOnCell:(id <NSTextAttachmentCell>)ce
    inRect:(NSRect)cellFrame atIndex:(unsigned)charIndex;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)textView:(NSTextView *)textView clickedOnLink:(id)link;
- (BOOL)textView:(NSTextView *)textView clickedOnLink:(id)link atIndex:(unsigned)cha
- (BOOL)textView:(NSTextView *)textView doCommandBySelector:(SEL)commandSelector;
- (void)textView:(NSTextView *)textView doubleClickedOnCell:(id <NSTextAttachmentCe
    inRect:(NSRect)cellFrame;
- (void)textView:(NSTextView *)textView doubleClickedOnCell:(id <NSTextAttachmentCe
    inRect:(NSRect)cellFrame atIndex:(unsigned)charIndex;
- (BOOL)textView:(NSTextView *)textView shouldChangeTextInRange:(NSRange)affectedCha
    replacementString:(NSString *)replacementString;
- (NSRange)textView:(NSTextView *)textView
    willChangeSelectionFromCharacterRange:(NSRange)oldSelectedCharRange
    toCharacterRange:(NSRange)newSelectedCharRange;
- (void)textView:(NSTextView *)view draggedCell:(id <NSTextAttachmentCell>)cell
    inRect:(NSRect)rect event:(NSEvent *)event;
- (void)textView:(NSTextView *)view draggedCell:(id <NSTextAttachmentCell>)cell inR
    event:(NSEvent *)event atIndex:(unsigned)charIndex;
- (NSArray *)textView:(NSTextView *)view writablePasteboardTypesForCell:(id <NSText
    atIndex:(unsigned)charIndex;
- (BOOL)textView:(NSTextView *)view writeCell:(id <NSTextAttachmentCell>)cell atInd
    toPasteboard:(NSPasteboard *)pboard type:(NSString *)type;
- (void)textViewDidChangeSelection:(NSNotification *)notification;
- (NSUndoManager *)undoManagerForTextView:(NSTextView *)view;
// Notifications
NSTextViewDidChangeSelectionNotification;
NSTextViewWillChangeNotifyingTextViewNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# NSToolbar

Mac OS X 10.0

This class manages a toolbar in an application window. Everytoolbar has an identifier, and multiple toolb application with the same identifier (say, in multiple open document windows) will keep the same state. take a delegate that provides the toolbar with `NSToolbarItem` s to populate the toolbar and the toolbar c sheet.

```
@interface NSToolbar : NSObject
 // Initializers
   - (id)initWithIdentifier:(NSString *)identifier;
 // Accessor Methods
   - (void)setConfigurationFromDictionary:(NSDictionary *)configDict;
   - (void)setDelegate:(id)delegate;
   - (id)delegate;
   - (void)setVisible:(BOOL)shown;
   - (void)setAllowsUserCustomization:(BOOL)allowCustomization;
   - (BOOL)allowsUserCustomization;
   - (void)setDisplayMode:(NSToolbarDisplayMode)displayMode;
   - (NSToolbarDisplayMode)displayMode;
   - (void)setSizeMode:(NSToolbarSizeMode)sizeMode;
   - (NSToolbarSizeMode)sizeMode;
   - (void)setAutosavesConfiguration:(BOOL)flag;
   - (BOOL)autosavesConfiguration;
 // Instance Methods
   - (NSDictionary *)configurationDictionary;
   - (NSString *)identifier;
   - (BOOL)customizationPaletteIsRunning;
   - (void)insertItemWithItemIdentifier:(NSString *)itemIdentifier atIndex:(int)index;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)isVisible;
- (NSArray *)items;
- (void)removeItemAtIndex:(int)index;
- (void)runCustomizationPalette:(id)sender;
- (void)validateVisibleItems;
- (NSArray *)visibleItems;
// Methods Implemented by the Delegate
- (NSToolbarItem *)toolbar:(NSToolbar *)toolbar itemForItemIdentifier:(NSString *)i
    willBeInsertedIntoToolbar:(BOOL)flag;
- (NSArray *)toolbarAllowedItemIdentifiers:(NSToolbar*)toolbar;
- (NSArray *)toolbarDefaultItemIdentifiers:(NSToolbar*)toolbar;
- (void)toolbarDidRemoveItem:(NSNotification *)notification;
- (void)toolbarWillAddItem:(NSNotification *)notification;
// Notifications
NSToolbarDidRemoveItemNotification;
NSToolbarWillAddItemNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSToolbarItem — Mac OS X 10.0

This class represents the controls that populate toolbars in the user interface. By default, a toolbar item is an icon with a label attached. This icon functions as as simple button. Like instances of `NSButton`, an `NSToolbarItem` object sends an action message to a target when the user clicks the item. To initialize a toolbar item, we use the method `initWithItemIdentifier:`. The identifier is simply a string used to uniquely identify the toolbar item. AppKit has a number of prebuilt toolbar items that are used for common tasks, such as opening the color panel or starting a print job. To take advantage of these standard toolbar items, initialize the toolbar item with one of the identifier strings listed in the constants herein.

The second type of toolbar item is a custom `NSView` assigned to the toolbar item. The method `setView:` can be used to create a view in Interface Builder (or programatically) with a small set of controls suitable for a toolbar, and then create a toolbar item out of this view. This allows you to put standard AppKit controls (such as sliders or radio buttons) in the toolbar.

```
@interface NSToolbarItem : NSObject <NSCopying, NSValidatedUserInterfaceItem>
 // Initializers
   - (id)initWithItemIdentifier:(NSString *)itemIdentifier;
 // Accessor Methods
   - (void)setMinSize:(NSSize)size;
   - (NSSize)minSize;
   - (void)setTag:(int)tag;
   - (int)tag;
   - (void)setMaxSize:(NSSize)size;
   - (NSSize)maxSize;
   - (void)setLabel:(NSString *)label;
   - (NSString *)label;
   - (void)setTarget:(id)target;
   - (id)target;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setPaletteLabel:(NSString *)paletteLabel;
- (NSString *)paletteLabel;
- (void)setEnabled:(BOOL)enabled;
- (void)setAction:(SEL)action;
- (SEL)action;
- (void)setImage:(NSImage*)image;
- (NSImage *)image;
- (void)setToolTip:(NSString*)toolTip;
- (NSString *)toolTip;
- (void)setView:(NSView *)view;
- (NSView *)view;
- (void)setMenuFormRepresentation:(NSMenuItem *)menuItem;
- (NSMenuItem *)menuFormRepresentation;
// Instance Methods
- (BOOL)allowsDuplicatesInToolbar;
- (BOOL)isEnabled;
- (NSString *)itemIdentifier;
- (NSToolbar *)toolbar;
- (void)validate;
// Methods Implementing NSCopying
- (id)copyWithZone:(NSZone *)zone;
// Methods Implementing NSValidatedUserInterfaceItem
- (SEL)action;
- (int)tag;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSTypesetter* *Mac OS X 10.0*

This abstract class provides an interface to objects that `NSLayoutManager` uses to layout lines in a text c Application Kit implements a single concrete subclass of `NSTypesetter` in `NSSimpleHorizontalTypesett` information about Cocoa's text layout system, see Chapter 5.

```
@interface NSTypesetter : NSObject
 // Class Methods
   + (NSTypesetterBehavior)defaultTypesetterBehavior;
   + (NSSize)printingAdjustmentInLayoutManager:(NSLayoutManager *)layoutMgr
        forNominallySpacedGlyphRange:(NSRange)nominallySpacedGlyphsRange
        packedGlyphs:(const unsigned char *)packedGlyphs  count:(unsigned)packedGlyphs(
   + (id)sharedSystemTypesetter;
   + (id)sharedSystemTypesetterForBehavior:(NSTypesetterBehavior)theBehavior;
 // Instance Methods
   - (float)baselineOffsetInLayoutManager:(NSLayoutManager *)layoutMgr glyphIndex:(uns:
   - (void)layoutGlyphsInLayoutManager:(NSLayoutManager *)layoutManager
        startingAtGlyphIndex:(unsigned)startGlyphIndex maxNumberOfLineFragments:(unsig
        nextGlyphIndex:(unsigned *)nextGlyph;
```

### Subclasses

`NSSimpleHorizontalTypesetter`



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSView* *Mac OS X 10.0*

This is the Cocoa interface to Mac OS X's graphics APIs, including Quartz 2D, OpenGL (using `NSOpenGLVie` `NSQuickDrawView` ). Anything that is drawn to screen in Cocoa is done so within a view object. Develope behavior by subclassing `NSView` and overriding the `drawRect` : method. See Chapter 3 for more informat classes in the AppKit.

```
@interface NSView : NSResponder
 // Initializers
   - (id)initWithFrame:(NSRect)frameRect;
 // Accessor Methods
   - (void)setBoundsSize:(NSSize)newSize;
   - (void)setFrameOrigin:(NSPoint)newOrigin;
   - (void)setFrame:(NSRect)frameRect;
   - (NSRect)frame;
   - (void)setAutoresizingMask:(unsigned int)mask;
   - (unsigned int)autoresizingMask;
   - (void)setUpGState;
   - (void)setBoundsRotation:(float)angle;
   - (float)boundsRotation;
   - (void)setAutoresizesSubviews:(BOOL)flag;
   - (BOOL)autoresizesSubviews;
   - (void)setNeedsDisplayInRect:(NSRect)invalidRect;
   - (void)setBoundsOrigin:(NSPoint)newOrigin;
   - (void)setFrameRotation:(float)angle;
   - (float)frameRotation;
   - (void)setNeedsDisplay:(BOOL)flag;
   - (BOOL)needsDisplay;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setToolTip:(NSString *)string;
- (NSString *)toolTip;
- (void)setFrameSize:(NSSize)newSize;
- (void)setBounds:(NSRect)aRect;
- (NSRect)bounds;
- (void)setPostsFrameChangedNotifications:(BOOL)flag;
- (BOOL)postsFrameChangedNotifications;
- (void)setPostsBoundsChangedNotifications:(BOOL)flag;
- (BOOL)postsBoundsChangedNotifications;
// Class Methods
+ (NSMenu *)defaultMenu;
+ (NSView *)focusView;
// Instance Methods
- (BOOL)acceptsFirstMouse:(NSEvent *)theEvent;
- (NSView *)ancestorSharedWithView:(NSView *)aView;
- (void)addSubview:(NSView *)aView;
- (void)addSubview:(NSView *)aView positioned:(NSWindowOrderingMode)place relativeTo
- (void)allocateGState;
- (NSToolTipTag)addToolTipRect:(NSRect)aRect owner:(id)anObject userData:(void *)da
- (void)addCursorRect:(NSRect)aRect cursor:(NSCursor *)anObj;
- (NSTrackingRectTag)addTrackingRect:(NSRect)aRect owner:(id)anObject userData:(voi
    assumeInside:(BOOL)flag;
- (BOOL)autoscroll:(NSEvent *)theEvent;
- (void)beginDocument;
- (void)beginPageInRect:(NSRect)aRect atPlacement:(NSPoint)location;
- (BOOL)canDraw;
- (void)adjustPageHeightNew:(float *)newBottom top:(float)oldTop bottom:(float)oldB
    limit:(float)bottomLimit;
- (void)adjustPageWidthNew:(float *)newRight left:(float)oldLeft right:(float)oldRi
- (NSRect)adjustScroll:(NSRect)newVisible;
- (NSRect)centerScanRect:(NSRect)aRect;
- (NSPoint)convertPoint:(NSPoint)aPoint fromView:(NSView *)aView;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSPoint)convertPoint:(NSPoint)aPoint toView:(NSView *)aView;
- (NSRect)convertRect:(NSRect)aRect fromView:(NSView *)aView;
- (NSRect)convertRect:(NSRect)aRect toView:(NSView *)aView;
- (NSSize)convertSize:(NSSize)aSize fromView:(NSView *)aView;
- (NSSize)convertSize:(NSSize)aSize toView:(NSView *)aView;
- (NSData *)dataWithEPSInsideRect:(NSRect)rect;
- (NSData *)dataWithPDFInsideRect:(NSRect)rect;
- (void)didAddSubview:(NSView *)subview;
- (void)discardCursorRects;
- (void)display;
- (void)displayIfNeeded;
- (void)displayIfNeededIgnoringOpacity;
- (void)displayIfNeededInRect:(NSRect)rect;
- (void)displayIfNeededInRectIgnoringOpacity:(NSRect)rect;
- (void)displayRect:(NSRect)rect;
- (void)displayRectIgnoringOpacity:(NSRect)rect;
- (void)drawPageBorderWithSize:(NSSize)borderSize;
- (void)drawRect:(NSRect)rect;
- (void)drawSheetBorderWithSize:(NSSize)borderSize;
- (NSScrollView *)enclosingScrollView;
- (void)endDocument;
- (void)endPage;
- (int)gState;
- (float)heightAdjustLimit;
- (NSView *)hitTest:(NSPoint)aPoint;
- (BOOL)inLiveResize;
- (BOOL)isDescendantOf:(NSView *)aView;
- (BOOL)isFlipped;
- (BOOL)isOpaque;
- (BOOL)isRotatedFromBase;
- (BOOL)isRotatedOrScaledFromBase;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)knowsPageRange:(NSRangePointer)range;
- (NSPoint)locationOfPrintRect:(NSRect)aRect;
- (void)lockFocus;
- (BOOL)lockFocusIfCanDraw;
- (NSMenu *)menuForEvent:(NSEvent *)event;
- (BOOL)mouse:(NSPoint)aPoint inRect:(NSRect)aRect;
- (BOOL)mouseDownCanMoveWindow;
- (BOOL)needsPanelToBecomeKey;
- (NSView *)opaqueAncestor;
- (BOOL)performKeyEquivalent:(NSEvent *)theEvent;
- (void)print:(id)sender;
- (NSString *)printJobTitle;
- (NSRect)rectForPage:(int)page;
- (void)reflectScrolledClipView:(NSClipView *)aClipView;
- (void)releaseGState;
- (void)removeAllToolTips;
- (void)removeCursorRect:(NSRect)aRect cursor:(NSCursor *)anObj;
- (void)removeFromSuperview;
- (void)removeFromSuperviewWithoutNeedingDisplay;
- (void)removeToolTip:(NSToolTipTag)tag;
- (void)removeTrackingRect:(NSTrackingRectTag)tag;
- (void)renewGState;
- (void)replaceSubview:(NSView *)oldView with:(NSView *)newView;
- (void)resetCursorRects;
- (void)resizeSubviewsWithOldSize:(NSSize)oldSize;
- (void)resizeWithOldSuperviewSize:(NSSize)oldSize;
- (void)rotateByAngle:(float)angle;
- (void)scaleUnitSquareToSize:(NSSize)newUnitSize;
- (void)scrollClipView:(NSClipView *)aClipView toPoint:(NSPoint)aPoint;
- (void)scrollPoint:(NSPoint)aPoint;
- (void)scrollRect:(NSRect)aRect by:(NSSize)delta;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)scrollRectToVisible:(NSRect)aRect;
- (BOOL)shouldDelayWindowOrderingForEvent:(NSEvent *)theEvent;
- (BOOL)shouldDrawColor;
- (void)sortSubviewsUsingFunction:(int (*)(id, id, void *))compare context:(void *)c
- (NSArray *)subviews;
- (NSView *)superview;
- (int)tag;
- (void)translateOriginToPoint:(NSPoint)translation;
- (void)unlockFocus;
- (void)viewDidEndLiveResize;
- (void)viewDidMoveToSuperview;
- (void)viewDidMoveToWindow;
- (void)viewWillMoveToSuperview:(NSView *)newSuperview;
- (void)viewWillMoveToWindow:(NSWindow *)newWindow;
- (void)viewWillStartLiveResize;
- (id)viewWithTag:(int)aTag;
- (NSRect)visibleRect;
- (float)widthAdjustLimit;
- (void)willRemoveSubview:(NSView *)subview;
- (NSWindow *)window;
- (void)writeEPSInsideRect:(NSRect)rect toPasteboard:(NSPasteboard *)pasteboard;
- (void)writePDFInsideRect:(NSRect)rect toPasteboard:(NSPasteboard *)pasteboard;
// Notifications
NSViewBoundsDidChangeNotification;
NSViewFocusDidChangeNotification;
NSViewFrameDidChangeNotification;
NSViewGlobalFrameDidChangeNotification;
```

## Subclasses

NSBox , NSClipView , NSControl , NSMenuView , NSMovieView , NSOpenGLView , NSProgressIndicator
NSRulerView , NSScrollView , NSSplitView , NSTabView , NSTableHeaderView , NSText

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# *NSWindow* *Mac OS X 10.0*

This class declares an interface to application windows and is one of the key components of the Applicati objects are responsible for managing and displaying a hierarchy of views within the window, as well as h events that occur in the window.

```
@interface NSWindow : NSResponder
 // Initializers
   - (id)initWithContentRect:(NSRect)contentRect styleMask:(unsigned int)aStyle
       backing:(NSBackingStoreType)bufferingType defer:(BOOL)flag;
   - (id)initWithContentRect:(NSRect)contentRect styleMask:(unsigned int)aStyle
       backing:(NSBackingStoreType)bufferingType defer:(BOOL)flag screen:(NSScreen *)s
   - (NSWindow *)initWithWindowRef:(void * /* WindowRef */)windowRef;
   - (NSView *)initialFirstResponder;
 // Accessor Methods
   - (void)setAspectRatio:(NSSize)ratio;
   - (NSSize)aspectRatio;
   - (void)setOrderedIndex:(int)index;
   - (int)orderedIndex;
   - (void)setIsVisible:(BOOL)flag;
   - (BOOL)isVisible;
   - (void)setTitle:(NSString *)aString;
   - (NSString *)title;
   - (void)setIsMiniaturized:(BOOL)flag;
   - (BOOL)isMiniaturized;
   - (void)setRepresentedFilename:(NSString *)aString;
   - (NSString *)representedFilename;
   - (void)setTitleWithRepresentedFilename:(NSString *)filename;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setExcludedFromWindowsMenu:(BOOL)flag;
- (void)setIsZoomed:(BOOL)flag;
- (BOOL)isZoomed;
- (void)setMiniwindowTitle:(NSString *)title;
- (NSString *)miniwindowTitle;
- (void)setDelegate:(id)anObject;
- (id)delegate;
- (void)setToolbar:(NSToolbar*)toolbar;
- (NSToolbar *)toolbar;
- (void)setDefaultButtonCell:(NSButtonCell *)defButt;
- (NSButtonCell *)defaultButtonCell;
- (void)setParentWindow:(NSWindow *)window;
- (NSWindow *)parentWindow;
- (void)setFrame:(NSRect)frameRect display:(BOOL)flag;
- (NSRect)frame;
- (void)setFrameOrigin:(NSPoint)aPoint;
- (void)setFrameTopLeftPoint:(NSPoint)aPoint;
- (void)setFrame:(NSRect)frameRect display:(BOOL)displayFlag animate:(BOOL)animateF
- (void)setResizeIncrements:(NSSize)increments;
- (NSSize)resizeIncrements;
- (void)setWindowController:(NSWindowController *)windowController;
- (id)windowController;
- (void)setMovableByWindowBackground:(BOOL)flag;
- (void)setIgnoresMouseEvents:(BOOL)flag;
- (BOOL)ignoresMouseEvents;
- (void)setAcceptsMouseMovedEvents:(BOOL)flag;
- (BOOL)acceptsMouseMovedEvents;
- (void)setMaxSize:(NSSize)size;
- (NSSize)maxSize;
- (void)setMiniwindowImage:(NSImage *)image;
- (NSImage *)miniwindowImage;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setCanHide:(BOOL)flag;
- (BOOL)canHide;
- (BOOL)setFrameAutosaveName:(NSString *)name;
- (NSString *)frameAutosaveName;
- (BOOL)setFrameUsingName:(NSString *)name;
- (void)setAutodisplay:(BOOL)flag;
- (BOOL)setFrameUsingName:(NSString *)name force:(BOOL)force;
- (void)setFrameFromString:(NSString *)string;
- (void)setOpaque:(BOOL)isOpaque;
- (void)setAlphaValue:(float)windowAlpha;
- (float)alphaValue;
- (void)setHasShadow:(BOOL)hasShadow;
- (BOOL)hasShadow;
- (void)setReleasedWhenClosed:(BOOL)flag;
- (void)setDynamicDepthLimit:(BOOL)flag;
- (void)setHidesOnDeactivate:(BOOL)flag;
- (BOOL)hidesOnDeactivate;
- (void)setLevel:(int)newLevel;
- (int)level;
- (void)setBackingType:(NSBackingStoreType)bufferingType;
- (NSBackingStoreType)backingType;
- (void)setOneShot:(BOOL)flag;
- (void)setBackgroundColor:(NSColor *)color;
- (NSColor *)backgroundColor;
- (void)setMinSize:(NSSize)size;
- (NSSize)minSize;
- (void)setContentView:(NSView *)aView;
- (id)contentView;
- (void)setDocumentEdited:(BOOL)flag;
- (void)setInitialFirstResponder:(NSView *)view;
- (void)setShowsResizeIndicator:(BOOL)show;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)showsResizeIndicator;
- (void)setViewsNeedDisplay:(BOOL)flag;
- (BOOL)viewsNeedDisplay;
- (void)setDepthLimit:(NSWindowDepth)limit;
- (NSWindowDepth)depthLimit;
- (void)setContentSize:(NSSize)aSize;
// Class Methods
+ (NSRect)contentRectForFrameRect:(NSRect)fRect styleMask:(unsigned int)aStyle;
+ (NSWindowDepth)defaultDepthLimit;
+ (NSRect)frameRectForContentRect:(NSRect)cRect styleMask:(unsigned int)aStyle;
+ (void)menuChanged:(NSMenu *)menu;
+ (float)minFrameWidthWithTitle:(NSString *)aTitle styleMask:(unsigned int)aStyle;
+ (void)removeFrameUsingName:(NSString *)name;
+ (NSButton *)standardWindowButton:(NSWindowButton)b forStyleMask:(unsigned int)sty
// Instance Methods
- (BOOL)canBecomeKeyWindow;
- (BOOL)canBecomeMainWindow;
- (void)becomeKeyWindow;
- (NSArray *)childWindows;
- (void)becomeMainWindow;
- (void)addChildWindow:(NSWindow *)childWin ordered:(NSWindowOrderingMode)place;
- (NSTimeInterval)animationResizeTime:(NSRect)newFrame;
- (NSPoint)cascadeTopLeftFromPoint:(NSPoint)topLeftPoint;
- (NSWindow *)attachedSheet;
- (NSEvent *)currentEvent;
- (void)cacheImageInRect:(NSRect)aRect;
- (void)close;
- (BOOL)canStoreColor;
- (BOOL)areCursorRectsEnabled;
- (void)center;
- (NSRect)constrainFrameRect:(NSRect)frameRect toScreen:(NSScreen *)screen;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSPoint)convertBaseToScreen:(NSPoint)aPoint;
- (NSPoint)convertScreenToBase:(NSPoint)aPoint;
- (NSData *)dataWithEPSInsideRect:(NSRect)rect;
- (NSData *)dataWithPDFInsideRect:(NSRect)rect;
- (NSScreen *)deepestScreen;
- (void)deminiaturize:(id)sender;
- (NSDictionary *)deviceDescription;
- (void)disableCursorRects;
- (void)disableFlushWindow;
- (void)disableKeyEquivalentForDefaultButtonCell;
- (void)discardCachedImage;
- (void)discardCursorRects;
- (void)discardEventsMatchingMask:(unsigned int)mask beforeEvent:(NSEvent *)lastEve
- (void)display;
- (void)displayIfNeeded;
- (void)dragImage:(NSImage *)anImage at:(NSPoint)baseLocation offset:(NSSize)initia
    event:(NSEvent *)event pasteboard:(NSPasteboard *)pboard source:(id)sourceObj s
- (NSArray *)drawers;
- (void)enableCursorRects;
- (void)enableFlushWindow;
- (void)enableKeyEquivalentForDefaultButtonCell;
- (void)endEditingFor:(id)anObject;
- (NSText *)fieldEditor:(BOOL)createFlag forObject:(id)anObject;
- (NSResponder *)firstResponder;
- (void)flushWindow;
- (void)flushWindowIfNeeded;
- (int)gState;
- (id)handleCloseScriptCommand:(NSCloseCommand *)command;
- (id)handlePrintScriptCommand:(NSScriptCommand *)command;
- (id)handleSaveScriptCommand:(NSScriptCommand *)command;
- (BOOL)hasCloseBox;
- (BOOL)hasDynamicDepthLimit;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (BOOL)hasTitleBar;
- (void)invalidateCursorRectsForView:(NSView *)aView;
- (void)invalidateShadow;
- (BOOL)isAutodisplay;
- (BOOL)isDocumentEdited;
- (BOOL)isExcludedFromWindowsMenu;
- (BOOL)isFloatingPanel;
- (BOOL)isFlushWindowDisabled;
- (BOOL)isKeyWindow;
- (BOOL)isMainWindow;
- (BOOL)isMiniaturizable;
- (BOOL)isModalPanel;
- (BOOL)isMovableByWindowBackground;
- (BOOL)isOneShot;
- (BOOL)isOpaque;
- (BOOL)isReleasedWhenClosed;
- (BOOL)isResizable;
- (BOOL)isSheet;
- (BOOL)isZoomable;
- (void)keyDown:(NSEvent *)theEvent;
- (NSSelectionDirection)keyViewSelectionDirection;
- (BOOL)makeFirstResponder:(NSResponder *)aResponder;
- (void)makeKeyAndOrderFront:(id)sender;
- (void)makeKeyWindow;
- (void)makeMainWindow;
- (void)miniaturize:(id)sender;
- (NSPoint)mouseLocationOutsideOfEventStream;
- (NSEvent *)nextEventMatchingMask:(unsigned int)mask;
- (NSEvent *)nextEventMatchingMask:(unsigned int)mask untilDate:(NSDate *)expiratio
    dequeue:(BOOL)deqFlag;
- (void)orderBack:(id)sender;
- (void)orderFront:(id)sender;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)orderFrontRegardless;
- (void)orderOut:(id)sender;
- (void)orderWindow:(NSWindowOrderingMode)place relativeTo:(int)otherWin;
- (void)performClose:(id)sender;
- (void)performMiniaturize:(id)sender;
- (void)performZoom:(id)sender;
- (void)postEvent:(NSEvent *)event atStart:(BOOL)flag;
- (void)print:(id)sender;
- (void)registerForDraggedTypes:(NSArray *)newTypes;
- (void)removeChildWindow:(NSWindow *)childWin;
- (void)resetCursorRects;
- (void)resignKeyWindow;
- (void)resignMainWindow;
- (int)resizeFlags;
- (void)restoreCachedImage;
- (void)runToolbarCustomizationPalette:(id)sender;
- (void)saveFrameUsingName:(NSString *)name;
- (NSScreen *)screen;
- (void)selectKeyViewFollowingView:(NSView *)aView;
- (void)selectKeyViewPrecedingView:(NSView *)aView;
- (void)selectNextKeyView:(id)sender;
- (void)selectPreviousKeyView:(id)sender;
- (void)sendEvent:(NSEvent *)theEvent;
- (NSButton *)standardWindowButton:(NSWindowButton)b;
- (NSString *)stringWithSavedFrame;
- (unsigned int)styleMask;
- (void)toggleToolbarShown:(id)sender;
- (BOOL)tryToPerform:(SEL)anAction with:(id)anObject;
- (void)unregisterDraggedTypes;
- (void)update;
- (void)useOptimizedDrawing:(BOOL)flag;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (id)validRequestorForSendType:(NSString *)sendType  returnType:(NSString *)return
- (void * /*HWND*/)windowHandle;
- (int)windowNumber;
- (void * /* WindowRef */)windowRef;
- (BOOL)worksWhenModal;
- (void)zoom:(id)sender;
// Methods Implemented by the Delegate
- (void)windowDidBecomeKey:(NSNotification *)notification;
- (void)windowDidBecomeMain:(NSNotification *)notification;
- (void)windowDidChangeScreen:(NSNotification *)notification;
- (void)windowDidDeminiaturize:(NSNotification *)notification;
- (void)windowDidEndSheet:(NSNotification *)notification;
- (void)windowDidExpose:(NSNotification *)notification;
- (void)windowDidMiniaturize:(NSNotification *)notification;
- (void)windowDidMove:(NSNotification *)notification;
- (void)windowDidResignKey:(NSNotification *)notification;
- (void)windowDidResignMain:(NSNotification *)notification;
- (void)windowDidResize:(NSNotification *)notification;
- (void)windowDidUpdate:(NSNotification *)notification;
- (BOOL)windowShouldClose:(id)sender;
- (BOOL)windowShouldZoom:(NSWindow *)window toFrame:(NSRect)newFrame;
- (void)windowWillBeginSheet:(NSNotification *)notification;
- (void)windowWillClose:(NSNotification *)notification;
- (void)windowWillMiniaturize:(NSNotification *)notification;
- (void)windowWillMove:(NSNotification *)notification;
- (NSSize)windowWillResize:(NSWindow *)sender toSize:(NSSize)frameSize;
- (id)windowWillReturnFieldEditor:(NSWindow *)sender toObject:(id)client;
- (NSUndoManager *)windowWillReturnUndoManager:(NSWindow *)window;
- (NSRect)windowWillUseStandardFrame:(NSWindow *)window defaultFrame:(NSRect)newFra
// Notifications
NSWindowDidBecomeKeyNotification;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

| |
|---|
| NSWindowDidBecomeMainNotification; |
| NSWindowDidChangeScreenNotification; |
| NSWindowDidDeminiaturizeNotification; |
| NSWindowDidEndSheetNotification; |
| NSWindowDidMiniaturizeNotification; |
| NSWindowDidMoveNotification; |
| NSWindowDidResignKeyNotification; |
| NSWindowDidResignMainNotification; |
| NSWindowDidResizeNotification; |
| NSWindowDidUpdateNotification; |
| NSWindowWillBeginSheetNotification; |
| NSWindowWillCloseNotification; |
| NSWindowWillMiniaturizeNotification; |
| NSWindowWillMoveNotification; |

## Subclasses

NSPanel

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSWindowController* *Mac OS X 10.0*

This is one of the three classes that makes up Cocoa's document-based application architecture; the other two classes are `NSDocument` and `NSDocumentController`. Instances of `NSWindowController` are responsible for managing a single window for a document.`NSWindowController` has a close relationship with windows contained in nib files, which is evident in the initializer `initWithWindowNibName:`. This initializer will load the window in the nib and take ownership over it. See Chapter 3 for more information on `NSWindowController` and its role in document-based applications.

```
@interface NSWindowController : NSResponder <NSCoding>
 // Initializers
   - (id)initWithWindow:(NSWindow *)window;
   - (id)initWithWindowNibName:(NSString *)windowNibName;
   - (id)initWithWindowNibName:(NSString *)windowNibName owner:(id)owner;
   - (id)initWithWindowNibPath:(NSString *)windowNibPath owner:(id)owner;
 // Accessor Methods
   - (void)setWindowFrameAutosaveName:(NSString *)name;
   - (NSString *)windowFrameAutosaveName;
   - (void)setWindow:(NSWindow *)window;
   - (NSWindow *)window;
   - (void)setDocumentEdited:(BOOL)dirtyFlag;
   - (void)setShouldCloseDocument:(BOOL)flag;
   - (BOOL)shouldCloseDocument;
   - (void)setDocument:(NSDocument *)document;
   - (id)document;
   - (void)setShouldCascadeWindows:(BOOL)flag;
   - (BOOL)shouldCascadeWindows;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
// Instance Methods
  - (void)close;
  - (BOOL)isWindowLoaded;
  - (void)loadWindow;
  - (id)owner;
  - (IBAction)showWindow:(id)sender;
  - (void)synchronizeWindowTitleWithDocumentName;
  - (void)windowDidLoad;
  - (NSString *)windowNibName;
  - (NSString *)windowNibPath;
  - (NSString *)windowTitleForDocumentDisplayName:(NSString *)displayName;
  - (void)windowWillLoad;
// Methods Implementing NSCoding
  - (void)encodeWithCoder:(NSCoder *)aCoder;
  - (id)initWithCoder:(NSCoder *)aDecoder;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

# NSWorkspace — Mac OS X 10.0

This class makes available to Cocoa applications manyof Mac OS X's "workspace" services, which are es
the Finder. `NSWorkspace` provides methods for discovering characteristics of the workspace, such as wha
what volumes are mounted. Additionally, applications can use`NSWorkspace` to open files and URLs as if t
Each application has a single shared instance of`NSWorkspace` that is accessed with the method `sharedWo`

```
@interface NSWorkspace : NSObject
 // Class Methods
   + (NSWorkspace *)sharedWorkspace;
 // Instance Methods
   - (NSDictionary *)activeApplication;
   - (void)checkForRemovableMedia;
   - (int)extendPowerOffBy:(int)requested;
   - (BOOL)fileSystemChanged;
   - (void)findApplications;
   - (NSString *)fullPathForApplication:(NSString *)appName;
   - (BOOL)getFileSystemInfoForPath:(NSString *)fullPath isRemovable:(BOOL *)removable
       isWritable:(BOOL *)writableFlag isUnmountable:(BOOL *)unmountableFlag descript
       type:(NSString **)fileSystemType;
   - (BOOL)getInfoForFile:(NSString *)fullPath application:(NSString **)appName type:(
   - (void)hideOtherApplications;
   - (NSImage *)iconForFile:(NSString *)fullPath;
   - (NSImage *)iconForFileType:(NSString *)fileType;
   - (NSImage *)iconForFiles:(NSArray *)fullPaths;
   - (BOOL)isFilePackageAtPath:(NSString *)fullPath;
   - (BOOL)launchApplication:(NSString *)appName;
   - (BOOL)launchApplication:(NSString *)appName showIcon:(BOOL)showIcon autolaunch:(B
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (NSArray *)launchedApplications;
- (NSArray *)mountNewRemovableMedia;
- (NSArray *)mountedLocalVolumePaths;
- (NSArray *)mountedRemovableMedia;
- (void)noteFileSystemChanged;
- (void)noteFileSystemChanged:(NSString *)path;
- (void)noteUserDefaultsChanged;
- (NSNotificationCenter *)notificationCenter;
- (BOOL)openFile:(NSString *)fullPath;
- (BOOL)openFile:(NSString *)fullPath fromImage:(NSImage *)anImage at:(NSPoint)poin
- (BOOL)openFile:(NSString *)fullPath withApplication:(NSString *)appName;
- (BOOL)openFile:(NSString *)fullPath withApplication:(NSString *)appName andDeacti
- (BOOL)openTempFile:(NSString *)fullPath;
- (BOOL)openURL:(NSURL *)url;
- (BOOL)performFileOperation:(NSString *)operation source:(NSString *)source destina
    files:(NSArray *)files tag:(int *)tag;
- (BOOL)selectFile:(NSString *)fullPath inFileViewerRootedAtPath:(NSString *)rootFu
- (void)slideImage:(NSImage *)image from:(NSPoint)fromPoint to:(NSPoint)toPoint;
- (BOOL)unmountAndEjectDeviceAtPath:(NSString *)path;
- (BOOL)userDefaultsChanged;
// Notifications
NSWorkspaceWillPowerOffNotification;
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Chapter 16. Application Kit Protocols

This chapter covers the protocols of the Application Kit. The Application Kit implements all of the graphical user interface components of Cocoa, including the complete standard Aqua widget set. Additionally, the Application Kit provides classes for interacting with the Quartz 2D drawing system, and for managing and accessing resources such as colors, fonts, and printers. The Application Kit is introduced in Chapter 3. Chapter 4 and Chapter 5 went into more detail about those aspects of the Application Kit.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSAccessibility* *Mac OS X 10.2*

Cocoa provides support for accessibility, which gives Cocoa applications the ability to work with other assistive applications, such as screen readers. This informal protocol declares the methods that classes in an application must implement to interface with the accessibility system. The great majority of Application Kit classes implement this protocol, meaning that Cocoa applications are largely accessible to assistive technologies. However, if you do a great deal of customization to existing Cocoa classes, it may be necessary to implement portions of the protocol yourself.

```
@interface NSObject (NSAccessibility)
 // Instance Methods
   - (NSArray *)accessibilityAttributeNames;
   - (id)accessibilityAttributeValue:(NSString *)attribute;
   - (BOOL)accessibilityIsAttributeSettable:(NSString *)attribute;
   - (void)accessibilitySetValue:(id)value forAttribute:(NSString *)attribute;
   - (NSArray *)accessibilityActionNames;
   - (NSString *)accessibilityActionDescription:(NSString *)action;
   - (void)accessibilityPerformAction:(NSString *)action;
   - (BOOL)accessibilityIsIgnored;
   - (id)accessibilityHitTest:(NSPoint)point;
   - (id)accessibilityFocusedUIElement;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSChangeSpelling — Mac OS X 10.0

This protocol declares the single action method `changeSpelling:`, implemented to receive messages from the Spelling panel notifying them of text selections that need to be replaced. The sender of the `changeSpelling:` message is the Spelling panel. Classes should implement this method to query the sender for the word that the user has selected in the panel, and replace the current selection with that word.

```
@protocol NSChangeSpelling
 // Instance Methods
   - (void)changeSpelling:(id)sender;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSColorPickingCustom* *Mac OS X 10.0*

This protocol declares an interface for classes to conform to provide custom color pickers for the color-picker panel. This protocol is used closely with the `NSColorPickingDefault` protocol, which declares the basic interface for color pickers. The most straightforward way to create a custom color picker for your application is to subclass `NSColorPicker`, and implement the methods of this protocol in your subclass.

```
@protocol NSColorPickingCustom
  // Instance Methods
    - (BOOL)supportsMode:(int)mode;
    - (int)currentMode;
    - (NSView *)provideNewView:(BOOL)initialRequest;
    - (void)setColor:(NSColor *)newColor;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSColorPickingDefault* *Mac OS X 10.0*

This protocol declares an interface for classes to conform to in order to provide custom color pickers for color-picker panel. This protocol is used closely with the `NSColorPickingCustom` protocol. The Applicatio Kit implements the methods of this protocol in the `NSColorPicker` class. The most straightforward way t create a custom color picker for your application is to subclass `NSColorPicker` and implement the metho of `NSColorPickingCustom` in your subclass.

```
@protocol NSColorPickingDefault
 // Instance Methods
   - (id)initWithPickerMask:(int)mask colorPanel:(NSColorPanel *)owningColorPanel;
   - (NSImage *)provideNewButtonImage;
   - (void)insertNewButtonImage:(NSImage *)newButtonImage in:(NSButtonCell *)buttonCel
   - (void)viewSizeChanged:(id)sender;
   - (void)alphaControlAddedOrRemoved:(id)sender;
   - (void)attachColorList:(NSColorList *)colorList;
   - (void)detachColorList:(NSColorList *)colorList;
   - (void)setMode:(int)mode;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSComboBoxCellDataSource* *Mac OS X 10.0*

NSComboBox controls rely on data source objects to provide the contents of the combo box. This informa for NSComboBoxCell data source objects to implement. It declares methods that not only provide the co but support autocompletion behavior (where a string is returned from the data source that matches a pa into the combo box field). At a minimum, data source objects must implement the methods comboBoxCell:objectValueForItemAtIndex : and numberOfItemsInComboBoxCell :.

```
@interface NSObject (NSComboBoxCellDataSource)
 // Instance Methods
   - (int)numberOfItemsInComboBoxCell:(NSComboBoxCell *)comboBoxCell;
   - (id)comboBoxCell:(NSComboBoxCell *)aComboBoxCell objectValueForItemAtIndex:(int)i
   - (unsigned int)comboBoxCell:(NSComboBoxCell *)aComboBoxCell  indexOfItemWithString
   - (NSString *)comboBoxCell:(NSComboBoxCell *)aComboBoxCell completedString:(NSStrin
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSComboBoxDataSource* *Mac OS X 10.0*

This informal protocol provides methods for a class to implement to act as a data source for `NSComboBox` protocol declares methods that not only provide the contents of the combo box list, but support autocon behavior (where a string is returned from the data source that matches a partially completed string type combo box field). At a minimum, data source objects must implement the methods `comboBox:objectValueForItemAtIndex:` and `numberOfItemsInComboBox:`.

```
@interface NSObject (NSComboBoxDataSource)
 // Instance Methods
   - (int)numberOfItemsInComboBox:(NSComboBox *)aComboBox;
   - (id)comboBox:(NSComboBox *)aComboBox objectValueForItemAtIndex:(int)index;
   - (unsigned int)comboBox:(NSComboBox *)aComboBox indexOfItemWithStringValue:(NSStri
   - (NSString *)comboBox:(NSComboBox *)aComboBox completedString:(NSString *)string;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSDraggingDestination* *Mac OS X 10.0*

This informal protocol declares methods for objects to implement if they need to receive dragging operations. Several of the methods of `NSDraggingDestination` are implemented to respond to the movement of the drag operation of an destination object, while the remainder are implemented to execute and complete the dragging operation. Completing a drag operation involves retrieving and handling the data appropriately. To retrieve the data one must first obtain the `NSPasteboard` object in which the data is stored, for a dragging operation only knows about this pasteboard, not the data itself. The pasteboard may be obtained with the `draggingPasteboard` method. This is declared by the `NSDraggingInfo` protocol, and all dragging operation objects conform to this protocol. See the `NSDraggingInfo` protocol description and `NSPasteboard` class description for more information.

```
@interface NSObject (NSDraggingDestination)
 // Instance Methods
   - (NSDragOperation)draggingEntered:(id <NSDraggingInfo>)sender;
   - (NSDragOperation)draggingUpdated:(id <NSDraggingInfo>)sender;
   - (void)draggingExited:(id <NSDraggingInfo>)sender;
   - (BOOL)prepareForDragOperation:(id <NSDraggingInfo>)sender;
   - (BOOL)performDragOperation:(id <NSDraggingInfo>)sender;
   - (void)concludeDragOperation:(id <NSDraggingInfo>)sender;
   - (void)draggingEnded:(id <NSDraggingInfo>)sender;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSDraggingInfo* *Mac OS X 10.0*

This protocol declares methods that are used to provide an interface to objects that represent dragging sessions. When a dragging session begins, an object that conforms to this protocol is automatically created, and is the sender of all messages to the destination object, which implements the methods outlined in the `NSDraggingDestination` protocol. `NSDraggingInfo` exists to publish the interface for this object that represents the dragging operation, and as such developers never need to implement these methods.

```
@protocol NSDraggingInfo
 // Instance Methods
   - (NSWindow *)draggingDestinationWindow;
   - (NSDragOperation)draggingSourceOperationMask;
   - (NSPoint)draggingLocation;
   - (NSPoint)draggedImageLocation;
   - (NSImage *)draggedImage;
   - (NSPasteboard *)draggingPasteboard;
   - (id)draggingSource;
   - (int)draggingSequenceNumber;
   - (void)slideDraggedImageTo:(NSPoint)screenPoint;
   - (NSArray *)namesOfPromisedFilesDroppedAtDestination:(NSURL *)dropDestination;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSDraggingSource* *Mac OS X 10.0*

This informal protocol declares methods that a class must implement to serve as a source of data in dra
protocol declares a number of methods, but classes need only implement the method`draggingSourceOp`
to be a valid dragging operation source. Classes should implement this method to return a dragging sou
describes how data should be handled in a dragging operation. See`NSDraggingInfo` 's listing (previously

```
@interface NSObject (NSDraggingSource)
 // Instance Methods
   - (NSDragOperation)draggingSourceOperationMaskForLocal:(BOOL)flag;
   - (NSArray *)namesOfPromisedFilesDroppedAtDestination:(NSURL *)dropDestination;
   - (void)draggedImage:(NSImage *)image beganAt:(NSPoint)screenPoint;
   - (void)draggedImage:(NSImage *)image endedAt:(NSPoint)screenPoint operation:(NSDrag
   - (void)draggedImage:(NSImage *)image movedTo:(NSPoint)screenPoint;
   - (BOOL)ignoreModifierKeysWhileDragging;
   - (void)draggedImage:(NSImage *)image endedAt:(NSPoint)screenPoint deposited:(BOOL)
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSIgnoreMisspelledWords* *Mac OS X 10.0*

This protocol declares the single action method `ignoreSpelling:`, which should be implemented by classes that need to work with Cocoa's Spelling panel. `NSSpellChecker` sends this message up the responder chain. Classes implement this method so that the *Ignore* button in the Spelling panel functions properly for the particular application or document implementation.

```
@protocol NSIgnoreMisspelledWords
 // Instance Methods
   - (void)ignoreSpelling:(id)sender;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSInputServerMouseTracker* *Mac OS X 10.0*

This protocol declares an interface for mouse event handling that is tailored for use by text views. The methods of this protocol provide information about the character position of an event, in addition to the coordinates of the mouse location in the view.

```
@protocol NSInputServerMouseTracker
 // Instance Methods
   - (BOOL)mouseDownOnCharacterIndex:(unsigned)theIndex atCoordinate:(NSPoint)thePoint
       withModifier:(unsigned int)theFlags client:(id)sender;
   - (BOOL)mouseDraggedOnCharacterIndex:(unsigned)theIndex  atCoordinate:(NSPoint)theP
       withModifier:(unsigned int)theFlags client:(id)sender;
   - (void)mouseUpOnCharacterIndex:(unsigned)theIndex atCoordinate:(NSPoint)thePoint
       withModifier:(unsigned int)theFlags client:(id)sender;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSInputServiceProvider* *Mac OS X 10.0*

This protocol declares the interface for most of the functionality implemented by `NSInputServer` . Clients use this class to implement their own input server classes, or to implement a delegate object that can b with the standard `NSInputServer` .

```
@protocol NSInputServiceProvider
 // Instance Methods
   - (void)insertText:(id)aString client:(id)sender;
   - (void)doCommandBySelector:(SEL)aSelector client:(id)sender;
   - (void)markedTextAbandoned:(id)sender;
   - (void)markedTextSelectionChanged:(NSRange)newSel client:(id)sender;
   - (void)terminate:(id)sender;
   - (BOOL)canBeDisabled;
   - (BOOL)wantsToInterpretAllKeystrokes;
   - (BOOL)wantsToHandleMouseEvents;
   - (BOOL)wantsToDelayTextChangeNotifications;
   - (void)inputClientBecomeActive:(id)sender;
   - (void)inputClientResignActive:(id)sender;
   - (void)inputClientEnabled:(id)sender;
   - (void)inputClientDisabled:(id)sender;
   - (void)activeConversationWillChange:(id)sender fromOldConversation:(long)oldConver
   - (void)activeConversationChanged:(id)sender toNewConversation:(long)newConversatio
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## *NSMenuItem* *Mac OS X 10.0*

This protocol has been deprecated in favor of the class `NSMenuItem` , which takes over all of the functions with this protocol. See the `NSMenuItem` class description for more information.

```
@protocol NSMenuItem
 // Instance Methods
   - (id)initWithTitle:(NSString *)aString action:(SEL)aSelector keyEquivalent:(NSStri
   - (void)setMenu:(NSMenu *)menu;
   - (NSMenu *)menu;
   - (BOOL)hasSubmenu;
   - (void)setSubmenu:(NSMenu *)submenu;
   - (NSMenu *)submenu;
   - (void)setTitle:(NSString *)aString;
   - (NSString *)title;
   - (BOOL)isSeparatorItem;
   - (void)setKeyEquivalent:(NSString *)aKeyEquivalent;
   - (NSString *)keyEquivalent;
   - (void)setKeyEquivalentModifierMask:(unsigned int)mask;
   - (unsigned int)keyEquivalentModifierMask;
   - (NSString *)userKeyEquivalent;
   - (unsigned int)userKeyEquivalentModifierMask;
   - (void)setMnemonicLocation:(unsigned)location;
   - (unsigned)mnemonicLocation;
   - (NSString *)mnemonic;
   - (void)setTitleWithMnemonic:(NSString *)stringWithAmpersand;
   - (void)setImage:(NSImage *)menuImage;
   - (NSImage *)image;
   - (void)setState:(int)state;
   - (int)state;
```

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

```
- (void)setOnStateImage:(NSImage *)image;
- (NSImage *)onStateImage;
- (void)setOffStateImage:(NSImage *)image;
- (NSImage *)offStateImage;
- (void)setMixedStateImage:(NSImage *)image;
- (NSImage *)mixedStateImage;
- (void)setEnabled:(BOOL)flag;
- (BOOL)isEnabled;
- (void)setTarget:(id)anObject;
- (id)target;
- (void)setAction:(SEL)aSelector;
- (SEL)action;
- (void)setTag:(int)anInt;
- (int)tag;
- (void)setRepresentedObject:(id)anObject;
- (id)representedObject;
@end
```

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSMenuValidation — Mac OS X 10.0

This informal protocol declares the single method `validateMenuItem:`, which is implemented by classes of the a menu's target object. The class implements this method to return a `BOOL` specifying whether the menu item should be enabled or disabled. Whenever a menu is displayed, each menu item will send a `validateMenuItem:` message to its target (if the target responds), which then responds with `YES` or `NO` depending on whether or not the menu item should be enabled.

```
@interface NSObject (NSMenuValidation)
 // Instance Methods
   - (BOOL)validateMenuItem:(id <NSMenuItem>)menuItem;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSNibAwaking — Mac OS X 10.0

This informal protocol declares the single method `awakeFromNib:`, which is implemented by classes to perform any final initialization for objects that are being loaded from a nib. When this method is invoked, the outlets of an object are guaranteed to be connected to their respective objects.

```
@interface NSObject (NSNibAwaking)
 // Instance Methods
   - (void)awakeFromNib;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSOutlineViewDataSource* *Mac OS X 10.0*

Methods in this informal protocol are implemented by classes that provide the data contents for an NSOut source delegate object must implement the following four required methods of the protocol: outlineVie outlineView:isItemExpandable :, outlineView:numberOfChildrenOfItem :, outlineView:objectVa

In each of these four methods, outlineView : is the NSOutlineView object invoking the method. Every invocation of the data source methods, an outline view indicates a root item as nil . Thus, if outlineVie invoked with nil at the item, the implementation of this method would return the number of children ite

```
@interface NSObject (NSOutlineViewDataSource)
 // Instance Methods
   - (id)outlineView:(NSOutlineView *)outlineView child:(int)index ofItem:(id)item;
   - (BOOL)outlineView:(NSOutlineView *)outlineView isItemExpandable:(id)item;
   - (int)outlineView:(NSOutlineView *)outlineView  numberOfChildrenOfItem:(id)item;
   - (id)outlineView:(NSOutlineView *)outlineView objectValueForTableColumn:(NSTableCo
       byItem:(id)item;
   - (void)outlineView:(NSOutlineView *)outlineView v  forTableColumn:(NSTableColumn *
   - (id)outlineView:(NSOutlineView *)outlineView itemForPersistentObject:(id)object;
   - (id)outlineView:(NSOutlineView *)outlineView persistentObjectForItem:(id)item;
   - (BOOL)outlineView:(NSOutlineView *)olv  writeItems:(NSArray*)items toPasteboard:(N
   - (NSDragOperation)outlineView:(NSOutlineView*)olv validateDrop:(id <NSDraggingInfo>
       proposedItem:(id)item proposedChildIndex:(int)index;
   - (BOOL)outlineView:(NSOutlineView*)olv acceptDrop:(id <NSDraggingInfo>)info item:(i
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSServicesRequests* *Mac OS X 10.0*

This informal protocol declares the two methods `writeSelectionToPasteboard:types:` and `readSelectionFromPasteboard:`, which classes may implement to interact with system services found in the Services menu. The first of these, `writeSelectionToPasteboard:types:`, is used to provide data to a service, while `readSelectionFromPasteboard:` is used to retrieve data from a service.

```
@interface NSObject (NSServicesRequests)
 // Instance Methods
   - (BOOL)writeSelectionToPasteboard:(NSPasteboard *)pboard types:(NSArray *)types;
   - (BOOL)readSelectionFromPasteboard:(NSPasteboard *)pboard;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSTableDataSource* *Mac OS X 10.0*

Methods in this informal protocol are implemented by classes that provide the data displayed in an NSTab source classes must implement the methods `numberOfRowsInTableView` : and `tableView:objectValue` these methods are called frequently, so they should be efficient.

```
@interface NSObject (NSTableDataSource)
 // Instance Methods
   - (int)numberOfRowsInTableView:(NSTableView *)tableView;
   - (id)tableView:(NSTableView *)tableView objectValueForTableColumn:(NSTableColumn *
   - (void)tableView:(NSTableView *)tableView setObjectValue:(id)object forTableColumn
         row:(int)row;
   - (BOOL)tableView:(NSTableView *)tv writeRows:(NSArray*)rows toPasteboard:(NSPasteb
   - (NSDragOperation)tableView:(NSTableView*)tv validateDrop:(id <NSDraggingInfo>)inf
         proposedDropOperation:(NSTableViewDropOperation)op;
   - (BOOL)tableView:(NSTableView*)tv acceptDrop:(id <NSDraggingInfo>)info row:(int)ro
         dropOperation:(NSTableViewDropOperation)op;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSTextAttachmentCell* *Mac OS X 10.0*

This protocol declares an interface for classes that draw text attachments and handle mouse events with implements all of the methods of this protocol, less three: `cellBaselineOffset` , `setAttachment` :, and `NSTextAttachmentCell` extends `NSCell` 's interface by implementing these three methods.

```
@protocol NSTextAttachmentCell
 // Instance Methods
   - (void)drawWithFrame:(NSRect)cellFrame inView:(NSView *)controlView;
   - (BOOL)wantsToTrackMouse;
   - (void)highlight:(BOOL)flag withFrame:(NSRect)cellFrame inView:(NSView *)controlVi
   - (BOOL)trackMouse:(NSEvent *)theEvent  inRect:(NSRect)cellFrame ofView:(NSView *)c
         untilMouseUp:(BOOL)flag;
   - (NSSize)cellSize;
   - (NSPoint)cellBaselineOffset;
   - (void)setAttachment:(NSTextAttachment *)anObject;
   - (NSTextAttachment *)attachment;
   - (void)drawWithFrame:(NSRect)cellFrame inView:(NSView *)controlView characterIndex
   - (void)drawWithFrame:(NSRect)cellFrame inView:(NSView *)controlView characterIndex
         layoutManager:(NSLayoutManager *)layoutManager;
   - (BOOL)wantsToTrackMouseForEvent:(NSEvent *)theEvent inRect:(NSRect)cellFrame ofVi
         atCharacterIndex:(unsigned)charIndex;
   - (BOOL)trackMouse:(NSEvent *)theEvent  inRect:(NSRect)cellFrame ofView:(NSView *)c
         atCharacterIndex:(unsigned)charIndex untilMouseUp:(BOOL)flag;
   - (NSRect)cellFrameForTextContainer:(NSTextContainer *)textContainer  proposedLineF
         glyphPosition:(NSPoint)position characterIndex:(unsigned)charIndex;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSTextInput — Mac OS X 10.0

This protocol declares the methods that text view classes should implement to interface with Cocoa's input management system. In the Application Kit, `NSText` and `NSTextView` implement the methods of this protocol.

```
@protocol NSTextInput
 // Instance Methods
   - (void)insertText:(id)aString;
   - (void)doCommandBySelector:(SEL)aSelector;
   - (void)setMarkedText:(id)aString selectedRange:(NSRange)selRange;
   - (void)unmarkText;
   - (BOOL)hasMarkedText;
   - (long)conversationIdentifier;
   - (NSAttributedString *)attributedSubstringFromRange:(NSRange)theRange;
   - (NSRange)markedRange;
   - (NSRange)selectedRange;
   - (NSRect)firstRectForCharacterRange:(NSRange)theRange;
   - (unsigned int)characterIndexForPoint:(NSPoint)thePoint;
   - (NSArray*)validAttributesForMarkedText;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSTextStorageScripting* *Mac OS X 10.0*

This informal protocol declares methods for text storage classes to implement so that they may be scriptable. In the Application Kit, `NSTextStorage` implements all of the methods in this protocol as part of Cocoa's built-in support for scripting.

```
@interface NSObject (NSTextStorageScripting)
 // Instance Methods
   - (NSArray *)attributeRuns;
   - (void)setAttributeRuns:(NSArray *)attributeRuns;
   - (NSArray *)paragraphs;
   - (void)setParagraphs:(NSArray *)paragraphs;
   - (NSArray *)words;
   - (void)setWords:(NSArray *)words;
   - (NSArray *)characters;
   - (void)setCharacters:(NSArray *)characters;
   - (NSFont *)font;
   - (void)setFont:(NSFont *)font;
   - (NSColor *)foregroundColor;
   - (void)setForegroundColor:(NSColor *)color;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSToolbarItemValidation* *Mac OS X 10.0*

This informal protocol declares the method `validateToolbarItem:`, which allows targets of toolbar item actions to decide whether or not the toolbar item should be enabled. This method is similar in purpose and operation to the method `validaeMenuItem:`, which is found in the the `NSMenuValidation` protocol.

```
@interface NSObject (NSToolbarItemValidation)
 // Instance Methods
   - (BOOL)validateToolbarItem:(NSToolbarItem *)theItem;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSToolTipOwner* *Mac OS X 10.0*

This informal protocol declares a single method, `view:stringForToolTip:point:userData:`, which a cl tool-tip string to be displayed. For more information on tool tips, see the `NSView` and the `NSView` method `Rect:owner:userData:`.

```
@interface NSObject (NSToolTipOwner)
 // Instance Methods
   - (NSString *)view:(NSView *)view stringForToolTip:(NSToolTipTag)tag point:(NSPoint)
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## *NSUserInterfaceValidations* *Mac OS X 10.0*

This protocol, in conjunction with `NSValidatedUserInterfaceItem`, declares methods that classes implement to provide user interface object validation. This protocol declares the single method `validateUserInterfaceItem:`, which enables or disables interface objects based on the return value.

```
@protocol NSUserInterfaceValidations
 // Instance Methods
   - (BOOL)validateUserInterfaceItem:(id <NSValidatedUserInterfaceItem>)anItem;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSValidatedUserInterfaceItem — Mac OS X 10.0

Custom interface control objects may adopt this protocol to partake in the Application Kit's automated validation mechanism. User interface validation works by having user interface items, such as buttons or text fields, query the targets of their action about whether or not they should be enabled. This protocol is closely related to the `NSUserInterfaceItemValidations` protocol, which declares the method `validateUserInterfaceItem:` for target objects to implement.

```
@protocol NSValidatedUserInterfaceItem
 // Instance Methods
   - (SEL)action;
   - (int)tag;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## NSWindowScripting — Mac OS X 10.0

This informal protocol declares the methods that must be implemented by window classes in order to be scriptable. The methods of this protocol define an interface to setting and retrieving properties of the window, as well as to control operations such as saving, printing, and closing the window. NSWindow implements all of the methods in this protocol as part of Cocoa's built-in support for scripting.

```
@interface NSObject (NSWindowScripting)
 // Instance Methods
   - (BOOL)hasCloseBox;
   - (BOOL)hasTitleBar;
   - (BOOL)isFloatingPanel;
   - (BOOL)isModalPanel;
   - (BOOL)isResizable;
   - (BOOL)isZoomable;
   - (BOOL)isMiniaturizable;
   - (void)setIsZoomed:(BOOL)flag;
   - (void)setIsMiniaturized:(BOOL)flag;
   - (void)setIsVisible:(BOOL)flag;
   - (int)orderedIndex;
   - (void)setOrderedIndex:(int)index;
   - (id)handleSaveScriptCommand:(NSScriptCommand *)command;
   - (id)handleCloseScriptCommand:(NSCloseCommand *)command;
   - (id)handlePrintScriptCommand:(NSScriptCommand *)command;
@end
```



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Method Index

The following index allows you to look up a method and find the Cocoa class in which it is defined. Use this index when you want to look up a method but don't know its class.



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## A

abbreviation

NSTimeZone

abbreviationDictionary

NSTimeZone

abbreviationForDate:

NSTimeZone

abortEditing

NSControl

abortModal

NSApplication

absoluteString

NSURL

absoluteURL

NSURL

acceptConnectionInBackgroundAndNotify

NSFileHandle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

acceptConnectionInBackgroundAndNotifyForModes:

NSFileHandle

acceptInputForMode:beforeDate:

NSRunLoop

acceptableDragTypes

NSTextView

acceptsArrowKeys

NSBrowser

acceptsBinary

NSPrinter

acceptsFirstMouse:

NSSlider, NSMatrix, NSView

acceptsFirstResponder

NSResponder, NSTextField

acceptsGlyphInfo

NSTextView

acceptsMouseMovedEvents

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

accessoryView

NSSavePanel, NSPrintPanel, NSPrintOperation, NSFontPanel, NSSpellChecker, NSColorPanel, NSPageLayout, NSRulerView

action

NSControl, NSMenuItem, NSCell, NSFontManager, NSToolbarItem, NSActionCell, NSStatusItem

activate:

NSColorWell

activateContextHelpMode:

NSApplication

activateIgnoringOtherApps:

NSApplication

activeApplication

NSWorkspace

addAttribute:value:range:

NSMutableAttributedString

addAttributes:range:

NSMutableAttributedString

addCharactersInRange:

NSMutableCharacterSet

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

addCharactersInString:

NSMutableCharacterSet

addChildWindow:ordered:

NSWindow

addClient:

NSURLHandle

addClip

NSBezierPath

addColumn

NSMatrix, NSBrowser

addColumnWithCells:

NSMatrix

addConnection:toRunLoop:forMode:

NSPort

addCursorRect:cursor:

NSView

addDocument:

NSDocumentController

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

addEntriesFromDictionary:

NSMutableDictionary

addEntry:

NSForm

addFileWithPath:

NSFileWrapper

addFileWrapper:

NSFileWrapper

addFontTrait:

NSFontManager

addItem:

NSMenu

addItemWithObjectValue:

NSComboBoxCell, NSComboBox

addItemWithTitle:

NSPopUpButton, NSPopUpButtonCell

addItemWithTitle:action:keyEquivalent:

NSMenu

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

addItemsWithObjectValues:

NSComboBoxCell, NSComboBox

addItemsWithTitles:

NSPopUpButton, NSPopUpButtonCell

addLayoutManager:

NSTextStorage

addMarker:

NSRulerView

addObject:

NSAutoreleasePool, NSMutableArray, NSMutableSet, NSCountedSet

addObjectsFromArray:

NSMutableArray, NSMutableSet

addObserver:selector:name:object:

NSDistributedNotificationCenter, NSNotificationCenter

addObserver:selector:name:object:suspensionBehavior:

NSDistributedNotificationCenter

addPort:forMode:

NSRunLoop

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

addRegularFileWithContents:preferredFilename:

NSFileWrapper

addRepresentation:

NSImage

addRepresentations:

NSImage

addRequestMode:

NSConnection

addRow

NSMatrix

addRowWithCells:

NSMatrix

addRunLoop:

NSConnection

addSubview:

NSView

addSubview:positioned:relativeTo:

NSView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

addSuiteNamed:

NSUserDefaults

addSymbolicLinkWithDestination:preferredFilename:

NSFileWrapper

addTabStop:

NSMutableParagraphStyle

addTabViewItem:

NSTabView

addTableColumn:

NSTableView

addTemporaryAttributes:forCharacterRange:

NSLayoutManager

addTextContainer:

NSLayoutManager

addTimeInterval:

NSDate

addTimer:forMode:

NSRunLoop

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

addToolTipRect:owner:userData:

NSView

addTrackingRect:owner:userData:assumeInside:

NSView

addTypes:owner:

NSPasteboard

addWindowController:

NSDocument

addWindowsItem:title:filename:

NSApplication

address

NSHost, NSSocketPort

addresses

NSHost, NSNetService

adjustPageHeightNew:top:bottom:limit:

NSView

adjustPageWidthNew:left:right:limit:

NSView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

adjustScroll:

NSView

adjustSubviews

NSSplitView

advancementForGlyph:

NSFont

aeDesc

NSAppleEventDescriptor

aeteResource:

NSScriptSuiteRegistry

afmDictionary

NSFont

alignCenter:

NSText

alignJustified:

NSTextView

alignLeft:

NSText

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

alignRight:

NSText

alignment

NSParagraphStyle, NSControl, NSCell, NSText

allBundles

NSBundle

allConnections

NSConnection

allFrameworks

NSBundle

allKeys

NSDictionary, NSColorList

allKeysForObject:

NSDictionary

allObjects

NSSet, NSEnumerator

allValues

NSDictionary

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

alloc

NSObject, NSProxy

allocWithZone:

NSObject, NSPort, NSProxy

allocateGState

NSView

allowsBranchSelection

NSBrowser

allowsColumnReordering

NSTableView

allowsColumnResizing

NSTableView

allowsColumnSelection

NSTableView

allowsDuplicatesInToolbar

NSToolbarItem

allowsEditingTextAttributes

NSCell, NSTextField

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

allowsEmptySelection

NSTableView, NSMatrix, NSBrowser

allowsFloats

NSNumberFormatter

allowsKeyedCoding

NSCoder

allowsMixedState

NSCell, NSButton

allowsMultipleSelection

NSOpenPanel, NSTableView, NSBrowser

allowsNaturalLanguage

NSDateFormatter

allowsTickMarkValuesOnly

NSSliderCell

allowsTruncatedLabels

NSTabView

allowsUndo

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

allowsUserCustomization

NSToolbar

alpha

NSColorPanel

alphaComponent

NSColor

alphaValue

NSWindow

alphanumericCharacterSet

NSCharacterSet

altIncrementValue

NSSlider, NSSliderCell

alternateImage

NSBrowserCell, NSButtonCell, NSButton

alternateSelectedControlColor

NSColor

alternateSelectedControlTextColor

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

alternateTitle

NSButtonCell, NSButton

altersStateOfSelectedItem

NSPopUpButtonCell

ancestorSharedWithView:

NSView

animate:

NSProgressIndicator

animationDelay

NSProgressIndicator

animationResizeTime:

NSWindow

anyObject

NSSet

appendAttributedString:

NSMutableAttributedString

appendBezierPath:

NSBezierPath

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

appendBezierPathWithArcFromPoint:

NSBezierPath

appendBezierPathWithArcWithCenter:radius:

NSBezierPath

appendBezierPathWithGlyph:inFont:

NSBezierPath

appendBezierPathWithGlyphs:count:

NSBezierPath

appendBezierPathWithOvalInRect:

NSBezierPath

appendBezierPathWithPackedGlyphs:

NSBezierPath

appendBezierPathWithPoints:count:

NSBezierPath

appendBezierPathWithRect:

NSBezierPath

appendBytes:length:

NSMutableData

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

appendData:

NSMutableData

appendFormat:...

NSMutableString

appendString:

NSMutableString

appendTransform:

NSAffineTransform

appleEventClassCode

NSScriptCommandDescription

appleEventCode

NSScriptClassDescription, NSScriptCommandDescription

appleEventCodeForArgumentWithName:

NSScriptCommandDescription

appleEventCodeForKey:

NSScriptClassDescription

appleEventCodeForReturnType

NSScriptCommandDescription

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

appleEventCodeForSuite:

NSScriptSuiteRegistry

appleEventWithEventClass:eventID:targetDescriptor:returnID:transactionID:

NSAppleEventDescriptor

application:delegateHandlesKey:

NSApplication

application:openFile:

NSApplication

application:openFileWithoutUI:

NSApplication

application:openTempFile:

NSApplication

application:printFile:

NSApplication

applicationDidBecomeActive:

NSApplication

applicationDidChangeScreenParameters:

NSApplication

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

applicationDidFinishLaunching:

NSApplication

applicationDidHide:

NSApplication

applicationDidResignActive:

NSApplication

applicationDidUnhide:

NSApplication

applicationDidUpdate:

NSApplication

applicationDockMenu:

NSApplication

applicationIconImage

NSApplication

applicationOpenUntitledFile:

NSApplication

applicationShouldHandleReopen:hasVisibleWindows:

NSApplication

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

applicationShouldOpenUntitledFile:

NSApplication

applicationShouldTerminate:

NSApplication

applicationShouldTerminateAfterLastWindowClosed:

NSApplication

applicationWillBecomeActive:

NSApplication

applicationWillFinishLaunching:

NSApplication

applicationWillHide:

NSApplication

applicationWillResignActive:

NSApplication

applicationWillTerminate:

NSApplication

applicationWillUnhide:

NSApplication

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

applicationWillUpdate:

NSApplication

applyFontTraits:range:

NSMutableAttributedString

archiveRootObject:toFile:

NSKeyedArchiver, NSArchiver

archivedDataWithRootObject:

NSKeyedArchiver, NSArchiver

archiver:didEncodeObject:

NSKeyedArchiver

archiver:willEncodeObject:

NSKeyedArchiver

archiver:willReplaceObject:withObject:

NSKeyedArchiver

archiverData

NSArchiver

archiverDidFinish:

NSKeyedArchiver

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

archiverWillFinish:

NSKeyedArchiver

areCursorRectsEnabled

NSWindow

argumentNames

NSScriptCommandDescription

arguments

NSProcessInfo, NSTask, NSScriptCommand

argumentsRetained

NSInvocation

arrangeInFront:

NSApplication

array

NSArray

arrayByAddingObject:

NSArray

arrayByAddingObjectsFromArray:

NSArray

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

arrayForKey:

NSUserDefaults

arrayWithArray:

NSArray

arrayWithCapacity:

NSMutableArray

arrayWithContentsOfFile:

NSArray

arrayWithContentsOfURL:

NSArray

arrayWithObject:

NSArray

arrayWithObjects:...

NSArray

arrayWithObjects:count:

NSArray

arrowCursor

NSCursor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

arrowPosition

NSPopUpButtonCell

arrowsPosition

NSScroller

ascender

NSFont

aspectRatio

NSWindow

attachColorList:

NSColorPicker, NSColorPanel

attachPopUpWithFrame:inView:

NSPopUpButtonCell

attachSubmenuForItemAtIndex:

NSMenuView

attachedMenu

NSMenu, NSMenuView

attachedMenuView

NSMenuView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

attachedSheet

NSWindow

attachmentCell

NSTextAttachment

attachmentSizeForGlyphAtIndex:

NSLayoutManager

attribute:atIndex:effectiveRange:

NSAttributedString

attribute:atIndex:longestEffectiveRange: inRange:

NSAttributedString

attributeDescriptorForKeyword:

NSAppleEventDescriptor

attributeKeys

NSClassDescription

attributeRuns

NSTextStorage

attributedAlternateTitle

NSButtonCell, NSButton

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

attributedStringForNil

NSNumberFormatter

attributedStringForNotANumber

NSNumberFormatter

attributedStringForObjectValue:withDefaultAttributes:

NSFormatter

attributedStringForZero

NSNumberFormatter

attributedStringValue

NSControl, NSCell

attributedStringWithAttachment:

NSAttributedString

attributedSubstringFromRange:

NSAttributedString

attributedTitle

NSButtonCell, NSFormCell, NSButton, NSStatusItem

attributes

NSGraphicsContext, NSOpenGLPixelFormat

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

attributesAtIndex:effectiveRange:

NSAttributedString

attributesAtIndex:longestEffectiveRange: inRange:

NSAttributedString

authenticateComponents:withData:

NSConnection

authenticationDataForComponents:

NSConnection

autoenablesItems

NSPopUpButton, NSPopUpButtonCell, NSMenu

autoreleasedObjectCount

NSAutoreleasePool

autorepeat

NSStepperCell, NSStepper

autoresizesAllColumnsToFit

NSTableView

autoresizesOutlineColumn

NSOutlineView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

autoresizesSubviews

NSView

autoresizingMask

NSView

autosaveExpandedItems

NSOutlineView

autosaveName

NSTableView

autosaveTableColumns

NSTableView

autosavesConfiguration

NSToolbar

autoscroll: NSClipView,

NSView

autosizesCells

NSMatrix

availableColorLists

NSColorList

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

availableData

NSFileHandle

availableFontFamilies

NSFontManager

availableFontNamesWithTraits:

NSFontManager

availableFonts

NSFontManager

availableMembersOfFontFamily:

NSFontManager

availableResourceData

NSURLHandle

availableStringEncodings

NSString

availableTypeFromArray:

NSPasteboard

awakeAfterUsingCoder:

NSObject

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## B

backgroundColor

NSImage, NSWindow, NSTextFieldCell, NSTableView, NSTextView, NSScrollView, NSClipView, NSMatrix, NSTextField, NSText

backgroundLayoutEnabled

NSLayoutManager

backgroundLoadDidFailWithReason:

NSURLHandle

backingType

NSWindow

baseOfTypesetterGlyphInfo

NSSimpleHorizontalTypesetter

baseSpecifier

NSRelativeSpecifier

baseURL

NSURL

baseWritingDirection

NSParagraphStyle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

baselineLocation

NSRulerView

baselineOffsetInLayoutManager:glyphIndex:

NSTypesetter

becomeFirstResponder

NSResponder, NSTextView

becomeKeyWindow

NSWindow

becomeMainWindow

NSWindow

becomesKeyOnlyIfNeeded

NSPanel

beginDocument

NSView

beginEditing

NSMutableAttributedString

beginLoadInBackground

NSURLHandle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

beginModalSessionForWindow:

NSApplication

beginModalSessionForWindow:relativeToWindow:

NSApplication

beginPageInRect:atPlacement:

NSView

beginSheet:modalForWindow:modalDelegate:didEndSelector:contextInfo:

NSApplication

beginSheetForDirectory:file:modalForWindow:modalDelegate:didEndSelector:
contextInfo:

NSSavePanel

beginSheetForDirectory:file:types:modalForWindow:modalDelegate:didEndSelector:con-
textInfo:

NSOpenPanel

beginSheetWithPrintInfo:modalForWindow: delegate:didEndSelector:contextInfo:

NSPrintPanel, NSPageLayout

beginUndoGrouping

NSUndoManager

bestRepresentationForDevice:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSImage

bezelStyle

NSTextFieldCell, NSButtonCell, NSButton, NSTextField

bezierPath

NSBezierPath

bezierPathByFlatteningPath

NSBezierPath

bezierPathByReversingPath

NSBezierPath

bezierPathWithOvalInRect:

NSBezierPath

bezierPathWithRect:

NSBezierPath

bitmapData

NSBitmapImageRep

bitmapRepresentation

NSCharacterSet

bitsPerPixel

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSBitmapImageRep

bitsPerSample

NSImageRep

blackColor

NSColor

blackComponent

NSColor

blendedColorWithFraction:ofColor:

NSColor

blueColor

NSColor

blueComponent

NSColor

boldSystemFontOfSize:

NSFont

boolForKey:

NSUserDefaults

boolValue

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSNumber

booleanForKey:inTable:

NSPrinter

booleanValue

NSAppleEventDescriptor

borderRect

NSBox

borderType

NSBox, NSScrollView

bottomMargin

NSPrintInfo

boundingBox

NSEPSImageRep, NSPICTImageRep

boundingRectForFont

NSFont

boundingRectForGlyph:

NSFont

boundingRectForGlyphRange:inTextContainer:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSLayoutManager

bounds

NSPDFImageRep, NSBezierPath, NSView

boundsRotation

NSView

boxType

NSBox

branchImage

NSBrowserCell

breakLineAtIndex:

NSSimpleHorizontalTypesetter

breakLock

NSDistributedLock

brightnessComponent

NSColor

brownColor

NSColor

browser:createRowsForColumn:inMatrix:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSBrowser

browser:isColumnValid:

NSBrowser

browser:numberOfRowsInColumn:

NSBrowser

browser:selectCellWithString:inColumn:

NSBrowser

browser:selectRow:inColumn:

NSBrowser

browser:titleOfColumn:

NSBrowser

browser:willDisplayCell:atRow:column:

NSBrowser

browserDidScroll:

NSBrowser

browserWillScroll:

NSBrowser

builtInPlugInsPath

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSBundle

bundleForClass:

NSBundle

bundleForSuite:

NSScriptSuiteRegistry

bundleIdentifier

NSBundle

bundlePath

NSBundle

bundleWithIdentifier:

NSBundle

bundleWithPath:

NSBundle

buttonNumber

NSEvent

bytes

NSData

bytesPerPlane

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSBitmapImageRep

bytesPerRow

NSBitmapImageRep

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## C

cString

NSString

cStringLength

NSString

cacheDepthMatchesImageDepth

NSImage

cacheImageInRect:

NSWindow

cacheMode

NSImage

cachedHandleForURL:

NSURLHandle

cachesBezierPath

NSBezierPath

calcDrawInfo:

NSCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

calcSize

NSControl, NSMenuItemCell

calendarDate

NSCalendarDate

calendarFormat

NSCalendarDate

canBeCompressedUsing:

NSBitmapImageRep

canBeConvertedToEncoding:

NSString

canBecomeKeyWindow

NSWindow

canBecomeMainWindow

NSWindow

canChooseDirectories

NSOpenPanel

canChooseFiles

NSOpenPanel

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

canCloseDocument

NSDocument

canCloseDocumentWithDelegate:shouldCloseSelector:contextInfo:

NSDocument

canDraw

NSView

canHide

NSWindow

canInitWithData:

NSImageRep

canInitWithPasteboard:

NSImage, NSSound, NSMovie, NSImageRep

canInitWithURL:

NSURLHandle

canRedo

NSUndoManager

canSpawnSeparateThread

NSPrintOperation

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

canStoreColor

NSWindow

canUndo

NSUndoManager

cancel:

NSSavePanel

cancelIncrementalLoad

NSImage

cancelLoadInBackground

NSURLHandle

cancelPerformSelector:target:argument:

NSRunLoop

cancelPerformSelectorsWithTarget:

NSRunLoop

cancelUserAttentionRequest:

NSApplication

capHeight

NSFont

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

capacityOfTypesetterGlyphInfo

NSSimpleHorizontalTypesetter

capitalizeWord:

NSResponder

capitalizedLetterCharacterSet

NSCharacterSet

capitalizedString

NSString

cascadeTopLeftFromPoint:

NSWindow

caseInsensitiveCompare:

NSString

caseSensitive

NSScanner

catalogNameComponent

NSColor

cell

NSControl

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

cellAtIndex:

NSForm

cellAtRow:column:

NSMatrix

cellAttribute:

NSCell

cellBackgroundColor

NSMatrix

cellClass

NSControl, NSMatrix, NSBrowser

cellFrameAtRow:column:

NSMatrix

cellPrototype

NSBrowser

cellSize

NSCell, NSMatrix

cellSizeForBounds:

NSCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

cellWithTag:

NSMatrix

cells

NSMatrix

center

NSWindow

centerScanRect:

NSView

centerSelectionInVisibleArea:

NSResponder

changeCaseOfLetter:

NSResponder

changeColor:

NSTextView, NSApplication

changeCount

NSPasteboard

changeCurrentDirectoryPath:

NSFileManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

changeFileAttributes:atPath:

NSFileManager

changeFont:

NSFontManager, NSText

changeInLength

NSTextStorage

changeWindowsItem:title:filename:

NSApplication

charValue

NSNumber

characterAtIndex:

NSString

characterCollection

NSGlyphInfo

characterIdentifier

NSGlyphInfo

characterIndexForGlyphAtIndex:

NSLayoutManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

characterIsMember:

NSCharacterSet

characterRangeForGlyphRange:actualGlyphRange:

NSLayoutManager

characterSetWithBitmapRepresentation:

NSCharacterSet

characterSetWithCharactersInString:

NSCharacterSet

characterSetWithContentsOfFile:

NSCharacterSet

characterSetWithRange:

NSCharacterSet

characters

NSTextStorage, NSEvent

charactersIgnoringModifiers

NSEvent

charactersToBeSkipped

NSScanner

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

checkForRemovableMedia

NSWorkspace

checkSpaceForParts

NSScroller

checkSpelling:

NSText

checkSpellingOfString:startingAt:

NSSpellChecker

checkSpellingOfString:startingAt:lang-uage:wrap:inSpellDocumentWithTag:wordCount:

NSSpellChecker

childSpecifier

NSScriptObjectSpecifier

childWindows

NSWindow

class

NSObject, NSProxy

classCode

NSObject

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

classDescription

NSClassDescription

classDescriptionForClass:

NSClassDescription

classDescriptionForKey:

NSScriptClassDescription

classDescriptionWithAppleEventCode:

NSScriptSuiteRegistry

classDescriptionsInSuite:

NSScriptSuiteRegistry

classForArchiver

NSObject

classForClassName:

NSKeyedUnarchiver

classForCoder

NSObject

classForKeyedArchiver

NSObject

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

classForPortCoder

NSObject

className

NSScriptClassDescription, NSObject

classNameDecodedForArchiveClassName:

NSUnarchiver

classNameEncodedForTrueClassName:

NSArchiver

classNameForClass:

NSKeyedArchiver

classNamed:

NSBundle

cleanUpAfterDragOperation

NSTextView

cleanUpOperation

NSPrintOperation

clear:

NSMovieView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

clearAttributesCache

NSSimpleHorizontalTypesetter

clearColor

NSColor

clearCurrentContext

NSOpenGLContext

clearDrawable

NSOpenGLContext

clearGLContext

NSOpenGLView

clearGlyphCache

NSSimpleHorizontalTypesetter

clearRecentDocuments:

NSDocumentController

clickCount

NSEvent

clickedColumn

NSTableView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

clickedOnLink:atIndex:

NSTextView

clickedRow

NSTableView

clientView

NSRulerView

clipRect:

NSBezierPath

close

NSWindow, NSDrawer, NSWindowController, NSDocument

close:

NSDrawer

closeAllDocuments

NSDocumentController

closeAllDocumentsWithDelegate:didCloseAllSelector:contextInfo:

NSDocumentController

closeFile

NSFileHandle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

closePath

NSBezierPath

closeSpellDocumentWithTag:

NSSpellChecker

closestTickMarkValueToValue:

NSSliderCell

coerceToDescriptorType:

NSAppleEventDescriptor

coerceValue:toClass:

NSScriptCoercionHandler

collapseItem:

NSOutlineView

collapseItem:collapseChildren:

NSOutlineView

color

NSTabViewItem, NSColorWell, NSColorPanel

colorForControlTint:

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

colorFromPasteboard:

NSColor

colorListNamed:

NSColorList

colorNameComponent

NSColor

colorPanel

NSColorPicker

colorSpaceName

NSColor, NSImageRep

colorUsingColorSpaceName:

NSColor

colorUsingColorSpaceName:device:

NSColor

colorWithAlphaComponent:

NSColor

colorWithCalibratedHue:saturation:brightness:alpha:

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

colorWithCalibratedRed:green:blue:alpha:

NSColor

colorWithCalibratedWhite:alpha:

NSColor

colorWithCatalogName:colorName:

NSColor

colorWithDeviceCyan:magenta:yellow: black:alpha:

NSColor

colorWithDeviceHue:saturation:brightness: alpha:

NSColor

colorWithDeviceRed:green:blue:alpha:

NSColor

colorWithDeviceWhite:alpha:

NSColor

colorWithKey:

NSColorList

colorWithPatternImage:

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

colorizeByMappingGray:toColor:blackMapping:whiteMapping:

NSBitmapImageRep

columnAtPoint:

NSTableView, NSTableHeaderView

columnOfMatrix:

NSBrowser

columnWithIdentifier:

NSTableView

columnsInRect:

NSTableView

comboBoxSelectionDidChange:

NSComboBox

comboBoxSelectionIsChanging:

NSComboBox

comboBoxWillDismiss:

NSComboBox

comboBoxWillPopUp:

NSComboBox

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

commandClassName

NSScriptCommandDescription

commandDescription

NSScriptCommand

commandDescriptionWithAppleEventClass:andAppleEventCode:

NSScriptSuiteRegistry

commandDescriptionsInSuite:

NSScriptSuiteRegistry

commandName

NSScriptCommandDescription

commonPrefixWithString:options:

NSString

compare:

NSString, NSDecimalNumber, NSCell, NSNumber, NSDate

compare:options:

NSString

compare:options:range:

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

compare:options:range:locale:

NSString

compileAndReturnError:

NSAppleScript

complete:

NSResponder

completePathIntoString:caseSensitive:matchesIntoArray:filterTypes:

NSString

completedString:

NSComboBoxCell

completes

NSComboBoxCell, NSComboBox

components

NSPortMessage

componentsJoinedByString:

NSArray

componentsSeparatedByString:

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

componentsToDisplayForPath:

NSFileManager

compositeToPoint:fromRect:operation:

NSImage

compositeToPoint:fromRect:operation:fraction:

NSImage

compositeToPoint:operation:

NSImage

compositeToPoint:operation:fraction:

NSImage

concat

NSAffineTransform

condition

NSConditionLock

configurationDictionary

NSToolbar

configureAsServer

NSRunLoop

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

conformsToProtocol:

NSObject

connection

NSDistantObjectRequest, NSPortCoder

connection:handleRequest:

NSConnection

connection:shouldMakeNewConnection:

NSConnection

connectionForProxy

NSDistantObject

connectionWithReceivePort:sendPort:

NSConnection

connectionWithRegisteredName:host:

NSConnection

connectionWithRegisteredName:host:usingNameServer:

NSConnection

constrainFrameRect:toScreen:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

constrainScrollPoint:

NSClipView

containerClassDescription

NSScriptObjectSpecifier

containerIsObjectBeingTested

NSScriptObjectSpecifier

containerIsRangeContainerObject

NSScriptObjectSpecifier

containerSize

NSTextContainer

containerSpecifier

NSScriptObjectSpecifier

containsAttachments

NSAttributedString

containsObject:

NSSet, NSArray

containsPoint:

NSBezierPath, NSTextContainer

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

containsValueForKey:

NSKeyedUnarchiver, NSCoder

contentRect

NSTabView

contentRectForFrameRect:styleMask:

NSWindow

contentSize

NSScrollView, NSDrawer

contentSizeForFrameSize:hasHorizontalScroller:hasVerticalScroller:borderType:

NSScrollView

contentView

NSWindow, NSBox, NSScrollView, NSDrawer

contentViewMargins

NSBox

contentsAtPath:

NSFileManager

contentsEqualAtPath:andPath:

NSFileManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

context

NSPrintOperation, NSApplication, NSEvent

contextHelpForKey:

NSBundle

contextHelpForObject:

NSHelpManager

contextMenuRepresentation

NSMenu

continueTracking:at:inView:

NSCell

control:didFailToFormatString:errorDescription:

NSControl

control:didFailToValidatePartialString:errorDescription:

NSControl

control:isValidObject:

NSControl

control:textShouldBeginEditing:

NSControl

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

control:textShouldEndEditing:

NSControl

control:textView:doCommandBySelector:

NSControl

controlBackgroundColor

NSColor

controlCharacterSet

NSCharacterSet

controlColor

NSColor

controlContentFontOfSize:

NSFont

controlDarkShadowColor

NSColor

controlHighlightColor

NSColor

controlLightHighlightColor

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

controlPointBounds

NSBezierPath

controlShadowColor

NSColor

controlSize

NSProgressIndicator, NSCell, NSTabView, NSScroller

controlTextColor

NSColor

controlTextDidBeginEditing:

NSControl

controlTextDidChange:

NSControl

controlTextDidEndEditing:

NSControl

controlTint

NSProgressIndicator, NSCell, NSTabView, NSScroller

controlView

NSCell, NSActionCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

conversation

NSDistantObjectRequest

convertBaseToScreen:

NSWindow

convertFont:

NSFontManager

convertFont:toFace:

NSFontManager

convertFont:toFamily:

NSFontManager

convertFont:toHaveTrait:

NSFontManager

convertFont:toNotHaveTrait:

NSFontManager

convertFont:toSize:

NSFontManager

convertOldFactor:newFactor:

NSPageLayout

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

convertPoint:fromView:

NSView

convertPoint:toView:

NSView

convertRect:fromView:

NSView

convertRect:toView:

NSView

convertScreenToBase:

NSWindow

convertSize:fromView:

NSView

convertSize:toView:

NSView

convertWeight:ofFont:

NSFontManager

copiesOnScroll

NSClipView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

copy

NSObject

copy:

NSMovieView, NSText

copyAttributesFromContext:withMask:

NSOpenGLContext

copyFont:

NSText

copyPath:toPath:handler:

NSFileManager

copyRuler:

NSText

copyWithZone:

NSObject

cornerView

NSTableView

count

NSDictionary, NSSet, NSArray

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

countForObject:

NSCountedSet

countWordsInString:language:

NSSpellChecker

coveredCharacterSet

NSFont

createClassDescription

NSCreateCommand

createCommandInstance

NSScriptCommandDescription

createCommandInstanceWithZone:

NSScriptCommandDescription

createContext

NSPrintOperation

createConversationForConnection:

NSConnection

createDirectoryAtPath:attributes:

NSFileManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

createFileAtPath:contents:attributes:

NSFileManager

createSymbolicLinkAtPath:pathContent:

NSFileManager

createTexture:fromView:internalFormat:

NSOpenGLContext

currentContainer

NSSimpleHorizontalTypesetter

currentContext

NSGraphicsContext, NSOpenGLContext

currentContextDrawingToScreen

NSGraphicsContext

currentConversation

NSConnection

currentCursor

NSCursor

currentDirectory

NSDocumentController

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

currentDirectoryPath

NSTask, NSFileManager

currentDocument

NSDocumentController

currentEditor

NSControl

currentEvent

NSWindow, NSApplication

currentHandler

NSAssertionHandler

currentHost

NSHost

currentInputManager

NSInputManager

currentLayoutManager

NSSimpleHorizontalTypesetter

currentMode

NSRunLoop

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

currentOperation

NSPrintOperation

currentPage

NSPrintOperation, NSPDFImageRep

currentParagraphStyle

NSSimpleHorizontalTypesetter

currentPoint

NSBezierPath

currentRunLoop

NSRunLoop

currentTextStorage

NSSimpleHorizontalTypesetter

currentThread

NSThread

currentVirtualScreen

NSOpenGLContext

curveToPoint:

NSBezierPath

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

customizationPaletteIsRunning

NSToolbar

cut:

NSMovieView, NSText

cyanColor

NSColor

cyanComponent

NSColor

cycleToNextInputLanguage:

NSInputManager

cycleToNextInputServerInLanguage:

NSInputManager

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## D

darkGrayColor

NSColor

data

NSData, NSTimeZone, NSAppleEventDescriptor

data1

NSEvent

data2

NSEvent

dataCell

NSTableColumn

dataCellForRow:

NSTableColumn

dataForKey:

NSUserDefaults

dataForType:

NSPasteboard

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

dataFromPropertyList:format:errorDescription:

NSPropertyListSerialization

dataRepresentationOfType:

NSDocument

dataSource

NSTableView, NSComboBoxCell, NSComboBox

dataUsingEncoding:

NSString

dataUsingEncoding:allowLossyConversion:

NSString

dataWithBytes:length:

NSData

dataWithBytesNoCopy:length:

NSData

dataWithBytesNoCopy:length: freeWhenDone:

NSData

dataWithCapacity:

NSMutableData

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

dataWithContentsOfFile:

NSData

dataWithContentsOfMappedFile:

NSData

dataWithContentsOfURL:

NSData

dataWithData:

NSData

dataWithEPSInsideRect:

NSWindow, NSView

dataWithLength:

NSMutableData

dataWithPDFInsideRect:

NSWindow, NSView

date

NSDate

dateByAddingYears:months:days:hours:minutes:seconds:

NSCalendarDate

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

dateFormat

NSDateFormatter

dateWithCalendarFormat:timeZone:

NSDate

dateWithNaturalLanguageString:

NSDate

dateWithNaturalLanguageString:locale:

NSDate

dateWithString:

NSDate

dateWithString:calendarFormat:

NSCalendarDate

dateWithString:calendarFormat:locale:

NSCalendarDate

dateWithTimeIntervalSince1970:

NSDate

dateWithTimeIntervalSinceNow:

NSDate

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

dateWithTimeIntervalSinceReferenceDate:

NSDate

dateWithYear:month:day:hour:minute:second:timeZone:

NSCalendarDate

dayOfCommonEra

NSCalendarDate

dayOfMonth

NSCalendarDate

dayOfWeek

NSCalendarDate

dayOfYear

NSCalendarDate

deactivate

NSApplication, NSColorWell

dealloc

NSObject, NSProxy

decimalDigitCharacterSet

NSCharacterSet

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

decimalNumberByAdding:

NSDecimalNumber

decimalNumberByAdding:withBehavior:

NSDecimalNumber

decimalNumberByDividingBy:

NSDecimalNumber

decimalNumberByDividingBy:withBehavior:

NSDecimalNumber

decimalNumberByMultiplyingBy:

NSDecimalNumber

decimalNumberByMultiplyingBy:withBehavior:

NSDecimalNumber

decimalNumberByMultiplyingByPowerOf10:

NSDecimalNumber

decimalNumberByMultiplyingByPowerOf10:withBehavior:

NSDecimalNumber

decimalNumberByRaisingToPower:

NSDecimalNumber

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

decimalNumberByRaisingToPower:withBehavior:

NSDecimalNumber

decimalNumberByRoundingAccordingToBehavior:

NSDecimalNumber

decimalNumberBySubtracting:

NSDecimalNumber

decimalNumberBySubtracting:withBehavior:

NSDecimalNumber

decimalNumberHandlerWithRoundingMode:scale:raiseOnExactness:raiseOnOverflow:raiseOn

NSDecimalNumberHandler

decimalNumberWithDecimal:

NSDecimalNumber

decimalNumberWithMantissa:exponent:isNegative:

NSDecimalNumber

decimalNumberWithString:

NSDecimalNumber

decimalNumberWithString:locale:

NSDecimalNumber

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

decimalSeparator

NSNumberFormatter

decimalValue

NSDecimalNumber, NSNumber

declareTypes:owner:

NSPasteboard

decodeArrayOfObjCType:count:at:

NSCoder

decodeBoolForKey:

NSKeyedUnarchiver, NSCoder

decodeBytesForKey:returnedLength:

NSKeyedUnarchiver, NSCoder

decodeBytesWithReturnedLength:

NSCoder

decodeClassName:asClassName:

NSUnarchiver, NSUnarchiver

decodeDataObject

NSCoder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

decodeDoubleForKey:

NSKeyedUnarchiver, NSCoder

decodeFloatForKey:

NSKeyedUnarchiver, NSCoder

decodeInt32ForKey:

NSKeyedUnarchiver, NSCoder

decodeInt64ForKey:

NSKeyedUnarchiver, NSCoder

decodeIntForKey:

NSKeyedUnarchiver, NSCoder

decodeNXColor

NSCoder

decodeNXObject

NSCoder

decodeObject

NSCoder

decodeObjectForKey:

NSKeyedUnarchiver, NSCoder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

decodePoint

NSCoder

decodePointForKey:

NSCoder

decodePortObject

NSPortCoder

decodePropertyList

NSCoder

decodeRect

NSCoder

decodeRectForKey:

NSCoder

decodeSize

NSCoder

decodeSizeForKey:

NSCoder

decodeValueOfObjCType:at:

NSCoder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

decodeValuesOfObjCTypes:...

NSCoder

decomposableCharacterSet

NSCharacterSet

decomposedStringWithCanonicalMapping

NSString

decomposedStringWithCompatibilityMapping

NSString

deepestScreen

NSScreen, NSWindow

defaultAttachmentScaling

NSLayoutManager

defaultBehavior

NSDecimalNumber

defaultButtonCell

NSWindow

defaultCStringEncoding

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

defaultCenter

NSDistributedNotificationCenter, NSNotificationCenter

defaultConnection

NSConnection

defaultDecimalNumberHandler

NSDecimalNumberHandler

defaultDepthLimit

NSWindow

defaultFlatness

NSBezierPath

defaultLineCapStyle

NSBezierPath

defaultLineHeightForFont

NSFont

defaultLineHeightForFont:

NSLayoutManager

defaultLineJoinStyle

NSBezierPath

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

defaultLineWidth

NSBezierPath

defaultManager

NSFileManager

defaultMenu

NSCell, NSView

defaultMiterLimit

NSBezierPath

defaultNameServerPortNumber

NSSocketPortNameServer

defaultParagraphStyle

NSParagraphStyle

defaultPixelFormat

NSOpenGLView

defaultPrinter

NSPrintInfo

defaultQueue

NSNotificationQueue

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

defaultSubcontainerAttributeKey

NSScriptClassDescription

defaultTimeZone

NSTimeZone

defaultTypesetterBehavior

NSTypesetter

defaultWindingRule

NSBezierPath

defaultWritingDirectionForLanguage:

NSParagraphStyle

delegate

NSImage, NSTextStorage, NSWindow, NSTableView, NSSound, NSKeyedUnarchiver, NSNetServic
NSNetService, NSLayoutManager, NSFontManager, NSDrawer, NSMatrix, NSApplication, NSCustor
NSToolbar, NSKeyedArchiver, NSTabView, NSBrowser, NSConnection, NSTextField, NSText

delete:

NSText

deleteBackward:

NSResponder

deleteCharactersInRange:

NSMutableString, NSMutableAttributedString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

deleteForward:

NSResponder

deleteGlyphsInRange:

NSLayoutManager

deleteToBeginningOfLine:

NSResponder

deleteToBeginningOfParagraph:

NSResponder

deleteToEndOfLine:

NSResponder

deleteToEndOfParagraph:

NSResponder

deleteToMark:

NSResponder

NSResponder

deleteWordBackward:

NSResponder

deleteWordForward:

NSResponder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

deliverResult

NSPrintOperation

deltaX

NSEvent

deltaY

NSEvent

deltaZ

NSEvent

deminiaturize:

NSWindow

depth

NSScreen

depthLimit

NSWindow

dequeueNotificationsMatching:coalesceMask:

NSNotificationQueue

descender

NSFont

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

description

NSString, NSData, NSDictionary, NSTimeZone, NSObject, NSSet, NSArray, NSCalendarDate, NSD

descriptionInStringsFileFormat

NSDictionary

descriptionWithCalendarFormat:

NSCalendarDate

descriptionWithCalendarFormat:locale:

NSCalendarDate

descriptionWithCalendarFormat:timeZone:locale:

NSDate

descriptionWithLocale:

NSDictionary, NSDecimalNumber, NSSet, NSArray, NSNumber, NSCalendarDate, NSDate

descriptionWithLocale:indent:

NSDictionary, NSArray

descriptorAtIndex:

NSAppleEventDescriptor

descriptorForKeyword:

NSAppleEventDescriptor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

descriptorType

NSAppleEventDescriptor

descriptorWithBoolean:

NSAppleEventDescriptor

descriptorWithDescriptorType:bytes:length:

NSAppleEventDescriptor

descriptorWithDescriptorType:data:

NSAppleEventDescriptor

descriptorWithEnumCode:

NSAppleEventDescriptor

descriptorWithInt32:

NSAppleEventDescriptor

descriptorWithString:

NSAppleEventDescriptor

descriptorWithTypeCode:

NSAppleEventDescriptor

deselectAll:

NSTableView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

deselectAllCells

NSMatrix

deselectColumn:

NSTableView

deselectItemAtIndex:

NSComboBoxCell, NSComboBox

deselectRow:

NSTableView

deselectSelectedCell

NSMatrix

deserializeAlignedBytesLengthAtCursor:

NSData

deserializeBytes:length:atCursor:

NSData

deserializeDataAt:ofObjCType:atCursor:context:

NSData

deserializeIntAtCursor:

NSData

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

deserializeIntAtIndex:

NSData

deserializeInts:count:atCursor:

NSData

deserializeInts:count:atIndex:

NSData

deserializePropertyListFromData:atCursor:mutableContainers:

NSDeserializer

deserializePropertyListFromData:mutableContainers:

NSDeserializer

deserializePropertyListLazilyFromData:atCursor:length:mutableContainers:

NSDeserializer

destination

NSNibConnector

destroyContext

NSPrintOperation

detachColorList:

NSColorPicker, NSColorPanel

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

detachDrawingThread:toTarget:withObject:

NSApplication

detachNewThreadSelector:toTarget:withObject:

NSThread

detachSubmenu

NSMenuView

developmentLocalization

NSBundle

deviceDescription

NSScreen, NSWindow, NSPrinter

dictionary

NSDictionary, NSPrintInfo

dictionaryForKey:

NSUserDefaults

dictionaryRepresentation

NSUserDefaults

dictionaryWithCapacity:

NSMutableDictionary

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

dictionaryWithContentsOfFile:

NSDictionary

dictionaryWithContentsOfURL:

NSDictionary

dictionaryWithDictionary:

NSDictionary

dictionaryWithObject:forKey:

NSDictionary

dictionaryWithObjects:forKeys:

NSDictionary

dictionaryWithObjects:forKeys:count:

NSDictionary

dictionaryWithObjectsAndKeys:...

NSDictionary

didAddSubview:

NSView

didChangeText

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

didLoadBytes:loadComplete:

NSURLHandle

directParameter

NSScriptCommand

directory

NSSavePanel

directoryAttributes

NSDirectoryEnumerator

directoryContentsAtPath:

NSFileManager

disableCursorRects

NSWindow

disableFlushWindow

NSWindow

disableKeyEquivalentForDefaultButtonCell

NSWindow

disableUndoRegistration

NSUndoManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

disabledControlTextColor

NSColor

discardCachedImage

NSWindow

discardCursorRects

NSWindow, NSView

discardEventsMatchingMask:beforeEvent:

NSWindow, NSApplication

dismissPopUp

NSPopUpButtonCell

dispatch

NSPortCoder

dispatchRawAppleEvent:withRawReply:handlerRefCon:

NSAppleEventManager

display

NSWindow, NSView

displayAllColumns

NSBrowser

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

displayColumn:

NSBrowser

displayIfNeeded

NSWindow, NSView

displayIfNeededIgnoringOpacity

NSView

displayIfNeededInRect:

NSView

displayIfNeededInRectIgnoringOpacity:

NSView

displayMode

NSToolbar

displayName

NSFont, NSDocument

displayNameAtPath:

NSFileManager

displayNameForType:

NSDocumentController

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

displayRect:

NSView

displayRectIgnoringOpacity:

NSView

dissolveToPoint:fraction:

NSImage

dissolveToPoint:fromRect:fraction:

NSImage

distantFuture

NSDate

distantPast

NSDate

dividerThickness

NSSplitView

doClick:

NSBrowser

doCommandBySelector:

NSResponder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

doDoubleClick:

NSBrowser

document

NSWindowController

documentClassForType:

NSDocumentController

documentCursor

NSScrollView, NSClipView

documentForFileName:

NSDocumentController

documentForWindow:

NSDocumentController

documentRect

NSClipView

documentView

NSScrollView, NSClipView

documentVisibleRect

NSScrollView, NSClipView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

documents

NSDocumentController

doesNotRecognizeSelector:

NSObject

domain

NSPrinter, NSNetService

doubleAction

NSTableView, NSMatrix, NSBrowser

doubleClickAtIndex:

NSAttributedString

doubleValue

NSString, NSProgressIndicator, NSControl, NSDecimalNumber, NSCell, NSNumber, NSActionCell

dragColor:withEvent:fromView:

NSColorPanel

dragImage:at:offset:event:pasteboard:source:slideBack:

NSWindow

dragImageForRows:event:dragImageOffset:

NSTableView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

dragImageForSelectionWithEvent:origin:

NSTextView

dragOperationForDraggingInfo:type:

NSTextView

dragSelectionWithEvent:offset:slideBack:

NSTextView

draggedColumn

NSTableHeaderView

draggedDistance

NSTableHeaderView

draw

NSImageRep

drawArrow:highlight:

NSScroller

drawAtPoint:

NSAttributedString, NSImageRep

drawAtPoint:fromRect:operation:fraction:

NSImage

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

drawBackgroundForGlyphRange:atPoint:

NSLayoutManager

drawBarInside:flipped:

NSSliderCell

drawBorderAndBackgroundWithFrame:inView:

NSMenuItemCell

drawCell:

NSControl

drawCellAtIndex:

NSForm

drawCellAtRow:column:

NSMatrix

drawCellInside:

NSControl

drawDividerInRect:

NSSplitView

drawGlyphsForGlyphRange:atPoint:

NSLayoutManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

drawGridInClipRect:

NSTableView

drawHashMarksAndLabelsInRect:

NSRulerView

drawImageWithFrame:inView:

NSMenuItemCell

drawInRect:

NSAttributedString, NSImageRep

drawInRect:fromRect:operation:fraction:

NSImage

drawInsertionPointInRect:color:turnedOn:

NSTextView

drawInteriorWithFrame:inView:

NSCell

drawKeyEquivalentWithFrame:inView:

NSMenuItemCell

drawKnob

NSSliderCell, NSScroller

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

drawLabel:inRect:

NSTabViewItem

drawMarkersInRect:

NSRulerView

drawPackedGlyphs:atPoint:

NSBezierPath

drawPageBorderWithSize:

NSView

drawParts

NSScroller

drawRect:

NSRulerMarker, NSView

drawRepresentation:inRect:

NSImage

drawRow:clipRect:

NSTableView

drawSelector

NSCustomImageRep

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

drawSeparatorItemWithFrame:inView:

NSMenuItemCell

drawSheetBorderWithSize:

NSView

drawStateImageWithFrame:inView:

NSMenuItemCell

drawSwatchInRect:

NSColor

drawTitleOfColumn:inRect:

NSBrowser

drawTitleWithFrame:inView:

NSMenuItemCell

drawUnderlineForGlyphRange:underlineType:baselineOffset:lineFragmentRect:lineFragmentG

NSLayoutManager

drawWellInside:

NSColorWell

drawWithFrame:inView:

NSCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

drawerDidClose:

NSDrawer

drawerDidOpen:

NSDrawer

drawerShouldClose:

NSDrawer

drawerShouldOpen:

NSDrawer

drawerWillClose:

NSDrawer

drawerWillOpen:

NSDrawer

drawerWillResizeContents:toSize:

NSDrawer

drawers

NSWindow

drawingRectForBounds:

NSCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

drawsBackground

NSTextFieldCell, NSTextView, NSScrollView, NSClipView, NSMatrix, NSTabView, NSTextField, NSTe

drawsCellBackground

NSMatrix

drawsGrid

NSTableView

drawsOutsideLineFragmentForGlyphAtIndex:

NSLayoutManager

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## E

EPSOperationWithView:insideRect:toData:

NSPrintOperation

EPSOperationWithView:insideRect:toData:printInfo:

NSPrintOperation

EPSOperationWithView:insideRect:toPath:printInfo:

NSPrintOperation

EPSRepresentation

NSEPSImageRep

earlierDate:

NSDate

echosBullets

NSSecureTextFieldCell

edge

NSDrawer

editColumn:row:withEvent:select:

NSTableView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

editWithFrame:inView:editor:delegate:event:

NSCell

edited:range:changeInLength:

NSTextStorage

editedColumn

NSTableView

editedMask

NSTextStorage

editedRange

NSTextStorage

editedRow

NSTableView

editingStringForObjectValue:

NSFormatter

elementAtIndex:

NSBezierPath

elementCount

NSBezierPath

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

enableCursorRects

NSWindow

enableFlushWindow

NSWindow

enableFreedObjectCheck:

NSAutoreleasePool

enableKeyEquivalentForDefaultButtonCell

NSWindow

enableMultipleThreads

NSConnection

enableRelease:

NSAutoreleasePool

enableUndoRegistration

NSUndoManager

enclosingScrollView

NSView

encodeArrayOfObjCType:count:at:

NSCoder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

encodeBool:forKey:

NSCoder, NSKeyedArchiver

encodeBycopyObject:

NSCoder

encodeByrefObject:

NSCoder

encodeBytes:length:

NSCoder

encodeBytes:length:forKey:

NSCoder, NSKeyedArchiver

encodeClassName:intoClassName:

NSArchiver

encodeConditionalObject:

NSCoder, NSArchiver

encodeConditionalObject:forKey:

NSCoder, NSKeyedArchiver

encodeDataObject:

NSCoder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

encodeDouble:forKey:

NSCoder, NSKeyedArchiver

encodeFloat:forKey:

NSCoder, NSKeyedArchiver

encodeInt32:forKey:

NSCoder, NSKeyedArchiver

encodeInt64:forKey:

NSCoder, NSKeyedArchiver

encodeInt:forKey:

NSCoder, NSKeyedArchiver

encodeNXObject:

NSCoder

encodeObject:

NSCoder

encodeObject:forKey:

NSCoder, NSKeyedArchiver

encodePoint:

NSCoder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

encodePoint:forKey:

NSCoder

encodePortObject:

NSPortCoder

encodePropertyList:

NSCoder

encodeRect:

NSCoder

encodeRect:forKey:

NSCoder

encodeRootObject:

NSCoder, NSArchiver

encodeSize:

NSCoder

encodeSize:forKey:

NSCoder

encodeValueOfObjCType:at:

NSCoder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

encodeValuesOfObjCTypes:...

NSCoder

encodeWithCoder:

NSComboBoxCell, NSComboBox

encodingScheme

NSFont

endDocument

NSView

endEditing

NSMutableAttributedString

endEditing:

NSCell

endEditingFor:

NSWindow

endLoadInBackground

NSURLHandle

endModalSession:

NSApplication

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

endPage

NSView

endSheet:

NSApplication

endSheet:returnCode:

NSApplication

endSpecifier

NSRangeSpecifier

endSubelementIdentifier

NSWhoseSpecifier

endSubelementIndex

NSWhoseSpecifier

endUndoGrouping

NSUndoManager

enqueueNotification:postingStyle:

NSNotificationQueue

enqueueNotification:postingStyle:coalesceMask:forModes:

NSNotificationQueue

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

ensureAttributesAreFixedInRange:

NSTextStorage

enterExitEventWithType:location:modifierFlags:timetamp:windowNumber:context:eventNum

NSEvent

entryType

NSCell

enumCodeValue

NSAppleEventDescriptor

enumeratorAtPath:

NSFileManager

environment

NSProcessInfo, NSTask

establishConnection

NSNibOutletConnector, NSNibConnector, NSNibControlConnector

evaluate

NSPositionalSpecifier

evaluatedArguments

NSScriptCommand

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

evaluatedReceivers

NSScriptCommand

evaluationErrorNumber

NSScriptObjectSpecifier

evaluationErrorSpecifier

NSScriptObjectSpecifier

eventClass

NSAppleEventDescriptor

eventID

NSAppleEventDescriptor

eventNumber

NSEvent

exceptionWithName:reason:userInfo:

NSException

exchangeObjectAtIndex:withObjectAtIndex:

NSMutableArray

executablePath

NSBundle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

executeAndReturnError:

NSAppleScript

executeAppleEvent:error:

NSAppleScript

executeCommand

NSScriptCommand

exit

NSThread

expandItem:

NSOutlineView

expandItem:expandChildren:

NSOutlineView

extendPowerOffBy:

NSWorkspace

extraLineFragmentRect

NSLayoutManager

extraLineFragmentTextContainer

NSLayoutManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

extraLineFragmentUsedRect

NSLayoutManager

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## F

failureReason

NSURLHandle

familyName

NSFont

fastestEncoding

NSString

fieldEditor:forObject:

NSWindow

fileAttributes

NSFileWrapper, NSDirectoryEnumerator

fileAttributesAtPath:traverseLink:

NSFileManager

fileAttributesToWriteToFile:ofType:saveOperation:

NSDocument

fileCreationDate

NSDictionary

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

fileDescriptor

NSFileHandle

fileExistsAtPath:

NSFileManager

fileExistsAtPath:isDirectory:

NSFileManager

fileExtensionHidden

NSDictionary

fileExtensionsFromType:

NSDocumentController

fileGroupOwnerAccountID

NSDictionary

fileGroupOwnerAccountName

NSDictionary

fileHFSCreatorCode

NSDictionary

fileHFSTypeCode

NSDictionary

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

fileHandleForReading

NSPipe

fileHandleForReadingAtPath:

NSFileHandle

fileHandleForUpdatingAtPath:

NSFileHandle

fileHandleForWriting

NSPipe

fileHandleForWritingAtPath:

NSFileHandle

fileHandleWithNullDevice

NSFileHandle

fileHandleWithStandardError

NSFileHandle

fileHandleWithStandardInput

NSFileHandle

fileHandleWithStandardOutput

NSFileHandle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

fileIsAppendOnly

NSDictionary

fileIsImmutable

NSDictionary

fileModificationDate

NSDictionary

fileName

NSDocument

fileNameExtensionWasHiddenInLastRunSavePanel

NSDocument

fileNameFromRunningSavePanelForSaveOperation:

NSDocument

fileNamesFromRunningOpenPanel

NSDocumentController

fileOwnerAccountID

NSDictionary

fileOwnerAccountName

NSDictionary

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

filePosixPermissions

NSDictionary

fileSize

NSDictionary

fileSystemAttributesAtPath:

NSFileManager

fileSystemChanged

NSWorkspace

fileSystemFileNumber

NSDictionary

fileSystemNumber

NSDictionary

fileSystemRepresentation

NSString

fileSystemRepresentationWithPath:

NSFileManager

fileType

NSDictionary, NSDocument

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

fileTypeFromLastRunSavePanel

NSDocument

fileURLWithPath:

NSURL

fileWrapper

NSTextAttachment

fileWrapperRepresentationOfType:

NSDocument

fileWrappers

NSFileWrapper

filename

NSFileWrapper, NSSavePanel

filenames

NSOpenPanel

fill

NSBezierPath

fillAttributesCache

NSSimpleHorizontalTypesetter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

fillRect:

NSBezierPath

finalWritePrintInfo

NSPrintPanel

findApplications

NSWorkspace

finishDecoding

NSKeyedUnarchiver

finishEncoding

NSKeyedArchiver

finishLaunching

NSApplication

fire

NSTimer

fireDate

NSTimer

firstGlyphIndexOfCurrentLineFragment

NSSimpleHorizontalTypesetter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

firstLineHeadIndent

NSParagraphStyle

firstObjectCommonWithArray:

NSArray

firstResponder

NSWindow

firstTextView

NSLayoutManager

firstUnlaidCharacterIndex

NSLayoutManager

firstUnlaidGlyphIndex

NSLayoutManager

firstVisibleColumn

NSBrowser

fixAttachmentAttributeInRange:

NSMutableAttributedString

fixAttributesInRange:

NSMutableAttributedString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

fixFontAttributeInRange:

NSMutableAttributedString

fixParagraphStyleAttributeInRange:

NSMutableAttributedString

fixesAttributesLazily

NSTextStorage

flagsChanged:

NSResponder

flatness

NSBezierPath

floatForKey:

NSUserDefaults

floatForKey:inTable:

NSPrinter

floatValue

NSString, NSControl, NSCell, NSNumber, NSActionCell

flushBuffer

NSOpenGLContext

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

flushBufferedKeyEvents

NSResponder

flushCachedData

NSURLHandle

flushGraphics

NSGraphicsContext

flushHostCache

NSHost

flushWindow

NSWindow

flushWindowIfNeeded

NSWindow

focusStack

NSGraphicsContext

focusView

NSView

font

NSTextStorage, NSControl, NSCell, NSTabView, NSMenuView, NSText

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

fontAttributesInRange:

NSAttributedString

fontManager:willIncludeFont:

NSFontManager

fontMenu:

NSFontManager

fontName

NSFont

fontNamed:hasTraits:

NSFontManager

fontPanel:

NSFontManager

fontWithFamily:traits:weight:size:

NSFontManager

fontWithName:matrix:

NSFont

fontWithName:size:

NSFont

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

foregroundColor

NSTextStorage

formIntersectionWithCharacterSet:

NSMutableCharacterSet

formUnionWithCharacterSet:

NSMutableCharacterSet

format

NSNumberFormatter

formatter

NSControl, NSCell

forwardInvocation:

NSUndoManager, NSObject, NSProxy

fractionOfDistanceThroughGlyphForPoint:inTextContainer:

NSLayoutManager

fragment

NSURL

frame

NSScreen, NSWindow, NSView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

frameAutosaveName

NSWindow

frameLength

NSMethodSignature

frameOfCellAtColumn:row:

NSTableView

frameOfColumn:

NSBrowser

frameOfInsideOfColumn:

NSBrowser

frameRectForContentRect:styleMask:

NSWindow

frameRotation

NSView

frameSizeForContentSize:hasHorizontaScroller:hasVerticalScroller:borderType:

NSScrollView

fullJustifyLineAtGlyphIndex:

NSSimpleHorizontalTypesetter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

fullPathForApplication:

NSWorkspace

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## G

gState

NSWindow, NSView

generalPasteboard

NSPasteboard

getArgument:atIndex:

NSInvocation

getArgumentTypeAtIndex:

NSMethodSignature

getBitmapDataPlanes:

NSBitmapImageRep

getBytes:

NSData

getBytes:length:

NSData

getBytes:range:

NSData

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

getCFRunLoop

NSRunLoop

getCString:

NSString

getCString:maxLength:

NSString

getCString:maxLength:range:remainigRange:

NSString

getCharacters:

NSString

getCharacters:range:

NSString

getCompression:factor:

NSBitmapImageRep

getCyan:magenta:yellow:black:alpha:

NSColor

getFileSystemInfoForPath:isRemovable: isWritable:isUnmountable:description: type:

NSWorkspace

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

getFileSystemRepresentation:maxLength:

NSString

getFirstUnlaidCharacterIndex:glyphIndex:

NSLayoutManager

getGlyphs:range:

NSLayoutManager

getGlyphsInRange:glyphs:characterIndexes:glyphInscriptions:elasticBits:

NSLayoutManager

getGlyphsInRange:glyphs:characterIndexes:glyphInscriptions:elasticBits:bidiLevels:

NSLayoutManager

getHue:saturation:brightness:alpha:

NSColor

getInfoForFile:application:type:

NSWorkspace

getLineDash:count:phase:

NSBezierPath

getLineStart:end:contentsEnd:forRange:

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

getNumberOfRows:columns:

NSMatrix

getObjectValue:forString:errorDescription:

NSFormatter

getObjects:

NSArray

getObjects:range:

NSArray

getPeriodicDelay:interval:

NSButtonCell, NSCell, NSButton

getRed:green:blue:alpha:

NSColor

getReturnValue:

NSInvocation

getRow:column:forPoint:

NSMatrix

getRow:column:ofCell:

NSMatrix

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

getTIFFCompressionTypes:count:

NSBitmapImageRep

getValue:

NSValue

getValues:forAttribute:forVirtualScreen:

NSOpenGLPixelFormat

getValues:forParameter:

NSOpenGLContext

getWhite:alpha:

NSColor

globallyUniqueString

NSProcessInfo

glyphAtIndex:

NSLayoutManager

glyphAtIndex:isValidIndex:

NSLayoutManager

glyphIndexForPoint:inTextContainer:

NSLayoutManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

glyphIndexForPoint:inTextContainer:fractionOfDistanceThroughGlyph:

NSLayoutManager

glyphIndexToBreakLineByHyphenatingWordAtIndex:

NSSimpleHorizontalTypesetter

glyphIndexToBreakLineByWordWrappingAtIndex:

NSSimpleHorizontalTypesetter

glyphInfoWithCharacterIdentifier:collection:baseString:

NSGlyphInfo

glyphInfoWithGlyph:forFont:baseString:

NSGlyphInfo

glyphInfoWithGlypName:forFont:baseString:

NSGlyphInfo

glyphIsEncoded:

NSFont

glyphName

NSGlyphInfo

glyphPacking

NSFont

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

glyphRangeForBoundingRect:inTextContainer:

NSLayoutManager

glyphRangeForBoundingRectWithoutAdditionalLayout:inTextContainer:

NSLayoutManager

glyphRangeForCharacterRange:actualCharacterRange:

NSLayoutManager

glyphRangeForTextContainer:

NSLayoutManager

glyphWithName:

NSFont

gotoBeginning:

NSMovieView

gotoEnd:

NSMovieView

gotoPosterFrame:

NSMovieView

gradientType

NSButtonCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

graphicsContextWithAttributes:

NSGraphicsContext

graphicsContextWithWindow:

NSGraphicsContext

graphicsPort

NSGraphicsContext

grayColor

NSColor

greenColor

NSColor

greenComponent

NSColor

gridColor

NSTableView, NSColor

groupingLevel

NSUndoManager

groupsByEvent

NSUndoManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

growGlyphCaches:fillGlyphInfo:

NSSimpleHorizontalTypesetter

guessesForWord:

NSSpellChecker

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## H

handleCloseScriptCommand:

NSWindow

handleFailureInFunction:file:lineNumber:description:

NSAssertionHandler

handleFailureInMethod:object:file:lineNumber:description:

NSAssertionHandler

handleMachMessage:

NSMachPort

handleMouseEvent:

NSInputManager

handlePortMessage:

NSPort

handlePrintScriptCommand:

NSWindow

handleSaveScriptCommand:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

hasAlpha

NSImageRep

hasCloseBox

NSWindow

hasDynamicDepthLimit

NSWindow

hasEditedDocuments

NSDocumentController

hasHorizontalRuler

NSScrollView

hasHorizontalScroller

NSScrollView, NSBrowser

hasMemberInPlane:

NSCharacterSet

hasPrefix:

NSString

hasShadow

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

hasSubmenu

NSMenuItem

hasSuffix:

NSString

hasThousandSeparators

NSNumberFormatter

hasTitleBar

NSWindow

hasUndoManager

NSDocument

hasValidObjectValue

NSCell

hasVerticalRuler

NSScrollView

hasVerticalScroller

NSComboBoxCell, NSScrollView, NSComboBox

hash

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

headIndent

NSParagraphStyle

headerCell

NSTableColumn

headerColor

NSColor

headerRectOfColumn:

NSTableHeaderView

headerTextColor

NSColor

headerView

NSTableView

heightAdjustLimit

NSView

heightTracksTextView

NSTextContainer

helpRequested:

NSMenu, NSResponder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

hide

NSCursor

hide:

NSApplication

hideOtherApplications

NSWorkspace

hideOtherApplications:

NSApplication

hidesOnDeactivate

NSWindow

highlight:

NSButton, NSScroller

highlight:withFrame:inView:

NSCell

highlightCell:atRow:column:

NSMatrix

highlightColor

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

highlightColorInView:

NSBrowserCell

highlightColorWithFrame:inView:

NSCell

highlightMode

NSStatusItem

highlightSelectionInClipRect:

NSTableView

highlightWithLevel:

NSColor

highlightedBranchImage

NSBrowserCell

highlightedItemIndex

NSMenuView

highlightedTableColumn

NSTableView

highlightsBy

NSButtonCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

hitPart

NSScroller

hitTest:

NSView

horizontalEdgePadding

NSMenuView

horizontalLineScroll

NSScrollView

horizontalPageScroll

NSScrollView

horizontalPagination

NSPrintInfo

horizontalRulerView

NSScrollView

horizontalScroller

NSScrollView

host

NSPrinter, NSURL

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

hostName

NSProcessInfo

hostWithAddress:

NSHost

hostWithName:

NSHost

hotSpot

NSCursor

hourOfDay

NSCalendarDate

hueComponent

NSColor

hyphenationFactor

NSLayoutManager

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## I

IBeamCursor

NSCursor

icon

NSFileWrapper

iconForFile:

NSWorkspace

iconForFileType:

NSWorkspace

iconForFiles:

NSWorkspace

identifier

NSTableColumn, NSTabViewItem, NSToolbar

ignoreWord:inSpellDocumentWithTag:

NSSpellChecker

ignoredWordsInSpellDocumentWithTag:

NSSpellChecker

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

ignoresAlpha

NSColor

ignoresMouseEvents

NSWindow

ignoresMultiClick

NSControl

illegalCharacterSet

NSCharacterSet

image

NSSlider, NSBrowserCell, NSCursor, NSMenuItem, NSCell, NSToolbarItem, NSButton, NSImageVie

image:didLoadPartOfRepresentation:withValidRows:

NSImage

image:didLoadRepresentation:withStatus:

NSImage

image:didLoadRepresentationHeader:

NSImage

image:willLoadRepresentation:

NSImage

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

imageAlignment

NSImageCell, NSImageView

imageAndTitleOffset

NSMenuView

imageAndTitleWidth

NSMenuView

imageDidNotDraw:inRect:

NSImage

imageDimsWhenDisabled

NSButtonCell

imageFileTypes

NSImage, NSImageRep

imageFrameStyle

NSImageCell, NSImageView

imageInterpolation

NSGraphicsContext

imageNamed:

NSImage

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

imageOrigin

NSRulerMarker

imagePasteboardTypes

NSImage, NSImageRep

imagePosition

NSButtonCell, NSButton

imageRectForBounds:

NSCell, NSMenuItemCell

imageRectForPaper:

NSPrinter

imageRectInRuler

NSRulerMarker

imageRepClassForData:

NSImageRep

imageRepClassForFileType:

NSImageRep

imageRepClassForPasteboardType:

NSImageRep

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

imageRepWithContentsOfFile:

NSImageRep

imageRepWithContentsOfURL:

NSImageRep

imageRepWithData:

NSPDFImageRep, NSEPSImageRep, NSBitmapImageRep, NSPICTImageRep

imageRepWithPasteboard:

NSImageRep

imageRepsWithContentsOfFile:

NSImageRep

imageRepsWithContentsOfURL:

NSImageRep

imageRepsWithData:

NSBitmapImageRep

imageRepsWithPasteboard:

NSImageRep

imageScaling

NSImageCell, NSImageView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

imageUnfilteredFileTypes

NSImage, NSImageRep

imageUnfilteredPasteboardTypes

NSImage, NSImageRep

imageWidth

NSMenuItemCell

imageablePageBounds

NSPrintInfo

importsGraphics

NSTextView, NSCell, NSTextField, NSText

inLiveResize

NSView

increaseLengthBy:

NSMutableData

increment

NSStepperCell, NSStepper

incrementBy:

NSProgressIndicator

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

incrementalLoadFromData:complete:

NSBitmapImageRep

indent:

NSResponder

indentationMarkerFollowsCell

NSOutlineView

indentationPerLevel

NSOutlineView

independentConversationQueueing

NSConnection

index

NSIndexSpecifier

indexOfCellWithTag:

NSForm

indexOfItem:

NSPopUpButton, NSPopUpButtonCell, NSMenu

indexOfItemAtPoint:

NSMenuView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

indexOfItemWithObjectValue:

NSComboBoxCell, NSComboBox

indexOfItemWithRepresentedObject:

NSPopUpButton, NSPopUpButtonCell, NSMenu

indexOfItemWithSubmenu:

NSMenu

indexOfItemWithTag:

NSPopUpButton, NSPopUpButtonCell, NSMenu

indexOfItemWithTarget:andAction:

NSPopUpButton, NSPopUpButtonCell, NSMenu

indexOfItemWithTitle:

NSPopUpButton, NSPopUpButtonCell, NSMenu

indexOfObject:

NSArray

indexOfObject:inRange:

NSArray

indexOfObjectIdenticalTo:

NSArray

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

indexOfObjectIdenticalTo:inRange:

NSArray

indexOfSelectedItem

NSPopUpButton, NSPopUpButtonCell, NSComboBoxCell, NSForm, NSComboBox

indexOfTabViewItem:

NSTabView

indexOfTabViewItemWithIdentifier:

NSTabView

indexOfTickMarkAtPoint:

NSSliderCell

indicatorImageInTableColumn:

NSTableView

indicesOfObjectsByEvaluatingWithContainer:count:

NSScriptObjectSpecifier

infoDictionary

NSBundle

init

NSString, NSNetServiceBrowser, NSUserDefaults, NSDocumentController, NSLayoutManager, NSC
NSDocument

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initAndTestWithTests:

NSLogicalTest

initAsTearOff

NSMenuView

initByReferencingFile:

NSImage

initByReferencingURL:

NSImage

initDirectoryWithFileWrappers:

NSFileWrapper

initFileURLWithPath:

NSURL

initForIncrementalLoad

NSBitmapImageRep

initForReadingWithData:

NSKeyedUnarchiver, NSUnarchiver

initForWritingWithMutableData:

NSKeyedArchiver, NSArchiver

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initImageCell:

NSCell

initListDescriptor

NSAppleEventDescriptor

initNotTestWithTest:

NSLogicalTest

initOrTestWithTests:

NSLogicalTest

initRecordDescriptor

NSAppleEventDescriptor

initRegularFileWithContents:

NSFileWrapper

initRemoteWithProtocolFamily:socketType:protocol:address:

NSSocketPort

initRemoteWithTCPPort:host:

NSSocketPort

initSymbolicLinkWithDestination:

NSFileWrapper

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initTextCell:

NSFormCell, NSCell

initTextCell:pullsDown:

NSPopUpButtonCell

initWithAEDescNoCopy:

NSAppleEventDescriptor

initWithArray:

NSSet, NSArray, NSCountedSet

initWithArray:copyItems:

NSArray

initWithAttributedString:

NSAttributedString

initWithAttributes:

NSOpenGLPixelFormat

initWithBitmapDataPlanes:pixelsWide:pixelsHigh:bitsPerSample:samplesPerPixel:hasAlpha:is

NSBitmapImageRep

initWithBool:

NSNumber

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithBytes:length:

NSData

initWithBytes:objCType:

NSValue

initWithBytesNoCopy:length:

NSData

initWithBytesNoCopy:length:freeWhenDone:

NSData

initWithCString:

NSString

initWithCString:length:

NSString

initWithCStringNoCopy:length:freeWhenDone:

NSString

initWithCapacity:

NSMutableArray, NSMutableData, NSMutableString, NSMutableDictionary, NSMutableSet, NSCount

initWithChar:

NSNumber

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithCharacters:length:

NSString

initWithCharactersNoCopy:length:freeWhenDone:

NSString

initWithCoder:

NSComboBoxCell, NSComboBox

initWithCommandDescription:

NSScriptCommand

initWithCondition:

NSConditionLock

initWithContainerClassDescription:containerSpecifier:key:

NSScriptObjectSpecifier

initWithContainerClassDescription:containerSpecifier:key:index:

NSIndexSpecifier

initWithContainerClassDescription:containerSpecifier:key:name:

NSNameSpecifier

initWithContainerClassDescription:containerSpecifier:key:relativePosition:baseSpecifier:

NSRelativeSpecifier

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithContainerClassDescription:containerSpecifier:key:startSpecifier:endSpecifier:

NSRangeSpecifier

initWithContainerClassDescription:containerSpecifier:key:test:

NSWhoseSpecifier

initWithContainerClassDescription:containerSpecifier:key:uniqueID:

NSUniqueIDSpecifier

initWithContainerSize:

NSTextContainer

initWithContainerSpecifier:key:

NSScriptObjectSpecifier

initWithContentRect:styleMask:backing:defer:

NSWindow

initWithContentRect:styleMask:backing:defer:screen:

NSWindow

initWithContentSize:preferredEdge:

NSDrawer

initWithContentsOfFile:

NSImage, NSString, NSData, NSDictionary, NSArray

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithContentsOfFile:byReference:

NSSound

initWithContentsOfFile:ofType:

NSDocument

initWithContentsOfMappedFile:

NSData

initWithContentsOfURL:

NSImage, NSString, NSData, NSDictionary, NSArray

initWithContentsOfURL:byReference:

NSSound

initWithContentsOfURL:error:

NSAppleScript

initWithContentsOfURL:ofType:

NSDocument

initWithData:

NSImage, NSSound, NSData, NSPDFImageRep, NSEPSImageRep, NSOpenGLPixelFormat, NSBitm

initWithData:encoding:

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithDateFormat:allowNaturalLanguage:

NSDateFormatter

initWithDecimal:

NSDecimalNumber

initWithDelegate:name:

NSInputServer

initWithDescriptorType:bytes:length:

NSAppleEventDescriptor

initWithDescriptorType:data:

NSAppleEventDescriptor

initWithDictionary:

NSDictionary, NSPrintInfo

initWithDictionary:copyItems:

NSDictionary

initWithDomain:type:name:

NSNetService

initWithDomain:type:name:port:

NSNetService

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithDouble:

NSNumber

initWithDrawSelector:delegate:

NSCustomImageRep

initWithEventClass:eventID:targetDescriptor:returnID:transactionID:

NSAppleEventDescriptor

initWithFileDescriptor:

NSFileHandle

initWithFileDescriptor:closeOnDealloc:

NSFileHandle

initWithFileWrapper:

NSTextAttachment

initWithFireDate:interval:target:selector:userInfo:repeats:

NSTimer

initWithFloat:

NSNumber

initWithFocusedViewRect:

NSBitmapImageRep

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithFormat:...

NSString

initWithFormat:arguments:

NSString

initWithFormat:locale:...

NSString

initWithFormat:locale:arguments:

NSString

initWithFormat:shareContext:

NSOpenGLContext

initWithFrame:

NSTextView, NSControl, NSMatrix, NSView, NSMenuView

initWithFrame:mode:cellClass:numberOfRows:numberOfColumns:

NSMatrix

initWithFrame:mode:prototype:numberOfRows:numberOfColumns:

NSMatrix

initWithFrame:pixelFormat:

NSOpenGLView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithFrame:pullsDown:

NSPopUpButton

initWithFrame:textContainer:

NSTextView

initWithHTML:baseURL:documentAttributes:

NSAttributedString

initWithHTML:documentAttributes:

NSAttributedString

initWithIdentifier:

NSTableColumn, NSTabViewItem, NSToolbar

initWithImage:foregroundColorHint:backgroundColorHint:hotSpot:

NSCursor

initWithImage:hotSpot:

NSCursor

initWithInt:

NSNumber

initWithItemIdentifier:

NSToolbarItem

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithLength:

NSMutableData

initWithLocal:connection:

NSDistantObject

initWithLong:

NSNumber

initWithLongLong:

NSNumber

initWithMachPort:

NSMachPort

initWithMantissa:exponent:isNegative:

NSDecimalNumber

initWithMovie:

NSMovie

initWithName:

NSTimeZone, NSColorList

initWithName:data:

NSTimeZone

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithName:fromFile:

NSColorList

initWithName:host:

NSInputManager

initWithName:reason:userInfo:

NSException

initWithNativeHandle:

NSFileHandle

initWithNativeHandle:closeOnDealloc:

NSFileHandle

initWithNotificationCenter:

NSNotificationQueue

initWithObjectSpecifier:comparisonOperator:testObject:

NSSpecifierTest

initWithObjects:...

NSSet, NSArray

initWithObjects:count:

NSSet, NSArray

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithObjects:forKeys:

NSDictionary

initWithObjects:forKeys:count:

NSDictionary

initWithObjectsAndKeys:...

NSDictionary

initWithPasteboard:

NSImage, NSSound, NSMovie

initWithPath:

NSBundle, NSFileWrapper, NSDistributedLock

initWithPath:documentAttributes:

NSAttributedString

initWithPickerMask:colorPanel:

NSColorPicker

initWithPosition:objectSpecifier:

NSPositionalSpecifier

initWithProtocolFamily:socketType:protocol:address:

NSSocketPort

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithProtocolFamily:socketType:protocol:socket:

NSSocketPort

initWithRTF:documentAttributes:

NSAttributedString

initWithRTFD:documentAttributes:

NSAttributedString

initWithRTFDFileWrapper:documentAttributes:

NSAttributedString

initWithReceivePort:sendPort:

NSConnection

initWithReceivePort:sendPort:components:

NSPortCoder

initWithRoundingMode:scale:raiseOnExactness:raiseOnOverflow:raiseOnUnderflow:raiseOnDi

NSDecimalNumberHandler

initWithRulerView:markerLocation:image:imageOrigin:

NSRulerMarker

initWithScheme:host:path:

NSURL

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithScrollView:orientation:

NSRulerView

initWithSendPort:receivePort:components:

NSPortMessage

initWithSerializedRepresentation:

NSFileWrapper

initWithSet:

NSSet, NSCountedSet

initWithSet:copyItems:

NSSet

initWithShort:

NSNumber

initWithSize:

NSImage

initWithSize:depth:separate:alpha:

NSCachedImageRep

initWithSource:

NSAppleScript

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithString:

NSString, NSAttributedString, NSURL, NSDecimalNumber, NSCalendarDate, NSDate, NSScanner

initWithString:attributes:

NSAttributedString

initWithString:calendarFormat:

NSCalendarDate

initWithString:calendarFormat:locale:

NSCalendarDate

initWithString:locale:

NSDecimalNumber

initWithString:relativeToURL:

NSURL

initWithSuiteName:className:dictionary:

NSScriptClassDescription

initWithSuiteName:commandName:dictionary:

NSScriptCommandDescription

initWithTCPPort:

NSSocketPort

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithTarget:connection:

NSDistantObject

initWithTarget:protocol:

NSProtocolChecker

initWithTimeInterval:sinceDate:

NSDate

initWithTimeIntervalSinceNow:

NSDate

initWithTimeIntervalSinceReferenceDate:

NSDate

initWithTitle:

NSMenu

initWithTitle:action:keyEquivalent:

NSMenuItem

initWithTransform:

NSAffineTransform

initWithType:location:

NSTextTab

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithURL:byReference:

NSMovie

initWithURL:cached:

NSURLHandle

initWithURL:documentAttributes:

NSAttributedString

initWithUTF8String:

NSString

initWithUnsignedChar:

NSNumber

initWithUnsignedInt:

NSNumber

initWithUnsignedLong:

NSNumber

initWithUnsignedLongLong:

NSNumber

initWithUnsignedShort:

NSNumber

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initWithUser:

NSUserDefaults

initWithWindow:

NSWindowController

initWithWindow:rect:

NSCachedImageRep

initWithWindowNibName:

NSWindowController

initWithWindowNibName:owner:

NSWindowController

initWithWindowNibPath:owner:

NSWindowController

initWithWindowRef:

NSWindow

initWithYear:month:day:hour:minute:second:timeZone:

NSCalendarDate

initialFirstResponder

NSWindow, NSTabViewItem

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

initialize

NSObject

innerRect

NSMenuView

insertAttributedString:atIndex:

NSMutableAttributedString

insertBacktab:

NSResponder

insertColor:key:atIndex:

NSColorList

insertColumn:

NSMatrix

insertColumn:withCells:

NSMatrix

insertDescriptor:atIndex:

NSAppleEventDescriptor

insertEntry:atIndex:

NSForm

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

insertGlyph:atGlyphIndex:characterIndex:

NSSimpleHorizontalTypesetter, NSLayoutManager

insertItem:atIndex:

NSMenu

insertItemWithItemIdentifier:atIndex:

NSToolbar

insertItemWithObjectValue:atIndex:

NSComboBoxCell, NSComboBox

insertItemWithTitle:action:keyEquivalent:atIndex:

NSMenu

insertItemWithTitle:atIndex:

NSPopUpButton, NSPopUpButtonCell

insertNewButtonImage:in:

NSColorPicker

insertNewline:

NSResponder

insertNewlineIgnoringFieldEditor:

NSResponder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

insertObject:atIndex:

NSMutableArray

insertParagraphSeparator:

NSResponder

insertRow:

NSMatrix

insertRow:withCells:

NSMatrix

insertString:atIndex:

NSMutableString

insertTab:

NSResponder

insertTabIgnoringFieldEditor:

NSResponder

insertTabViewItem:atIndex:

NSTabView

insertText:

NSResponder, NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

insertTextContainer:atIndex:

NSLayoutManager

insertionContainer

NSPositionalSpecifier

insertionIndex

NSPositionalSpecifier

insertionKey

NSPositionalSpecifier

insertionPointColor

NSTextView

insertionReplaces

NSPositionalSpecifier

instanceMethodForSelector:

NSObject

instanceMethodSignatureForSelector:

NSObject

instancesRespondToSelector:

NSObject

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

int32Value

NSAppleEventDescriptor

intAttribute:forGlyphAtIndex:

NSLayoutManager

intForKey:inTable:

NSPrinter

intValue

NSString, NSControl, NSCell, NSNumber, NSActionCell

integerForKey:

NSUserDefaults

intercellSpacing

NSTableView, NSComboBoxCell, NSMatrix, NSComboBox

interfaceStyle

NSResponder

interpretKeyEvents:

NSResponder

interrupt

NSTask

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

intersectSet:

NSMutableSet

intersectsSet:

NSSet

invalidate

NSTimer, NSPort, NSConnection

invalidateAttributesInRange:

NSTextStorage

invalidateClassDescriptionCache

NSClassDescription

invalidateCursorRectsForView:

NSWindow

invalidateDisplayForCharacterRange:

NSLayoutManager

invalidateDisplayForGlyphRange:

NSLayoutManager

invalidateGlyphsForCharacterRange:changeInLength:actualCharacterRange:

NSLayoutManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

invalidateHashMarks

NSRulerView

invalidateLayoutForCharacterRange:isSoft:actualCharacterRange:

NSLayoutManager

invalidateShadow

NSWindow

invalidateTextContainerOrigin

NSTextView

inverseForRelationshipKey:

NSClassDescription

invert

NSMutableCharacterSet, NSAffineTransform

invertedSet

NSCharacterSet

invocation

NSDistantObjectRequest

invocationWithMethodSignature:

NSInvocation

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

invoke

NSInvocation

invokeWithTarget:

NSInvocation

isARepeat

NSEvent

isAbsolutePath

NSString

isActive

NSApplication, NSColorWell

isAtEnd

NSScanner, NSUnarchiver

isAttached

NSMenu, NSMenuView

isAutodisplay

NSWindow

isAutoscroll

NSMatrix

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isBaseFont

NSFont

isBezeled

NSProgressIndicator, NSCell, NSTextField

isBordered

NSCell, NSButton, NSColorWell, NSTextField

isBycopy

NSPortCoder

isByref

NSPortCoder

isCachedSeparately

NSImage

isColor

NSPrinter

isColumnSelected:

NSTableView

isCompiled

NSAppleScript

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isContextHelpModeActive

NSHelpManager

isContinuous

NSControl, NSCell, NSColorPanel

isContinuousSpellCheckingEnabled

NSTextView

isControllerVisible

NSMovieView

isCopyingOperation

NSPrintOperation

isDataRetained

NSImage

isDaylightSavingTime

NSTimeZone

isDaylightSavingTimeForDate:

NSTimeZone

isDeletableFileAtPath:

NSFileManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isDescendantOf:

NSView

isDirectory

NSFileWrapper

isDisplayedWhenStopped

NSProgressIndicator

isDocumentEdited

NSWindow, NSDocument

isDragging

NSRulerMarker

isDrawingToScreen

NSGraphicsContext

isEditable

NSTableColumn, NSTextView, NSCell, NSMovieView, NSImageView, NSColorList, NSTextField, NST

isEmpty

NSBezierPath

isEnabled

NSControl, NSMenuItem, NSCell, NSFontManager, NSToolbarItem, NSFontPanel, NSStatusItem

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isEntryAcceptable:

NSCell

isEqualToArray:

NSArray

isEqualToAttributedString:

NSAttributedString

isEqualToData:

NSData

isEqualToDate:

NSDate

isEqualToDictionary:

NSDictionary

isEqualToHost:

NSHost

isEqualToNumber:

NSNumber

isEqualToSet:

NSSet

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isEqualToString:

NSString

isEqualToTimeZone:

NSTimeZone

isEqualToValue:

NSValue

isExcludedFromWindowsMenu

NSWindow

isExecutableFileAtPath:

NSFileManager

isExpandable:

NSOutlineView

isExpanded

NSSavePanel

isExtensionHidden

NSSavePanel

isFieldEditor

NSTextView, NSText

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isFilePackageAtPath:

NSWorkspace

isFileURL

NSURL

isFixedPitch

NSFont

isFlipped

NSImage, NSView, NSRulerView

isFloatingPanel

NSWindow, NSPanel

isFlushWindowDisabled

NSWindow

isFontAvailable:

NSPrinter

isHidden

NSApplication

isHighlighted

NSCell, NSMenuItemCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isHorizontal

NSMenuView

isHorizontallyCentered

NSPrintInfo

isHorizontallyResizable

NSText

isHostCacheEnabled

NSHost

isIndeterminate

NSProgressIndicator

isItemExpanded:

NSOutlineView

isKey:inTable:

NSPrinter

isKeyWindow

NSWindow

isLeaf

NSBrowserCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isLoaded

NSBundle, NSBrowserCell, NSBrowser

isLocationRequiredToCreateForKey:

NSScriptClassDescription

isMainWindow

NSWindow

isMiniaturizable

NSWindow

isMiniaturized

NSWindow

isModalPanel

NSWindow

isMovable

NSRulerMarker

isMovableByWindowBackground

NSWindow

isMultiThreaded

NSThread

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isMultiple

NSFontManager

isMuted

NSMovieView

isNativeType:

NSDocument

isOneShot

NSWindow

isOneway

NSMethodSignature

isOpaque

NSWindow, NSButtonCell, NSFormCell, NSCell, NSImageRep, NSView

isOptionalArgumentWithName:

NSScriptCommandDescription

isOutputStackInReverseOrder

NSPrinter

isPaneSplitter

NSSplitView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isPartialStringValid:newEditingString:errorDescription:

NSFormatter

isPartialStringValid:proposedSelectedRange:originalString:originalSelectedRange:errorDescri

NSFormatter

isPlanar

NSBitmapImageRep

isPlaying

NSSound, NSMovieView

isReadOnlyKey:

NSScriptClassDescription

isReadableFileAtPath:

NSFileManager

isRedoing

NSUndoManager

isRegularFile

NSFileWrapper

isReleasedWhenClosed

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isRemovable

NSRulerMarker

isResizable

NSTableColumn, NSWindow

isRichText

NSTextView, NSText

isRotatedFromBase

NSView

isRotatedOrScaledFromBase

NSView

isRowSelected:

NSTableView

isRulerVisible

NSTextView, NSText

isRunning

NSApplication, NSTask

isScrollable

NSCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isSelectable

NSTextView, NSCell, NSTextField, NSText

isSelectionByRect

NSMatrix

isSeparatorItem

NSMenuItem

isSetOnMouseEntered

NSCursor

isSetOnMouseExited

NSCursor

isSheet

NSWindow

isSimpleRectangularTextContainer

NSTextContainer

isSubclassOfClass:

NSObject

isSubsetOfSet:

NSSet

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isSubviewCollapsed:

NSSplitView

isSupersetOfSet:

NSCharacterSet

isSymbolicLink

NSFileWrapper

isTitled

NSBrowser

isTornOff

NSMenu, NSMenuView

isTransparent

NSButtonCell, NSButton

isTrue

NSScriptWhoseTest

isUndoRegistrationEnabled

NSUndoManager

isUndoing

NSUndoManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isValid

NSImage, NSTimer, NSPort, NSConnection

isValidGlyphIndex:

NSLayoutManager

isVertical

NSSlider, NSStatusBar, NSSplitView, NSSliderCell

isVerticallyCentered

NSPrintInfo

isVerticallyResizable

NSText

isVisible

NSWindow, NSToolbar

isWellFormed

NSScriptCommand

isWindowLoaded

NSWindowController

isWordInUserDictionaries:caseSensitive:

NSSpellServer

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

isWritableFileAtPath:

NSFileManager

isZoomable

NSWindow

isZoomed

NSWindow

italicAngle

NSFont

itemAdded:

NSMenuView

itemArray

NSPopUpButton, NSPopUpButtonCell, NSMenu

itemAtIndex:

NSPopUpButton, NSPopUpButtonCell, NSMenu

itemAtRow:

NSOutlineView

itemChanged:

NSMenu, NSMenuView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

itemHeight

NSComboBoxCell, NSComboBox

itemIdentifier

NSToolbarItem

itemObjectValueAtIndex:

NSComboBoxCell, NSComboBox

itemRemoved:

NSMenuView

itemTitleAtIndex:

NSPopUpButton, NSPopUpButtonCell

itemTitles

NSPopUpButton, NSPopUpButtonCell

itemWithTag:

NSMenu

itemWithTitle:

NSPopUpButton, NSPopUpButtonCell, NSMenu

items

NSToolbar

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## J

jobDisposition

NSPrintInfo

jobStyleHint

NSPrintPanel, NSPrintOperation

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## K

keepBackupFile

NSDocument

key

NSScriptObjectSpecifier

keyClassDescription

NSScriptObjectSpecifier

keyCode

NSEvent

keyDown:

NSWindow, NSResponder

keyEnumerator

NSDictionary

keyEquivalent

NSButtonCell, NSMenuItem, NSCell, NSButton

keyEquivalentFont

NSButtonCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

keyEquivalentModifierMask

NSButtonCell, NSMenuItem, NSButton

keyEquivalentOffset

NSMenuView

keyEquivalentRectForBounds:

NSMenuItemCell

keyEquivalentWidth

NSMenuItemCell, NSMenuView

keyEventWithType:location:modifierFlags:timestamp:windowNumber:context:characters:cha

NSEvent

keyForFileWrapper:

NSFileWrapper

keySpecifier

NSDeleteCommand, NSCloneCommand, NSMoveCommand, NSSetCommand

keyUp:

NSResponder

keyViewSelectionDirection

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

keyWindow

NSApplication

keyWithAppleEventCode:

NSScriptClassDescription

keyboardFocusIndicatorColor

NSColor

keysSortedByValueUsingSelector:

NSDictionary

keywordForDescriptorAtIndex:

NSAppleEventDescriptor

knobColor

NSColor

knobProportion

NSScroller

knobRectFlipped:

NSSliderCell

knobThickness

NSSlider, NSSliderCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

knownTimeZoneNames

NSTimeZone

knowsPageRange:

NSView

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## L

label

NSNibConnector, NSTabViewItem, NSToolbarItem

labelFontOfSize:

NSFont

labelFontSize

NSFont

language

NSSpellChecker, NSInputManager

languageLevel

NSPrinter

lastColumn

NSBrowser

lastItem

NSPopUpButton, NSPopUpButtonCell

lastObject

NSArray

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

lastPathComponen

NSString

lastVisibleColumn

NSBrowser

laterDate:

NSDate

launch

NSTask

launchApplication:

NSWorkspace

launchApplication:showIcon:autolaunch:

NSWorkspace

launchPath

NSTask

launchedApplications

NSWorkspace

launchedTaskWithLaunchPath:arguments:

NSTask

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

layoutControlGlyphForLineFragment:

NSSimpleHorizontalTypesetter

layoutGlyphsInHorizontalLineFragment:baseline:

NSSimpleHorizontalTypesetter

layoutGlyphsInLayoutManager:startingAtGlyphIndex:maxNumberOfLineFragments:nextGlyph

NSSimpleHorizontalTypesetter, NSTypesetter

layoutManager

NSTextView, NSTextContainer

layoutManager:didCompleteLayoutForTextContainer:atEnd:

NSLayoutManager

layoutManagerDidInvalidateLayout:

NSLayoutManager

layoutManagerOwnsFirstResponderInWindow:

NSLayoutManager

layoutManagers

NSTextStorage

layoutTab

NSSimpleHorizontalTypesetter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

leadingOffset

NSDrawer

leftMargin

NSPrintInfo

length

NSString, NSAttributedString, NSData, NSStatusItem

letterCharacterSet

NSCharacterSet

level

NSWindow

levelForItem:

NSOutlineView

levelForRow:

NSOutlineView

levelsOfUndo

NSUndoManager

lightGrayColor

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

limitDateForMode:

NSRunLoop

lineBreakBeforeIndex:withinRange:

NSAttributedString

lineBreakMode

NSParagraphStyle

lineCapStyle

NSBezierPath

lineFragmentPadding

NSTextContainer

lineFragmentRectForGlyphAtIndex:effectiveRange:

NSLayoutManager

lineFragmentRectForProposedRect:sweepDirection:movementDirection:remainingRect:

NSTextContainer

lineFragmentUsedRectForGlyphAtIndex:effectiveRange:

NSLayoutManager

lineJoinStyle

NSBezierPath

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

lineRangeForRange:

NSString

lineScroll

NSScrollView

lineSpacing

NSParagraphStyle

lineToPoint:

NSBezierPath

lineWidth

NSBezierPath

linkPath:toPath:handler:

NSFileManager

listDescriptor

NSAppleEventDescriptor

load

NSBundle, NSObject

loadColumnZero

NSBrowser

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

loadDataRepresentation:ofType:

NSDocument

loadFileWrapperRepresentation:ofType:

NSDocument

loadInBackground

NSURLHandle

loadInForeground

NSURLHandle

loadNibFile:externalNameTable:withZone:

NSBundle

loadNibNamed:owner:

NSBundle

loadResourceDataNotifyingClient:usingCache:

NSURL

loadSuiteWithDictionary:fromBundle:

NSScriptSuiteRegistry

loadSuitesFromBundle:

NSScriptSuiteRegistry

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

loadWindow

NSWindowController

loadedCellAtRow:column:

NSBrowser

localObjects

NSConnection

localTimeZone

NSTimeZone

locale

NSScanner

localizations

NSBundle

localizedCaseInsensitiveCompare:

NSString

localizedCatalogNameComponent

NSColor

localizedColorNameComponent

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

localizedCompare:

NSString

localizedInfoDictionary

NSBundle

localizedInputManagerName

NSInputManager

localizedNameForFamily:face:

NSFontManager

localizedNameForTIFFCompressionType:

NSBitmapImageRep

localizedNameOfStringEncoding:

NSString

localizedScannerWithString:

NSScanner

localizedStringForKey:value:table:

NSBundle

localizedStringWithFormat:...

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

localizesFormat

NSNumberFormatter

location

NSTextTab

locationForGlyphAtIndex:

NSLayoutManager

locationForSubmenu:

NSMenu, NSMenuView

locationInWindow

NSEvent

locationOfPrintRect:

NSView

lockBeforeDate:

NSConditionLock, NSLock, NSRecursiveLock

lockDate

NSDistributedLock

lockFocus

NSImage, NSView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

lockFocusIfCanDraw

NSView

lockFocusOnRepresentation:

NSImage

lockWhenCondition:

NSConditionLock

lockWhenCondition:beforeDate:

NSConditionLock

lockWithPath:

NSDistributedLock

longCharacterIsMember:

NSCharacterSet

longLongValue

NSNumber

longValue

NSNumber

loopMode

NSMovieView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

loosenKerning:

NSTextView

lossyCString

NSString

lowerBaseline:

NSTextView

lowercaseLetterCharacterSet

NSCharacterSet

lowercaseString

NSString

lowercaseWord:

NSResponder

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## M

machPort

NSMachPort

magentaColor

NSColor

magentaComponent

NSColor

mainBundle

NSBundle

mainMenu

NSApplication

mainScreen

NSScreen

mainWindow

NSApplication

makeCellAtRow:column:

NSMatrix

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

makeCurrentContext

NSOpenGLContext

makeDocumentWithContentsOfFile:ofType:

NSDocumentController

makeDocumentWithContentsOfURL:ofType:

NSDocumentController

makeFirstResponder:

NSWindow

makeKeyAndOrderFront:

NSWindow

makeKeyWindow

NSWindow

makeMainWindow

NSWindow

makeNewConnection:sender:

NSConnection

makeObjectsPerformSelector:

NSSet, NSArray

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

makeObjectsPerformSelector:withObject:

NSSet, NSArray

makeUntitledDocumentOfType:

NSDocumentController

makeWindowControllers

NSDocument

makeWindowsPerform:inOrder:

NSApplication

markedTextAbandoned:

NSInputManager

markedTextAttributes

NSTextView

markedTextSelectionChanged:client:

NSInputManager

markerLocation

NSRulerMarker

markers

NSRulerView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

matchesAppleEventCode:

NSScriptClassDescription

matchesOnMultipleResolution

NSImage

matrix

NSFont

matrixClass

NSBrowser

matrixInColumn:

NSBrowser

maxContentSize

NSDrawer

maxSize

NSWindow, NSToolbarItem, NSText

maxValue

NSSlider, NSProgressIndicator, NSSliderCell, NSStepperCell, NSStepper

maxVisibleColumns

NSBrowser

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

maxWidth

NSTableColumn

maximum

NSNumberFormatter

maximumAdvancement

NSFont

maximumDecimalNumber

NSDecimalNumber

maximumLineHeight

NSParagraphStyle

measurementUnits

NSRulerView

member:

NSSet

menu

NSPopUpButton, NSPopUpButtonCell, NSResponder, NSMenuItem, NSCell, NSStatusItem, NSMenu

menuBarHeight

NSMenuView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

menuBarVisible

NSMenu

menuChanged:

NSWindow

menuChangedMessagesEnabled

NSMenu

menuFontOfSize:

NSFont

menuForEvent:

NSView

menuForEvent:inRect:ofView:

NSCell

menuFormRepresentation

NSToolbarItem

menuItem

NSMenuItemCell

menuItemCellForItemAtIndex:

NSMenuView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

menuRepresentation

NSMenu

menuView

NSMenuItemCell

menuZone

NSMenu

messageFontOfSize:

NSFont

methodForSelector:

NSObject

methodReturnLength

NSMethodSignature

methodReturnType

NSMethodSignature

methodSignature

NSInvocation

methodSignatureForSelector:

NSObject, NSProxy

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

minColumnWidth

NSBrowser

minContentSize

NSDrawer

minFrameWidthWithTitle:styleMask:

NSWindow

minSize

NSWindow, NSToolbarItem, NSText

minValue

NSSlider, NSProgressIndicator, NSSliderCell, NSStepperCell, NSStepper

minWidth

NSTableColumn

miniaturize:

NSWindow

miniaturizeAll:

NSApplication

minimum

NSNumberFormatter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

minimumDecimalNumber

NSDecimalNumber

minimumLineHeight

NSParagraphStyle

minimumSize

NSTabView

miniwindowImage

NSWindow

miniwindowTitle

NSWindow

minusSet:

NSMutableSet

minuteOfHour

NSCalendarDate

miterLimit

NSBezierPath

mixedStateImage

NSMenuItem

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

mnemonic

NSMenuItem

mnemonicLocation

NSMenuItem

modalWindow

NSApplication

mode

NSMatrix, NSColorPanel

modifierFlags

NSEvent

modifyFont:

NSFontManager

modifyFontViaPanel:

NSFontManager

monthOfYear

NSCalendarDate

mostCompatibleStringEncoding

NSFont

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

mountNewRemovableMedia

NSWorkspace

mountedLocalVolumePaths

NSWorkspace

mountedRemovableMedia

NSWorkspace

mouse:inRect:

NSView

mouseDown:

NSResponder, NSControl, NSMatrix

mouseDownCanMoveWindow

NSView

mouseDownFlags

NSCell, NSMatrix

mouseDragged:

NSResponder

mouseEntered:

NSCursor, NSResponder, NSButtonCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

mouseEventWithType:location:modifierFlags:timestamp:windowNumber:context:eventNumbe

NSEvent

mouseExited:

NSCursor, NSResponder, NSButtonCell

mouseLocation

NSEvent

mouseLocationOutsideOfEventStream

NSWindow

mouseMoved:

NSResponder

mouseUp:

NSResponder

moveBackward:

NSResponder

moveBackwardAndModifySelection:

NSResponder

moveColumn:toColumn:

NSTableView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

moveDown:

NSResponder

moveDownAndModifySelection:

NSResponder

moveForward:

NSResponder

moveForwardAndModifySelection:

NSResponder

moveLeft:

NSResponder

movePath:toPath:handler:

NSFileManager

moveRight:

NSResponder

moveRulerlineFromLocation:toLocation:

NSRulerView

moveToBeginningOfDocument:

NSResponder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

moveToBeginningOfLine:

NSResponder

moveToBeginningOfParagraph:

NSResponder

moveToEndOfDocument:

NSResponder

moveToEndOfLine:

NSResponder

moveToEndOfParagraph:

NSResponder

moveToPoint:

NSBezierPath

moveUp:

NSResponder

moveUpAndModifySelection:

NSResponder

moveWordBackward:

NSResponder

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

moveWordBackwardAndModifySelection:

NSResponder

moveWordForward:

NSResponder

moveWordForwardAndModifySelection:

NSResponder

movie

NSMovieView

movieController

NSMovieView

movieRect

NSMovieView

movieUnfilteredFileTypes

NSMovie

movieUnfilteredPasteboardTypes

NSMovie

msgid

NSPortMessage

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

multipleThreadsEnabled

NSConnection

mutableBytes

NSMutableData

mutableCopy

NSObject

mutableCopyWithZone:

NSObject

mutableString

NSMutableAttributedString

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## N

name

NSImage, NSSound, NSException, NSHost, NSPrinter, NSNetService, NSTimeZone, NSNotification, NSPasteboard, NSNameSpecifier, NSColorList

names

NSHost

nativeHandle

NSFileHandle

needsDisplay

NSMenuItemCell, NSView

needsPanelToBecomeKey

NSView

needsSizing

NSMenuItemCell, NSMenuView

needsToBeUpdatedFromPath:

NSFileWrapper

negativeFormat

NSNumberFormatter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

netService:didNotPublish:

NSNetService

netService:didNotResolve:

NSNetService

netServiceBrowser:didFindDomain:moreComing:

NSNetServiceBrowser

netServiceBrowser:didFindService:moreComing:

NSNetServiceBrowser

netServiceBrowser:didNotSearch:

NSNetServiceBrowser

netServiceBrowser:didRemoveDomain:moreComing:

NSNetServiceBrowser

netServiceBrowser:didRemoveService:moreComing:

NSNetServiceBrowser

netServiceBrowserDidStopSearch:

NSNetServiceBrowser

netServiceBrowserWillSearch:

NSNetServiceBrowser

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

netServiceDidResolveAddress:

NSNetService

netServiceDidStop:

NSNetService

netServiceWillPublish:

NSNetService

netServiceWillResolve:

NSNetService

new

NSObject

newDocument:

NSDocumentController

nextEventMatchingMask:

NSWindow

nextEventMatchingMask:untilDate:inMode:dequeue:

NSWindow, NSApplication

nextObject

NSEnumerator

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

nextResponder

NSResponder

nextState

NSCell

nextWordFromIndex:forward:

NSAttributedString

noResponderFor:

NSResponder

nonBaseCharacterSet

NSCharacterSet

nonretainedObjectValue

NSValue

notANumber

NSDecimalNumber

notShownAttributeForGlyphAtIndex:

NSLayoutManager

note

NSPrinter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

noteFileSystemChanged

NSWorkspace

noteFileSystemChanged:

NSWorkspace

noteNewRecentDocument:

NSDocumentController

noteNewRecentDocumentURL:

NSDocumentController

noteNumberOfItemsChanged

NSComboBoxCell, NSComboBox

noteNumberOfRowsChanged

NSTableView

noteUserDefaultsChanged

NSWorkspace

notificationCenter

NSWorkspace

notificationCenterForType:

NSDistributedNotificationCenter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

notificationWithName:object:

NSNotification

notificationWithName:object:userInfo:

NSNotification

null

NSNull

nullDescriptor

NSAppleEventDescriptor

numberOfArguments

NSMethodSignature

numberOfColumns

NSTableView, NSMatrix

numberOfGlyphs

NSLayoutManager, NSFont

numberOfItems

NSPopUpButton, NSPopUpButtonCell, NSMenu, NSComboBoxCell, NSAppleEventDescriptor, NSComboBox

numberOfPlanes

NSBitmapImageRep

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

numberOfRows

NSTableView, NSMatrix

numberOfSelectedColumns

NSTableView

numberOfSelectedRows

NSTableView

numberOfTabViewItems

NSTabView

numberOfTickMarks

NSSliderCell

numberOfVirtualScreens

NSOpenGLPixelFormat

numberOfVisibleColumns

NSBrowser

numberOfVisibleItems

NSComboBoxCell, NSComboBox

numberWithBool:

NSNumber

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

numberWithChar:

NSNumber

numberWithDouble:

NSNumber

numberWithFloat:

NSNumber

numberWithInt:

NSNumber

numberWithLong:

NSNumber

numberWithLongLong:

NSNumber

numberWithShort:

NSNumber

numberWithUnsignedChar:

NSNumber

numberWithUnsignedInt:

NSNumber

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

numberWithUnsignedLong:

NSNumber

numberWithUnsignedLongLong:

NSNumber

numberWithUnsignedShort:

NSNumber

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## O

objCType

NSDecimalNumber, NSValue

object

NSNotification

objectAtIndex:

NSArray

objectBeingTested

NSScriptExecutionContext

objectEnumerator

NSDictionary, NSSet, NSArray, NSCountedSet

objectForInfoDictionaryKey:

NSBundle

objectForKey:

NSUserDefaults, NSDictionary

objectIsForcedForKey:

NSUserDefaults

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

objectIsForcedForKey:inDomain:

NSUserDefaults

objectValue

NSControl, NSCell

objectValueOfSelectedItem

NSComboBoxCell, NSComboBox

objectValues

NSComboBoxCell, NSComboBox

objectZone

NSCoder, NSUnarchiver

objectsByEvaluatingSpecifier

NSScriptObjectSpecifier

objectsByEvaluatingWithContainers:

NSScriptObjectSpecifier

objectsForKeys:notFoundMarker:

NSDictionary

offStateImage

NSMenuItem

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

offsetInFile

NSFileHandle

ok:

NSSavePanel

onStateImage

NSMenuItem

one

NSDecimalNumber

opaqueAncestor

NSView

open

NSDrawer

open:

NSDrawer

openDocument:

NSDocumentController

openDocumentWithContentsOfFile:display:

NSDocumentController

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

openDocumentWithContentsOfURL:display:

NSDocumentController

openFile:

NSWorkspace

openFile:fromImage:at:inView:

NSWorkspace

openFile:withApplication:

NSWorkspace

openFile:withApplication:andDeactivate:

NSWorkspace

openGLContext

NSOpenGLView

openOnEdge:

NSDrawer

openPanel

NSOpenPanel

openTempFile:

NSWorkspace

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

openURL:

NSWorkspace

openUntitledDocumentOfType:display:

NSDocumentController

operatingSystem

NSProcessInfo

operatingSystemName

NSProcessInfo

operatingSystemVersionString

NSProcessInfo

orangeColor

NSColor

orderBack:

NSWindow

orderFront:

NSWindow

orderFrontColorPanel:

NSApplication

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

orderFrontFontPanel:

NSFontManager

orderFrontRegardless

NSWindow

orderFrontStandardAboutPanel:

NSApplication

orderFrontStandardAboutPanelWithOptions:

NSApplication

orderOut:

NSWindow

orderWindow:relativeTo:

NSWindow

orderedIndex

NSWindow

orientation

NSPrintInfo, NSRulerView

originOffset

NSRulerView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

otherEventWithType:location:modifierFlags:timestamp:windowNumber:context:subtype:data

NSEvent

otherMouseDown:

NSResponder

otherMouseDragged:

NSResponder

otherMouseUp:

NSResponder

outlineTableColumn

NSOutlineView

outlineView:shouldCollapseItem:

NSOutlineView

outlineView:shouldEditTableColumn:item:

NSOutlineView

outlineView:shouldExpandItem:

NSOutlineView

outlineView:shouldSelectItem:

NSOutlineView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

outlineView:shouldSelectTableColumn:

NSOutlineView

outlineView:willDisplayCell:forTableColumn:item:

NSOutlineView

outlineView:willDisplayOutlineCell:forTableColumn:item:

NSOutlineView

outlineViewColumnDidMove:

NSOutlineView

outlineViewColumnDidResize:

NSOutlineView

outlineViewItemDidCollapse:

NSOutlineView

outlineViewItemDidExpand:

NSOutlineView

outlineViewItemWillCollapse:

NSOutlineView

outlineViewItemWillExpand:

NSOutlineView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

outlineViewSelectionDidChange:

NSOutlineView

outlineViewSelectionIsChanging:

NSOutlineView

outputFormat

NSKeyedArchiver

owner

NSWindowController

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## P

PDFOperationWithView:insideRect:toData:

NSPrintOperation

PDFOperationWithView:insideRect:toData:printInfo:

NSPrintOperation

PDFOperationWithView:insideRect:toPath:printInfo:

NSPrintOperation

PDFRepresentation

NSPDFImageRep

PICTRepresentation

NSPICTImageRep

pageCount

NSPDFImageRep

pageDown:

NSResponder

pageLayout

NSPageLayout

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

pageOrder

NSPrintOperation

pageScroll

NSScrollView

pageSizeForPaper:

NSPrinter

pageUp:

NSResponder

paletteFontOfSize:

NSFont

paletteLabel

NSToolbarItem

panel:compareFilename:with:caseSensitive:

NSSavePanel

panel:isValidFilename:

NSSavePanel

panel:shouldShowFilename:

NSSavePanel

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

panel:userEnteredFilename:confirmed:

NSSavePanel

panel:willExpand:

NSSavePanel

panelConvertFont:

NSFontPanel

paperName

NSPrintInfo

paperSize

NSPrintInfo

paragraphSpacing

NSParagraphStyle

paragraphs

NSTextStorage

paramDescriptorForKeyword:

NSAppleEventDescriptor

parameterString

NSURL

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

parentWindow

NSWindow, NSDrawer

password

NSURL

paste:

NSMovieView, NSText

pasteAsPlainText:

NSTextView

pasteAsRichText:

NSTextView

pasteFont:

NSText

pasteRuler:

NSText

pasteboardByFilteringData:ofType:

NSPasteboard

pasteboardByFilteringFile:

NSPasteboard

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

pasteboardByFilteringTypesInPasteboard:

NSPasteboard

pasteboardWithName:

NSPasteboard

pasteboardWithUniqueName

NSPasteboard

path NSURL,

NSBrowser

pathComponents

NSString

pathContentOfSymbolicLinkAtPath:

NSFileManager

pathExtension

NSString

pathForAuxiliaryExecutable:

NSBundle

pathForImageResource:

NSBundle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

pathForResource:ofType:

NSBundle

pathForResource:ofType:inDirectory:

NSBundle

pathForResource:ofType:inDirectory:forLocalization:

NSBundle

pathForSoundResource:

NSBundle

pathSeparator

NSBrowser

pathToColumn:

NSBrowser

pathWithComponents:

NSString

pathsForResourcesOfType:inDirectory:

NSBundle

pathsForResourcesOfType:inDirectory:forLocalization:

NSBundle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

pathsMatchingExtensions:

NSArray

patternImage

NSColor

patternPhase

NSGraphicsContext

pause

NSSound

performActionForItemAtIndex:

NSMenu

performActionWithHighlightingForItemAtIndex:

NSMenuView

performClick:

NSButtonCell

performClickWithFrame:inView:

NSPopUpButtonCell

performClose:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

performDefaultImplementation

NSScriptCommand

performFileOperation:source:destination:files:tag:

NSWorkspace

performKeyEquivalent:

NSMenu, NSResponder, NSMatrix, NSButton, NSView

performMiniaturize:

NSWindow

performSelector:target:argument:order:modes:

NSRunLoop

performSelector:withObject:afterDelay:

NSObject

performSelector:withObject:afterDelay:inModes:

NSObject

performSelectorOnMainThread:withObject:waitUntilDone:

NSObject

performSelectorOnMainThread:withObject:waitUntilDone:modes:

NSObject

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

performZoom:

NSWindow

persistentDomainForName:

NSUserDefaults

persistentDomainNames

NSUserDefaults

pickedAllPages:

NSPrintPanel

pickedButton:

NSPrintPanel, NSPageLayout

pickedLayoutList:

NSPrintPanel

pickedOrientation:

NSPageLayout

pickedPaperSize:

NSPageLayout

pickedUnits:

NSPageLayout

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

pipe

NSPipe

pixelFormat

NSOpenGLView

pixelsHigh

NSImageRep

pixelsWide

NSImageRep

play

NSSound

playsEveryFrame

NSMovieView

playsSelectionOnly

NSMovieView

pointSize

NSFont

pointValue

NSValue

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

pointerValue

NSValue

poolCountHighWaterMark

NSAutoreleasePool

poolCountHighWaterResolution

NSAutoreleasePool

pop

NSCursor

popUpContextMenu:withEvent:forView:

NSMenu

port

NSURL, NSPort

portCoderWithReceivePort:sendPort: components:

NSPortCoder

portForName:

NSSocketPortNameServer, NSMessagePortNameServer, NSMachBootstrapServer, NSPortNameServer

portForName:host:

NSSocketPortNameServer, NSMessagePortNameServer, NSMachBootstrapServer, NSPortNameServer

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

portForName:host:nameServerPortNumber:

NSSocketPortNameServer

portWithMachPort:

NSMachPort

poseAsClass:

NSObject

positionOfGlyph:forCharacter:struckOverRect:

NSFont

positionOfGlyph:precededByGlyph:isNominal:

NSFont

positionOfGlyph:struckOverGlyph:metricsExist:

NSFont

positionOfGlyph:struckOverRect:metricsExist:

NSFont

positionOfGlyph:withRelation:toBaseGlyph:totalAdvancement:metricsExist:

NSFont

positionsForCompositeSequence:numberOfGlyphs:pointArray:

NSFont

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

positiveFormat

NSNumberFormatter

postEvent:atStart:

NSWindow, NSApplication

postNotification:

NSNotificationCenter

postNotificationName:object:

NSDistributedNotificationCenter, NSNotificationCenter

postNotificationName:object:userInfo:

NSDistributedNotificationCenter, NSNotificationCenter

postNotificationName:object:userInfo:deliverImmediately:

NSDistributedNotificationCenter

postsBoundsChangedNotifications

NSView

postsFrameChangedNotifications

NSView

precomposedStringWithCanonicalMapping

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

precomposedStringWithCompatibilityMapping

NSString

preferredEdge

NSPopUpButton, NSPopUpButtonCell, NSDrawer

preferredFilename

NSFileWrapper

preferredFontNames

NSFont

preferredLocalizations

NSBundle

preferredLocalizationsFromArray:

NSBundle

preferredLocalizationsFromArray:forPreferences:

NSBundle

preferredPasteboardTypeFromArray:restrictedToTypesFromArray:

NSTextView

prefersColorMatch

NSImage

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

prefersTrackingUntilMouseUp

NSSliderCell, NSCell

prepareGState

NSEPSImageRep

preparePageLayout:

NSDocument

prepareSavePanel:

NSDocument

prepareWithInvocationTarget:

NSUndoManager

prependTransform:

NSAffineTransform

pressure

NSEvent

preventWindowOrdering

NSApplication

principalClass

NSBundle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

print:

NSWindow, NSView

printDocument:

NSDocument

printInfo

NSPrintOperation, NSPageLayout, NSDocument

printJobTitle

NSView

printOperationWithView:

NSPrintOperation

printOperationWithView:printInfo:

NSPrintOperation

printPanel

NSPrintPanel, NSPrintOperation

printShowingPrintPanel:

NSDocument

printer

NSPrintInfo

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

printerFont

NSFont

printerNames

NSPrinter

printerTypes

NSPrinter

printerWithName:

NSPrinter

printerWithName:domain:includeUnavailable:

NSPrinter

printerWithType:

NSPrinter

printingAdjustmentInLayoutManager:forNominallySpacedGlyphRange:packedGlyphs:count:

NSTypesetter

privateFrameworksPath

NSBundle

processEditing

NSTextStorage

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

processIdentifier

NSProcessInfo, NSTask

processInfo

NSProcessInfo

processName

NSProcessInfo

prompt

NSSavePanel

propertyForKey:

NSURL, NSURLHandle

propertyForKeyIfAvailable:

NSURLHandle

propertyList

NSString

propertyList:isValidForFormat:

NSPropertyListSerialization

propertyListForType:

NSPasteboard

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

propertyListFromData:mutabilityOption:format:errorDescription:

NSPropertyListSerialization

propertyListFromStringsFileFormat

NSString

protocol

NSProtocolChecker, NSSocketPort

protocolCheckerWithTarget:protocol:

NSProtocolChecker

protocolFamily

NSSocketPort

protocolSpecificInformation

NSNetService

prototype

NSMatrix

provideNewButtonImage

NSColorPicker

proxyWithLocal:connection:

NSDistantObject

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

proxyWithTarget:connection:

NSDistantObject

publish

NSNetService

pullsDown

NSPopUpButton, NSPopUpButtonCell

punctuationCharacterSet

NSCharacterSet

purpleColor

NSColor

push

NSCursor

putCell:atRow:column:

NSMatrix

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## Q

QTMovie

NSMovie

qdPort

NSQuickDrawView

query

NSURL

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## R

RTFDFileWrapperFromRange:documentAttributes:

NSAttributedString

RTFDFromRange:

NSText

RTFDFromRange:documentAttributes:

NSAttributedString

RTFFromRange:

NSText

RTFFromRange:documentAttributes:

NSAttributedString

raise

NSException

raise:format:...

NSException

raise:format:arguments:

NSException

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

raiseBaseline:

NSTextView

rangeContainerObject

NSScriptExecutionContext

rangeForUserCharacterAttributeChange

NSTextView

rangeForUserParagraphAttributeChange

NSTextView

rangeForUserTextChange

NSTextView

rangeOfCharacterFromSet:

NSString

rangeOfCharacterFromSet:options:

NSString

rangeOfCharacterFromSet:options:range:

NSString

rangeOfComposedCharacterSequenceAtIndex:

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

rangeOfNominallySpacedGlyphsContainingIndex:

NSLayoutManager

rangeOfString:

NSString

rangeOfString:options:

NSString

rangeOfString:options:range:

NSString

rangeValue

NSValue

rate

NSMovieView

readDataOfLength:

NSFileHandle

readDataToEndOfFile

NSFileHandle

readFileContentsType:toFile:

NSPasteboard

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

readFileWrapper

NSPasteboard

readFromFile:ofType:

NSDocument

readFromURL:ofType:

NSDocument

readFromURL:options:documentAttributes:

NSMutableAttributedString

readInBackgroundAndNotify

NSFileHandle

readInBackgroundAndNotifyForModes:

NSFileHandle

readPrintInfo

NSPageLayout, NSPageLayout

readRTFDFromFile:

NSText

readSelectionFromPasteboard:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

readSelectionFromPasteboard:type:

NSTextView

readToEndOfFileInBackgroundAndNotify

NSFileHandle

readToEndOfFileInBackgroundAndNotifyForModes:

NSFileHandle

readablePasteboardTypes

NSTextView

readableTypes

NSDocument

reason

NSException

recache

NSImage

receivePort

NSPortMessage, NSConnection

receiversSpecifier

NSScriptCommand

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

recentDocumentURLs

NSDocumentController

recordDescriptor

NSAppleEventDescriptor

rect

NSCachedImageRep

rectArrayForCharacterRange:withinSelectedCharacterRange:inTextContainer:rectCount:

NSLayoutManager

rectArrayForGlyphRange:withinSelectedGlyphRange:inTextContainer:rectCount:

NSLayoutManager

rectForKey:inTable:

NSPrinter

rectForPage:

NSView

rectForPart:

NSScroller

rectOfColumn:

NSTableView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

rectOfItemAtIndex:

NSMenuView

rectOfRow:

NSTableView

rectOfTickMarkAtIndex:

NSSliderCell

rectValue

NSValue

redColor

NSColor

redComponent

NSColor

redo

NSUndoManager

redoActionName

NSUndoManager

redoMenuItemTitle

NSUndoManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

redoMenuTitleForUndoActionName:

NSUndoManager

reflectScrolledClipView:

NSScrollView, NSView

registerClassDescription:

NSScriptSuiteRegistry

registerClassDescription:forClass:

NSClassDescription

registerCoercer:selector:toConvertFromClass:toClass:

NSScriptCoercionHandler

registerCommandDescription:

NSScriptSuiteRegistry

registerDefaults:

NSUserDefaults

registerForDraggedTypes:

NSWindow

registerForServices

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

registerImageRepClass:

NSImageRep

registerLanguage:byVendor:

NSSpellServer

registerName:

NSConnection

registerName:withNameServer:

NSConnection

registerPort:name:

NSSocketPortNameServer, NSMachBootstrapServer, NSPortNameServer

registerPort:name:nameServerPortNumber:

NSSocketPortNameServer

registerServicesMenuSendTypes:returnTypes:

NSApplication

registerURLHandleClass:

NSURLHandle

registerUndoWithTarget:selector:object:

NSUndoManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

registerUnitWithName:abbreviation:unitToPointsConversionFactor:stepUpCycle:step-DownCycle:

NSRulerView

registeredImageRepClasses

NSImageRep

regularFileContents

NSFileWrapper

relativeCurveToPoint:

NSBezierPath

relativeLineToPoint:

NSBezierPath

relativeMoveToPoint:

NSBezierPath

relativePath

NSURL

relativePosition

NSRelativeSpecifier

relativeString

NSURL

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

releaseGState

NSView

releaseGlobally

NSPasteboard

reloadColumn:

NSBrowser

reloadData

NSTableView, NSComboBoxCell, NSComboBox

reloadDefaultFontFamilies

NSFontPanel

reloadItem:

NSOutlineView

reloadItem:reloadChildren:

NSOutlineView

remoteObjects

NSConnection

removeAllActions

NSUndoManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

removeAllActionsWithTarget:

NSUndoManager

removeAllItems

NSPopUpButton, NSPopUpButtonCell, NSComboBoxCell, NSComboBox

removeAllObjects

NSMutableArray, NSMutableDictionary, NSMutableSet

removeAllPoints

NSBezierPath

removeAllToolTips

NSView

removeAttribute:range:

NSMutableAttributedString

removeCharactersInRange:

NSMutableCharacterSet

removeCharactersInString:

NSMutableCharacterSet

removeChildWindow:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

removeClient:

NSURLHandle

removeColorWithKey:

NSColorList

removeColumn:

NSMatrix

removeConnection:fromRunLoop:forMode:

NSPort

removeContextHelpForObject:

NSHelpManager

removeCursorRect:cursor:

NSView

removeDecriptorAtIndex:

NSAppleEventDescriptor

removeDescriptorAtIndex:

NSAppleEventDescriptor

removeDescriptorWithKeyword:

NSAppleEventDescriptor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

removeDocument:

NSDocumentController

removeEntryAtIndex:

NSForm

removeEventHandlerForEventClass: andEventID:

NSAppleEventManager

removeFile

NSColorList

removeFileAtPath:handler:

NSFileManager

removeFileWrapper:

NSFileWrapper

removeFontTrait:

NSFontManager

removeFrameUsingName:

NSWindow

removeFromRunLoop:forMode:

NSNetServiceBrowser, NSNetService, NSPort, NSMachPort

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

removeFromSuperview

NSView

removeFromSuperviewWithoutNeedingDisplay

NSView

removeItem:

NSMenu

removeItemAtIndex:

NSPopUpButton, NSPopUpButtonCell, NSMenu, NSComboBoxCell, NSComboBox, NSToolbar

removeItemWithObjectValue:

NSComboBoxCell, NSComboBox

removeItemWithTitle:

NSPopUpButton, NSPopUpButtonCell

removeLastObject

NSMutableArray

removeLayoutManager:

NSTextStorage

removeMarker:

NSRulerView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

removeObject:

NSMutableArray, NSMutableSet, NSCountedSet

removeObject:inRange:

NSMutableArray

removeObjectAtIndex:

NSMutableArray

removeObjectForKey:

NSUserDefaults, NSMutableDictionary

removeObjectIdenticalTo:

NSMutableArray

removeObjectIdenticalTo:inRange:

NSMutableArray

removeObjectsForKeys:

NSMutableDictionary

removeObjectsFromIndices:numIndices:

NSMutableArray

removeObjectsInArray:

NSMutableArray

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

removeObjectsInRange:

NSMutableArray

removeObserver:

NSNotificationCenter

removeObserver:name:object:

NSDistributedNotificationCenter, NSNotificationCenter

removeParamDescriptorWithKeyword:

NSAppleEventDescriptor

removePersistentDomainForName:

NSUserDefaults

removePort:forMode:

NSRunLoop

removePortForName:

NSSocketPortNameServer, NSPortNameServer

removeRepresentation:

NSImage

removeRequestMode:

NSConnection

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

removeRow:

NSMatrix

removeRunLoop:

NSConnection

removeStatusItem:

NSStatusBar

removeSuiteNamed:

NSUserDefaults

removeTabStop:

NSMutableParagraphStyle

removeTabViewItem:

NSTabView

removeTableColumn:

NSTableView

removeTemporaryAttribute:forCharacterRange:

NSLayoutManager

removeTextContainerAtIndex:

NSLayoutManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

removeToolTip:

NSView

removeTrackingRect:

NSView

removeVolatileDomainForName:

NSUserDefaults

removeWindowController:

NSDocument

removeWindowsItem:

NSApplication

renewGState

NSView

renewRows:columns:

NSMatrix

replaceBytesInRange:withBytes:

NSMutableData

replaceBytesInRange:withBytes:length:

NSMutableData

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

replaceCharactersInRange:withAttributedString:

NSMutableAttributedString

replaceCharactersInRange:withRTF:

NSText

replaceCharactersInRange:withRTFD:

NSText

replaceCharactersInRange:withString:

NSMutableString, NSMutableAttributedString, NSText

replaceGlyphAtIndex:withGlyph:

NSLayoutManager

replaceLayoutManager:

NSTextContainer

replaceObject:withObject:

NSNibConnector, NSUnarchiver, NSArchiver

replaceObjectAtIndex:withObject:

NSMutableArray

replaceObjectsInRange:withObjectsFromArray:

NSMutableArray

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

replaceObjectsInRange:withObjectsFromArray:range:

NSMutableArray

replaceOccurrencesOfString:withString: options:range:

NSMutableString

replaceSubview:with:

NSView

replaceTextContainer:

NSTextView

replaceTextStorage:

NSLayoutManager

replacementObjectForArchiver:

NSObject

replacementObjectForCoder:

NSObject

replacementObjectForKeyedArchiver:

NSObject

replacementObjectForPortCoder:

NSObject

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

replyTimeout

NSConnection

replyToApplicationShouldTerminate:

NSApplication

replyWithException:

NSDistantObjectRequest

reportException:

NSApplication

representationOfImageRepsInArray:usingType:properties:

NSBitmapImageRep

representationUsingType:properties:

NSBitmapImageRep

representations

NSImage

representedFilename

NSWindow

representedObject

NSMenuItem, NSCell, NSRulerMarker

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

requestModes

NSConnection

requestTimeout

NSConnection

requestUserAttention:

NSApplication

requiredFileType

NSSavePanel

requiredThickness

NSRulerView

reservedSpaceLength

NSPort

reservedThicknessForAccessoryView

NSRulerView

reservedThicknessForMarkers

NSRulerView

reset

NSBrowserCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

resetBytesInRange:

NSMutableData

resetCursorRect:inView:

NSCell

resetCursorRects

NSWindow, NSMatrix, NSView

resetStandardUserDefaults

NSUserDefaults

resetSystemTimeZone

NSTimeZone

resetTotalAutoreleasedObjects

NSAutoreleasePool

reshape

NSOpenGLView

resignFirstResponder

NSResponder, NSTextView

resignKeyWindow

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

resignMainWindow

NSWindow

resizeFlags

NSWindow

resizeIncrements

NSWindow

resizeSubviewsWithOldSize:

NSView

resizeWithMagnification:

NSMovieView

resizeWithOldSuperviewSize:

NSView

resizedColumn

NSTableHeaderView

resolve

NSNetService

resolvedKeyDictionary

NSCreateCommand

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

resolvesAliases

NSOpenPanel

resourceData

NSURLHandle

resourceDataUsingCache:

NSURL

resourcePath

NSBundle

resourceSpecifier

NSURL

respondsToSelector:

NSProxy

restoreCachedImage

NSWindow

restoreGraphicsState

NSGraphicsContext

resume

NSSound, NSTask

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

retainArguments

NSInvocation

returnID

NSAppleEventDescriptor

returnType

NSScriptCommandDescription

reusesColumns

NSBrowser

reverseObjectEnumerator

NSArray

revertDocumentToSaved:

NSDocument

revertToSavedFromFile:ofType:

NSDocument

revertToSavedFromURL:ofType:

NSDocument

reviewUnsavedDocumentsWithAlertTitle: cancellable:

NSDocumentController

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

reviewUnsavedDocumentsWithAlertTitle:cancellable:delegate:didReviewAllSelector:contextIr

NSDocumentController

richTextSource

NSAppleScript

rightMargin

NSPrintInfo

rightMouseDown:

NSResponder

rightMouseDragged:

NSResponder

rightMouseUp:

NSResponder

rootObject

NSConnection

rootProxy

NSConnection

rootProxyForConnectionWithRegisteredName:host:

NSConnection

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

rootProxyForConnectionWithRegisteredName:host:usingNameServer:

NSConnection

rotateByAngle:

NSView

rotateByDegrees:

NSAffineTransform

rotateByRadians:

NSAffineTransform

roundingBehavior

NSNumberFormatter

rowAtPoint:

NSTableView

rowForItem:

NSOutlineView

rowHeight

NSTableView

rowsInRect:

NSTableView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

ruleThickness

NSRulerView

ruler

NSRulerMarker

rulerAccessoryViewForTextView:paragraphStyle:ruler:enabled:

NSLayoutManager

rulerAttributesInRange:

NSAttributedString

rulerMarkersForTextView:paragraphStyle:ruler:

NSLayoutManager

rulerView:didAddMarker:

NSTextView, NSRulerMarker

rulerView:didMoveMarker:

NSTextView, NSRulerMarker

rulerView:didRemoveMarker:

NSTextView, NSRulerMarker

rulerView:handleMouseDown:

NSTextView, NSRulerMarker

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

rulerView:shouldAddMarker:

NSTextView, NSRulerMarker

rulerView:shouldMoveMarker:

NSTextView, NSRulerMarker

rulerView:shouldRemoveMarker:

NSTextView, NSRulerMarker

rulerView:willAddMarker:atLocation:

NSTextView, NSRulerMarker

rulerView:willMoveMarker:toLocation:

NSTextView, NSRulerMarker

rulerView:willSetClientView:

NSRulerMarker

rulerViewClass

NSScrollView

rulersVisible

NSScrollView

run

NSApplication, NSSpellServer, NSRunLoop

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

runCustomizationPalette:

NSToolbar

runInNewThread

NSConnection

runLoopModes

NSUndoManager

runModal

NSSavePanel, NSPrintPanel, NSPageLayout

runModalForDirectory:file:

NSSavePanel

runModalForDirectory:file:relativeToWindow:

NSSavePanel

runModalForDirectory:file:types:

NSOpenPanel

runModalForDirectory:file:types:relativeToWindow:

NSOpenPanel

runModalForTypes:

NSOpenPanel

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

runModalForWindow:

NSApplication

runModalForWindow:relativeToWindow:

NSApplication

runModalOpenPanel:forTypes:

NSDocumentController

runModalPageLayoutWithPrintInfo:

NSDocument

runModalPageLayoutWithPrintInfo:delegate:didRunSelector:contextInfo:

NSDocument

runModalPrintOperation:delegate:didRunSelector:contextInfo:

NSDocument

runModalSavePanel:withAccessoryView:

NSDocument

runModalSavePanelForSaveOperation:delegate:didSaveSelector:contextInfo:

NSDocument

runModalSession:

NSApplication

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

runModalWithPrintInfo:

NSPageLayout

runMode:beforeDate:

NSRunLoop

runOperation

NSPrintOperation

runOperationModalForWindow:delegate:didRunSelector:contextInfo:

NSPrintOperation

runPageLayout:

NSApplication, NSDocument

runToolbarCustomizationPalette:

NSWindow

runUntilDate:

NSRunLoop

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## S

samplesPerPixel

NSBitmapImageRep

saturationComponent

NSColor

saveAllDocuments:

NSDocumentController

saveDocument:

NSDocument

saveDocumentAs:

NSDocument

saveDocumentTo:

NSDocument

saveDocumentWithDelegate:didSaveSelector:contextInfo:

NSDocument

saveFrameUsingName:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

saveGraphicsState

NSGraphicsContext

saveOptions

NSQuitCommand, NSCloseCommand

savePanel

NSSavePanel

saveToFile:saveOperation:delegate:didSaveSelector:contextInfo:

NSDocument

scaleBy:

NSAffineTransform

scaleUnitSquareToSize:

NSView

scaleXBy:yBy:

NSAffineTransform

scalesWhenResized

NSImage

scanCharactersFromSet:intoString:

NSScanner

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

scanDecimal:

NSScanner

scanDouble:

NSScanner

scanFloat:

NSScanner

scanHexInt:

NSScanner

scanInt:

NSScanner

scanLocation

NSScanner

scanLongLong:

NSScanner

scanString:intoString:

NSScanner

scanUpToCharactersFromSet:intoString:

NSScanner

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

scanUpToString:intoString:

NSScanner

scannerWithString:

NSScanner

scheduleInRunLoop:forMode:

NSNetServiceBrowser, NSNetService, NSPort, NSMachPort

scheduledTimerWithTimeInterval:invocation:repeats:

NSTimer

scheduledTimerWithTimeInterval:target:selector:userInfo:repeats:

NSTimer

scheme

NSURL

screen

NSWindow

screenFont

NSFont

screens

NSScreen

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

scriptErrorNumber

NSScriptCommand

scriptErrorString

NSScriptCommand

scrollBarColor

NSColor

scrollCellToVisibleAtRow:column:

NSMatrix

scrollClipView:toPoint:

NSView

scrollColumnToVisible:

NSTableView, NSBrowser

scrollColumnsLeftBy:

NSBrowser

scrollColumnsRightBy:

NSBrowser

scrollItemAtIndexToTop:

NSComboBoxCell, NSComboBox

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

scrollItemAtIndexToVisible:

NSComboBoxCell, NSComboBox

scrollLineDown:

NSResponder

scrollLineUp:

NSResponder

scrollPageDown:

NSResponder

scrollPageUp:

NSResponder

scrollPoint:

NSView

scrollRangeToVisible:

NSText

scrollRect:by:

NSView

scrollRectToVisible:

NSView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

scrollRowToVisible:

NSTableView

scrollToPoint:

NSClipView

scrollViaScroller:

NSBrowser

scrollView

NSRulerView

scrollWheel:

NSResponder, NSScrollView

scrollerWidth

NSScroller

scrollerWidthForControlSize:

NSScroller

scrollsDynamically

NSScrollView

searchForAllDomains

NSNetServiceBrowser

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

searchForRegistrationDomains

NSNetServiceBrowser

searchForServicesOfType:inDomain:

NSNetServiceBrowser

secondOfMinute

NSCalendarDate

secondarySelectedControlColor

NSColor

secondsFromGMT

NSTimeZone

secondsFromGMTForDate:

NSTimeZone

seekToEndOfFile

NSFileHandle

seekToFileOffset:

NSFileHandle

selectAll:

NSTableView, NSResponder, NSMovieView, NSMatrix, NSBrowser, NSText

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

selectCell:

NSControl

selectCellAtRow:column:

NSMatrix

selectCellWithTag:

NSMatrix

selectColumn:byExtendingSelection:

NSTableView

selectFile:inFileViewerRootedAtPath:

NSWorkspace

selectFirstTabViewItem:

NSTabView

selectItem:

NSPopUpButton, NSPopUpButtonCell

selectItemAtIndex:

NSPopUpButton, NSPopUpButtonCell, NSComboBoxCell, NSComboBox

selectItemWithObjectValue:

NSComboBoxCell, NSComboBox

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

selectItemWithTitle:

NSPopUpButton, NSPopUpButtonCell

selectKeyViewFollowingView:

NSWindow

selectKeyViewPrecedingView:

NSWindow

selectLastTabViewItem:

NSTabView

selectLine:

NSResponder

selectNextKeyView:

NSWindow

selectNextTabViewItem:

NSTabView

selectParagraph:

NSResponder

selectPreviousKeyView:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

selectPreviousTabViewItem:

NSTabView

selectRow:byExtendingSelection:

NSTableView

selectRow:inColumn:

NSBrowser

selectTabViewItem:

NSTabView

selectTabViewItemAtIndex:

NSTabView

selectTabViewItemWithIdentifier:

NSTabView

selectText:

NSSavePanel, NSMatrix, NSTextField

selectTextAtIndex:

NSForm

selectTextAtRow:column:

NSMatrix

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

selectToMark:

NSResponder

selectWithFrame:inView:editor:delegate:start:length:

NSCell

selectWord:

NSResponder

selectedCell

NSControl, NSMatrix, NSBrowser

selectedCellInColumn:

NSBrowser

selectedCells

NSMatrix, NSBrowser

selectedColumn

NSTableView, NSMatrix, NSBrowser

selectedColumnEnumerator

NSTableView

selectedControlColor

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

selectedControlTextColor

NSColor

selectedFont

NSFontManager

selectedItem

NSPopUpButton, NSPopUpButtonCell

selectedKnobColor

NSColor

selectedMenuItemColor

NSColor

selectedMenuItemTextColor

NSColor

selectedRange

NSText

selectedRow

NSTableView, NSMatrix

selectedRowEnumerator

NSTableView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

selectedRowInColumn:

NSBrowser

selectedTabViewItem

NSTabView

selectedTag

NSControl

selectedTextAttributes

NSTextView

selectedTextBackgroundColor

NSColor

selectedTextColor

NSColor

selectionAffinity

NSTextView

selectionGranularity

NSTextView

selectionRangeForProposedRange:granularity:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

selectionShouldChangeInOutlineView:

NSOutlineView

selectionShouldChangeInTableView:

NSTableView

selector

NSInvocation

selectorForCommand:

NSScriptClassDescription

sendAction

NSFontManager, NSMatrix, NSBrowser

sendAction:to:

NSControl

sendAction:to:forAllCells:

NSMatrix

sendAction:to:from:

NSApplication

sendActionOn:

NSControl, NSCell, NSStatusItem

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

sendBeforeDate:

NSPortMessage

sendBeforeDate:components:from:reserved:

NSPort

sendBeforeDate:msgid:components:from:reserved:

NSPort

sendDoubleAction

NSMatrix

sendEvent:

NSWindow, NSApplication

sendPort

NSPortMessage, NSConnection

sendsActionOnArrowKeys

NSBrowser

sendsActionOnEndEditing

NSCell

separatesColumns

NSBrowser

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

separatorItem

NSMenuItem

serializeAlignedBytesLength:

NSMutableData

serializeDataAt:ofObjCType:context:

NSMutableData

serializeInt:

NSMutableData

serializeInt:atIndex:

NSMutableData

serializeInts:count:

NSMutableData

serializeInts:count:atIndex:

NSMutableData

serializePropertyList:

NSSerializer

serializePropertyList:intoData:

NSSerializer

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

serializedRepresentation

NSFileWrapper

server

NSInputManager

servicesMenu

NSApplication

servicesProvider

NSApplication

set

NSBrowserCell, NSCursor, NSColor, NSSet, NSAffineTransform, NSFont

setAcceptsArrowKeys:

NSBrowser

setAcceptsGlyphInfo:

NSTextView

setAcceptsMouseMovedEvents:

NSWindow

setAccessoryView:

NSSavePanel, NSPrintPanel, NSPrintOperation, NSFontPanel, NSSpellChecker, NSColorPanel, NSPageLayout, NSRulerView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setAction:

NSControl, NSMenuItem, NSCell, NSFontManager, NSToolbarItem, NSActionCell, NSColorPanel NSStatusItem

setActionName:

NSUndoManager

setAlignment:

NSMutableParagraphStyle, NSControl, NSCell, NSActionCell, NSText

setAlignment:range:

NSTextView, NSMutableAttributedString

setAllowsBranchSelection:

NSBrowser

setAllowsColumnReordering:

NSTableView

setAllowsColumnResizing:

NSTableView

setAllowsColumnSelection:

NSTableView

setAllowsEditingTextAttributes:

NSCell, NSTextField

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setAllowsEmptySelection:

NSTableView, NSMatrix, NSBrowser

setAllowsFloats:

NSNumberFormatter

setAllowsMixedState:

NSCell, NSButton

setAllowsMultipleSelection:

NSOpenPanel, NSTableView, NSBrowser

setAllowsTickMarkValuesOnly:

NSSliderCell

setAllowsTruncatedLabels:

NSTabView

setAllowsUndo:

NSTextView

setAllowsUserCustomization:

NSToolbar

setAlpha:

NSImageRep

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setAlphaValue:

NSWindow

setAltIncrementValue:

NSSlider, NSSliderCell

setAlternateImage:

NSBrowserCell, NSButtonCell, NSButton

setAlternateTitle:

NSButtonCell, NSButton

setAltersStateOfSelectedItem:

NSPopUpButtonCell

setAnimationDelay:

NSProgressIndicator

setAppleMenu:

NSApplication

setApplicationIconImage:

NSApplication

setArgument:atIndex:

NSInvocation

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setArguments:

NSTask, NSScriptCommand

setArray:

NSMutableArray

setArrowPosition:

NSPopUpButtonCell

setArrowsPosition:

NSScroller

setAspectRatio:

NSWindow

setAssociatedPoints:atIndex:

NSBezierPath

setAttachmentCell:

NSTextAttachment

setAttachmentSize:forGlyphRange:

NSLayoutManager

setAttributeDescriptor:forKeyword:

NSAppleEventDescriptor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setAttributeRuns:

NSTextStorage

setAttributedAlternateTitle:

NSButtonCell, NSButton

setAttributedString:

NSMutableAttributedString

setAttributedStringForNil:

NSNumberFormatter

setAttributedStringForNotANumber:

NSNumberFormatter

setAttributedStringForZero:

NSNumberFormatter

setAttributedStringValue:

NSControl, NSCell

setAttributedTitle:

NSButtonCell, NSFormCell, NSButton, NSStatusItem

setAttributes:

NSOpenGLPixelFormat

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setAttributes:range:

NSMutableAttributedString

setAutodisplay:

NSWindow

setAutoenablesItems:

NSPopUpButton, NSPopUpButtonCell, NSMenu

setAutorepeat:

NSStepperCell, NSStepper

setAutoresizesAllColumnsToFit:

NSTableView

setAutoresizesOutlineColumn:

NSOutlineView

setAutoresizesSubviews:

NSView

setAutoresizingMask:

NSView

setAutosaveExpandedItems:

NSOutlineView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setAutosaveName:

NSTableView

setAutosaveTableColumns:

NSTableView

setAutosavesConfiguration:

NSToolbar

setAutoscroll:

NSMatrix

setAutosizesCells:

NSMatrix

setBackgroundColor:

NSImage, NSWindow, NSTextFieldCell, NSTableView, NSTextView, NSScrollView, NSClipView, NSMatrix, NSTextField, NSText

setBackgroundLayoutEnabled:

NSLayoutManager

setBackingType:

NSWindow

setBaseSpecifier:

NSRelativeSpecifier

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setBaseWritingDirection:

NSMutableParagraphStyle

setBecomesKeyOnlyIfNeeded:

NSPanel

setBezelStyle:

NSTextFieldCell, NSButtonCell, NSButton, NSTextField

setBezeled:

NSProgressIndicator, NSCell, NSForm, NSActionCell, NSTextField

setBitsPerSample:

NSImageRep

setBool:forKey:

NSUserDefaults

setBorderType:

NSBox, NSScrollView

setBordered:

NSCell, NSForm, NSButton, NSColorWell, NSActionCell, NSTextField

setBottomMargin:

NSPrintInfo

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setBounds:

NSView

setBoundsOrigin:

NSView

setBoundsRotation:

NSView

setBoundsSize:

NSView

setBoxType:

NSBox

setButtonType:

NSButtonCell, NSButton

setCacheDepthMatchesImageDepth:

NSImage

setCacheMode:

NSImage

setCachedSeparately:

NSImage

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setCachesBezierPath:

NSBezierPath

setCalendarFormat:

NSCalendarDate

setCanChooseDirectories:

NSOpenPanel

setCanChooseFiles:

NSOpenPanel

setCanHide:

NSWindow

setCanSelectHiddenExtension:

NSSavePanel

setCanSpawnSeparateThread:

NSPrintOperation

setCaseSensitive:

NSScanner

setCell:

NSControl

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setCellAttribute:to:

NSCell

setCellBackgroundColor:

NSMatrix

setCellClass:

NSControl, NSMatrix, NSBrowser

setCellPrototype:

NSBrowser

setCellSize:

NSMatrix

setCharacterIndex:forGlyphAtIndex:

NSLayoutManager

setCharacters:

NSTextStorage

setCharactersToBeSkipped:

NSScanner

setChildSpecifier:

NSScriptObjectSpecifier

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setClass:forClassName:

NSKeyed Unarchiver

setClassName:forClass:

NSKeyedArchiver

setClientView:

NSRulerView

setClip

NSBezierPath

setColor:

NSTabViewItem, NSColorWell, NSColorPanel

setColor:forKey:

NSColorList

setColorSpaceName:

NSImageRep

setCompletes:

NSComboBoxCell, NSComboBox

setCompression:factor:

NSBitmapImageRep

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setConfigurationFromDictionary:

NSToolbar

setConstrainedFrameSize:

NSTextView

setContainerClassDescription:

NSScriptObjectSpecifier

setContainerIsObjectBeingTested:

NSScriptObjectSpecifier

setContainerIsRangeContainerObject:

NSScriptObjectSpecifier

setContainerSize:

NSTextContainer

setContainerSpecifier:

NSScriptObjectSpecifier

setContentSize:

NSWindow, NSDrawer

setContentView:

NSWindow, NSBox, NSScrollView, NSDrawer

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setContentViewMargins:

NSBox

setContextHelp:forObject:

NSHelpManager

setContextHelpModeActive:

NSHelpManager

setContextMenuRepresentation:

NSMenu

setContinuous:

NSControl, NSCell, NSColorPanel

setContinuousSpellCheckingEnabled:

NSTextView

setControlSize:

NSProgressIndicator, NSCell, NSTabView, NSScroller

setControlTint:

NSProgressIndicator, NSCell, NSTabView, NSScroller

setCopiesOnScroll:

NSClipView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setCornerView:

NSTableView

setCurrentContext:

NSGraphicsContext

setCurrentDirectoryPath:

NSTask

setCurrentOperation:

NSPrintOperation

setCurrentPage:

NSPDFImageRep

setCurrentVirtualScreen:

NSOpenGLContext

setData:

NSMutableData

setData:forType:

NSPasteboard

setDataCell:

NSTableColumn

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setDataRetained:

NSImage

setDataSource:

NSTableView, NSComboBoxCell, NSComboBox

setDecimalSeparator:

NSNumberFormatter

setDefaultAttachmentScaling:

NSLayoutManager

setDefaultBehavior:

NSDecimalNumber

setDefaultButtonCell:

NSWindow

setDefaultFlatness:

NSBezierPath

setDefaultLineCapStyle:

NSBezierPath

setDefaultLineJoinStyle:

NSBezierPath

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setDefaultLineWidth:

NSBezierPath

setDefaultMiterLimit:

NSBezierPath

setDefaultNameServerPortNumber:

NSSocketPortNameServer

setDefaultPrinter:

NSPrintInfo

setDefaultTimeZone:

NSTimeZone

setDefaultWindingRule:

NSBezierPath

setDelegate:

NSImage, NSTextStorage, NSWindow, NSSavePanel, NSTableView, NSSound, NSKeyedUnarchiver, NSNetServiceBrowser, NSSplitView, NSTextView, NSNetService, NSLayoutManager, NSFontManager, NSDrawer, NSMatrix, NSApplication, NSPort, NSSpellServer, NSToolbar, NSKeyedArchiver, NSTabView, NSBrowser, NSConnection, NSTextField, NSText

setDepthLimit:

NSWindow

setDescriptor:forKeyword:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSAppleEventDescriptor

setDestination:

NSNibConnector

setDictionary:

NSMutableDictionary

setDirectParameter:

NSScriptCommand

setDirectory:

NSSavePanel

setDisplayMode:

NSToolbar

setDisplayedWhenStopped:

NSProgressIndicator

setDocument:

NSWindowController

setDocumentCursor:

NSScrollView, NSClipView

setDocumentEdited:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSWindow, NSWindowController

setDocumentView:

NSScrollView, NSClipView

setDoubleAction:

NSTableView, NSMatrix, NSBrowser

setDoubleValue:

NSProgressIndicator, NSControl, NSCell

setDrawsBackground:

NSTextFieldCell, NSTextView, NSScrollView, NSClipView, NSMatrix, NSTabView, NSTextField, NSText

setDrawsCellBackground:

NSMatrix

setDrawsGrid:

NSTableView

setDrawsOutsideLineFragment:forGlyphAtIndex:

NSLayoutManager

setDropItem:dropChildIndex:

NSOutlineView

setDropRow:dropOperation:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSTableView

setDynamicDepthLimit:

NSWindow

setEchosBullets:

NSSecureTextFieldCell

setEditable:

NSTableColumn, NSTextView, NSCell, NSMovieView, NSImageView, NSTextField, NSText

setEnabled:

NSControl, NSMenuItem, NSCell, NSFontManager, NSToolbarItem, NSFontPanel, NSActionCell, NSStatusItem

setEndSpecifier:

NSRangeSpecifier

setEndSubelementIdentifier:

NSWhoseSpecifier

setEndSubelementIndex:

NSWhoseSpecifier

setEntryType:

NSCell

setEntryWidth:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSForm

setEnvironment:

NSTask

setEvaluationErrorNumber:

NSScriptObjectSpecifier

setEventHandler:andSelector:forEventClass:andEventID:

NSAppleEventManager

setExcludedFromWindowsMenu:

NSWindow

setExtensionHidden:

NSSavePanel

setExtraLineFragmentRect:usedRect:textContainer:

NSLayoutManager

setFieldEditor:

NSTextView, NSText

setFileAttributes:

NSFileWrapper

setFileName:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSDocument

setFileType:

NSDocument

setFileWrapper:

NSTextAttachment

setFilename:

NSFileWrapper

setFireDate:

NSTimer

setFirstLineHeadIndent:

NSMutableParagraphStyle

setFlatness:

NSBezierPath

setFlipped:

NSImage

setFloat:forKey:

NSUserDefaults

setFloatValue:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSControl, NSCell

setFloatValue:knobProportion:

NSScroller

setFloatingPanel:

NSPanel

setFloatingPointFormat:left:right:

NSControl, NSCell, NSActionCell

setFocusStack:

NSGraphicsContext

setFont:

NSTextStorage, NSControl, NSButtonCell, NSCell, NSTabView, NSActionCell, NSMenuView, NSText

setFont:range:

NSText

setFontManagerFactory:

NSFontManager

setFontMenu:

NSFontManager

setFontPanelFactory:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSFontManager

setForegroundColor:

NSTextStorage

setFormat:

NSNumberFormatter

setFormatter:

NSControl, NSCell

setFrame:

NSView

setFrame:display:

NSWindow

setFrame:display:animate:

NSWindow

setFrameAutosaveName:

NSWindow

setFrameFromContentFrame:

NSBox

setFrameFromString:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSWindow

setFrameOrigin:

NSWindow, NSView

setFrameRotation:

NSView

setFrameSize:

NSView

setFrameTopLeftPoint:

NSWindow

setFrameUsingName:

NSWindow

setFrameUsingName:force:

NSWindow

setFullScreen

NSOpenGLContext

setGradientType:

NSButtonCell

setGraphicsState:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSGraphicsContext

setGridColor:

NSTableView

setGroupsByEvent:

NSUndoManager

setHasHorizontalRuler:

NSScrollView

setHasHorizontalScroller:

NSScrollView, NSBrowser

setHasShadow:

NSWindow

setHasThousandSeparators:

NSNumberFormatter

setHasUndoManager:

NSDocument

setHasVerticalRuler:

NSScrollView

setHasVerticalScroller:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSComboBoxCell, NSScrollView, NSComboBox

setHeadIndent:

NSMutableParagraphStyle

setHeaderCell:

NSTableColumn

setHeaderView:

NSTableView

setHeightTracksTextView:

NSTextContainer

setHiddenUntilMouseMoves:

NSCursor

setHidesOnDeactivate:

NSWindow

setHighlightMode:

NSStatusItem

setHighlighted: NSCell,

NSMenuItemCell

setHighlightedItemIndex:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSMenuView

setHighlightedTableColumn:

NSTableView

setHighlightsBy:

NSButtonCell

setHorizontal:

NSMenuView

setHorizontalEdgePadding:

NSMenuView

setHorizontalLineScroll:

NSScrollView

setHorizontalPageScroll:

NSScrollView

setHorizontalPagination:

NSPrintInfo

setHorizontalRulerView:

NSScrollView

setHorizontalScroller:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSScrollView

setHorizontallyCentered:

NSPrintInfo

setHorizontallyResizable:

NSText

setHostCacheEnabled:

NSHost

setHyphenationFactor:

NSLayoutManager

setIcon:

NSFileWrapper

setIdentifier:

NSTableColumn, NSTabViewItem

setIgnoredWords:inSpellDocumentWithTag:

NSSpellChecker

setIgnoresAlpha:

NSColor

setIgnoresMouseEvents:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSWindow

setIgnoresMultiClick:

NSControl

setImage:

NSSlider, NSBrowserCell, NSMenuItem, NSCell, NSToolbarItem, NSButton, NSImageView, NSRulerMarker, NSActionCell, NSStatusItem

setImageAlignment:

NSImageCell, NSImageView

setImageDimsWhenDisabled:

NSButtonCell

setImageFrameStyle:

NSImageCell, NSImageView

setImageInterpolation:

NSGraphicsContext

setImageOrigin:

NSRulerMarker

setImagePosition:

NSButtonCell, NSButton

setImageScaling:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSImageCell, NSImageView

setImportsGraphics:

NSTextView, NSCell, NSTextField, NSText

setIncrement:

NSStepperCell, NSStepper

setIndentationMarkerFollowsCell:

NSOutlineView

setIndentationPerLevel:

NSOutlineView

setIndependentConversationQueueing:

NSConnection

setIndeterminate:

NSProgressIndicator

setIndex:

NSIndexSpecifier

setIndicatorImage:inTableColumn:

NSTableView

setInitialFirstResponder:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSWindow, NSTabViewItem

setInsertionClassDescription:

NSPositionalSpecifier

setInsertionPointColor:

NSTextView

setIntAttribute:value:forGlyphAtIndex:

NSLayoutManager

setIntValue:

NSControl, NSCell

setInteger:forKey:

NSUserDefaults

setIntercellSpacing:

NSTableView, NSComboBoxCell, NSMatrix, NSComboBox

setInterfaceStyle:

NSResponder

setInterlineSpacing:

NSForm

setIsMiniaturized:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSWindow

setIsPaneSplitter:

NSSplitView

setIsVisible:

NSWindow

setIsZoomed:

NSWindow

setItemHeight:

NSComboBoxCell, NSComboBox

setJobDisposition:

NSPrintInfo

setJobStyleHint:

NSPrintPanel, NSPrintOperation

setKey:

NSScriptObjectSpecifier

setKeyEquivalent:

NSButtonCell, NSMenuItem, NSButton

setKeyEquivalentFont:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSButtonCell

setKeyEquivalentFont:size:

NSButtonCell

setKeyEquivalentModifierMask:

NSButtonCell, NSMenuItem, NSButton

setKnobThickness:

NSSlider, NSSliderCell

setLabel:

NSNibConnector, NSTabViewItem, NSToolbarItem

setLanguage:

NSSpellChecker

setLastColumn:

NSBrowser

setLaunchPath:

NSTask

setLayoutManager:

NSTextContainer

setLeadingOffset:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSDrawer

setLeaf:

NSBrowserCell

setLeftMargin:

NSPrintInfo

setLength:

NSMutableData, NSStatusItem

setLevel:

NSWindow

setLevelsOfUndo:

NSUndoManager

setLineBreakMode:

NSMutableParagraphStyle

setLineCapStyle:

NSBezierPath

setLineDash:count:phase:

NSBezierPath

setLineFragmentPadding:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSTextContainer

setLineFragmentRect:forGlyphRange:usedRect:

NSLayoutManager

setLineJoinStyle:

NSBezierPath

setLineScroll:

NSScrollView

setLineSpacing:

NSMutableParagraphStyle

setLineWidth:

NSBezierPath

setLoaded:

NSBrowserCell

setLocale:

NSScanner

setLocalizesFormat:

NSNumberFormatter

setLocation:forStartOfGlyphRange:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSLayoutManager

setLoopMode:

NSMovieView

setMainMenu:

NSApplication

setMark:

NSResponder

setMarkedTextAttributes:

NSTextView

setMarkerLocation:

NSRulerMarker

setMarkers:

NSRulerView

setMatchesOnMultipleResolution:

NSImage

setMatrixClass:

NSBrowser

setMaxContentSize:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSDrawer

setMaxSize:

NSWindow, NSToolbarItem, NSText

setMaxValue:

NSSlider, NSProgressIndicator, NSSliderCell, NSStepperCell, NSStepper

setMaxVisibleColumns:

NSBrowser

setMaxWidth:

NSTableColumn

setMaximum:

NSNumberFormatter

setMaximumLineHeight:

NSMutableParagraphStyle

setMeasurementUnits:

NSRulerView

setMenu:

NSPopUpButton, NSPopUpButtonCell, NSResponder, NSMenuItem, NSCell, NSStatusItem, NSMenuView

setMenuBarVisible:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSMenu

setMenuChangedMessagesEnabled:

NSMenu

setMenuFormRepresentation:

NSToolbarItem

setMenuItem:

NSMenuItemCell

setMenuItemCell:forItemAtIndex:

NSMenuView

setMenuRepresentation:

NSMenu

setMenuView:

NSMenuItemCell

setMenuZone:

NSMenu

setMinColumnWidth:

NSBrowser

setMinContentSize:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSDrawer

setMinSize:

NSWindow, NSToolbarItem, NSText

setMinValue:

NSSlider, NSProgressIndicator, NSSliderCell, NSStepperCell, NSStepper

setMinWidth:

NSTableColumn

setMinimum:

NSNumberFormatter

setMinimumLineHeight:

NSMutableParagraphStyle

setMiniwindowImage:

NSWindow

setMiniwindowTitle:

NSWindow

setMiterLimit:

NSBezierPath

setMixedStateImage:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSMenuItem

setMnemonicLocation:

NSMenuItem

setMode:

NSColorPicker, NSMatrix, NSColorPanel

setMovable:

NSRulerMarker

setMovableByWindowBackground:

NSWindow

setMovie:

NSMovieView

setMsgid:

NSPortMessage

setMuted:

NSMovieView

setName:

NSImage, NSSound, NSNameSpecifier

setNeedsDisplay

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSControl

setNeedsDisplay:

NSMenuItemCell, NSView

setNeedsDisplayForItemAtIndex:

NSMenuView

setNeedsDisplayInRect:

NSView

setNeedsDisplayInRect:avoidAdditionalLayout:

NSTextView

setNeedsSizing:

NSMenuItemCell, NSMenuView

setNegativeFormat:

NSNumberFormatter

setNextResponder:

NSResponder

setNextState

NSCell, NSButton

setNotShownAttribute:forGlyphAtIndex:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSLayoutManager

setNumberOfTickMarks:

NSSliderCell

setNumberOfVisibleItems:

NSComboBoxCell, NSComboBox

setObject:forKey:

NSUserDefaults, NSMutableDictionary

setObjectBeingTested:

NSScriptExecutionContext

setObjectValue:

NSControl, NSCell, NSActionCell

setObjectZone:

NSCoder, NSUnarchiver

setOffScreen:width:height:rowbytes:

NSOpenGLContext

setOffStateImage:

NSMenuItem

setOnMouseEntered:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSCursor

setOnMouseExited:

NSCursor

setOnStateImage:

NSMenuItem

setOneShot:

NSWindow

setOpaque:

NSWindow, NSImageRep

setOpenGLContext:

NSOpenGLView

setOrderedIndex:

NSWindow

setOrientation:

NSPrintInfo, NSRulerView

setOriginOffset:

NSRulerView

setOutlineTableColumn:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSOutlineView

setOutputFormat:

NSKeyedArchiver

setPageOrder:

NSPrintOperation

setPageScroll:

NSScrollView

setPaletteLabel:

NSToolbarItem

setPanelFont:isMultiple:

NSFontPanel

setPaperName:

NSPrintInfo

setPaperSize:

NSPrintInfo

setParagraphSpacing:

NSMutableParagraphStyle

setParagraphStyle:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSMutableParagraphStyle

setParagraphs:

NSTextStorage

setParamDescriptor:forKeyword:

NSAppleEventDescriptor

setParentWindow:

NSWindow, NSDrawer

setPath:

NSBrowser

setPathSeparator:

NSBrowser

setPatternPhase:

NSGraphicsContext

setPeriodicDelay:interval:

NSButtonCell, NSButton

setPersistentDomain:forName:

NSUserDefaults

setPickerMask:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSColorPanel

setPickerMode:

NSColorPanel

setPixelFormat:

NSOpenGLView

setPixelsHigh:

NSImageRep

setPixelsWide:

NSImageRep

setPlaysEveryFrame:

NSMovieView

setPlaysSelectionOnly:

NSMovieView

setPoolCountHighWaterMark:

NSAutoreleasePool

setPoolCountHighWaterResolution:

NSAutoreleasePool

setPositiveFormat:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSNumberFormatter

setPostsBoundsChangedNotifications:

NSView

setPostsFrameChangedNotifications:

NSView

setPreferredEdge:

NSPopUpButton, NSPopUpButtonCell, NSDrawer

setPreferredFilename:

NSFileWrapper

setPreferredFontNames:

NSFont

setPrefersColorMatch:

NSImage

setPrintInfo:

NSPrintOperation, NSDocument

setPrintPanel:

NSPrintOperation

setPrinter:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSPrintInfo

setProcessName:

NSProcessInfo

setPrompt:

NSSavePanel

setProperty:forKey:

NSURL

setProperty:withValue:

NSBitmapImageRep

setPropertyList:forType:

NSPasteboard

setProtocolForProxy:

NSDistantObject

setProtocolSpecificInformation:

NSNetService

setPrototype:

NSMatrix

setPullsDown:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSPopUpButton, NSPopUpButtonCell

setRangeContainerObject:

NSScriptExecutionContext

setRate:

NSMovieView

setReceiversSpecifier:

NSDeleteCommand, NSCloneCommand, NSMoveCommand, NSSetCommand, NSScriptCommand

setRelativePosition:

NSRelativeSpecifier

setReleasedWhenClosed:

NSWindow

setRemovable:

NSRulerMarker

setReplyTimeout:

NSConnection

setRepresentedFilename:

NSWindow

setRepresentedObject:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSMenuItem, NSCell, NSRulerMarker

setRequestTimeout:

NSConnection

setRequiredFileType:

NSSavePanel

setReservedThicknessForAccessoryView:

NSRulerView

setReservedThicknessForMarkers:

NSRulerView

setResizable:

NSTableColumn

setResizeIncrements:

NSWindow

setResolvesAliases:

NSOpenPanel

setResourceData:

NSURL

setReturnValue:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSInvocation

setReusesColumns:

NSBrowser

setRichText:

NSTextView, NSText

setRightMargin:

NSPrintInfo

setRootObject:

NSConnection

setRoundingBehavior:

NSNumberFormatter

setRowHeight:

NSTableView

setRuleThickness:

NSRulerView

setRulerViewClass:

NSScrollView

setRulerVisible:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSTextView

setRulersVisible:

NSScrollView

setRunLoopModes:

NSUndoManager

setScalesWhenResized:

NSImage

setScanLocation:

NSScanner

setScriptErrorNumber:

NSScriptCommand

setScriptErrorString:

NSScriptCommand

setScrollView:

NSRulerView

setScrollable:

NSCell, NSMatrix

setScrollsDynamically:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSScrollView

setSelectable:

NSTextView, NSCell, NSTextField, NSText

setSelectedFont:isMultiple:

NSFontManager

setSelectedRange:

NSTextView, NSText

setSelectedRange:affinity:stillSelecting:

NSTextView

setSelectedTextAttributes:

NSTextView

setSelectionByRect:

NSMatrix

setSelectionFrom:to:anchor:highlight:

NSMatrix

setSelectionGranularity:

NSTextView

setSelector:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSInvocation

setSendsActionOnArrowKeys:

NSBrowser

setSendsActionOnEndEditing:

NSCell

setSeparatesColumns:

NSBrowser

setServicesMenu:

NSApplication

setServicesProvider:

NSApplication

setSet:

NSMutableSet

setSharedPrintInfo:

NSPrintInfo

setSharedScriptSuiteRegistry:

NSScriptSuiteRegistry

setShouldAntialias:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSGraphicsContext

setShouldCascadeWindows:

NSWindowController

setShouldCloseDocument:

NSWindowController

setShouldCreateUI:

NSDocumentController

setShowPanels:

NSPrintOperation

setShowsAlpha:

NSColorPanel

setShowsBorderOnlyWhileMouseInside:

NSButtonCell, NSButton

setShowsControlCharacters:

NSLayoutManager

setShowsInvisibleCharacters:

NSLayoutManager

setShowsResizeIndicator:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSWindow

setShowsStateBy:

NSButtonCell

setSize:

NSImage, NSImageRep

setSizeMode:

NSToolbar

setSmartInsertDeleteEnabled:

NSTextView

setSound:

NSButtonCell, NSButton

setSource:

NSNibConnector

setStandardError:

NSTask

setStandardInput:

NSTask

setStandardOutput:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSTask

setStartSpecifier:

NSRangeSpecifier

setStartSubelementIdentifier:

NSWhoseSpecifier

setStartSubelementIndex:

NSWhoseSpecifier

setState:

NSMenuItem, NSCell, NSButton

setState:atRow:column:

NSMatrix

setString:

NSMutableString, NSText

setString:forType:

NSPasteboard

setStringValue:

NSControl, NSCell

setStyle:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSProgressIndicator

setSubmenu:

NSMenuItem

setSubmenu:forItem:

NSMenu

setSupermenu:

NSMenu

setSuspended:

NSDistributedNotificationCenter

setTabStops:

NSMutableParagraphStyle

setTabViewType:

NSTabView

setTableView:

NSTableColumn, NSTableHeaderView

setTag:

NSControl, NSMenuItem, NSCell, NSToolbarItem, NSActionCell

setTailIndent:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSMutableParagraphStyle

setTakesTitleFromPreviousColumn:

NSBrowser

setTarget:

NSControl, NSMenuItem, NSCell, NSToolbarItem, NSActionCell, NSColorPanel, NSStatusItem, NSInvocation

setTearOffMenuRepresentation:

NSMenu

setTemporaryAttributes:forCharacterRange:

NSLayoutManager

setTest:

NSWhoseSpecifier

setTextAlignment:

NSForm

setTextAttributesForNegativeValues:

NSNumberFormatter

setTextAttributesForPositiveValues:

NSNumberFormatter

setTextColor:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSTextFieldCell, NSTextField, NSText

setTextColor:range:

NSText

setTextContainer:

NSTextView

setTextContainer:forGlyphRange:

NSLayoutManager

setTextContainerInset:

NSTextView

setTextFont:

NSForm

setTextStorage:

NSLayoutManager

setTextView:

NSTextContainer

setThousandSeparator:

NSNumberFormatter

setThreadPriority:

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSThread

setTickMarkPosition:

NSSliderCell

setTimeZone:

NSCalendarDate

setTitle:

NSSlider, NSPopUpButton, NSWindow, NSSavePanel, NSPopUpButtonCell, NSMenu, NSSliderCell, NSButtonCell, NSBox, NSFormCell, NSMenuItem, NSCell, NSButton, NSStatusItem

setTitle:ofColumn:

NSBrowser

setTitleAlignment:

NSFormCell, NSForm

setTitleCell:

NSSlider, NSSliderCell

setTitleColor:

NSSlider, NSSliderCell

setTitleFont:

NSSlider, NSSliderCell, NSBox, NSFormCell, NSForm

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setTitlePosition:

NSBox

setTitleWidth:

NSFormCell

setTitleWithMnemonic:

NSMenuItem

setTitleWithRepresentedFilename:

NSWindow

setTitled:

NSBrowser

setToolTip:

NSToolbarItem, NSStatusItem, NSView

setToolTip:forCell:

NSMatrix

setToolbar:

NSWindow

setTopLevelObject:

NSScriptExecutionContext

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setTopMargin:

NSPrintInfo

setTrailingOffset:

NSDrawer

setTransformStruct:

NSAffineTransform

setTransparent:

NSButtonCell, NSButton

setTreatsFilePackagesAsDirectories:

NSSavePanel

setType:

NSCell

setTypesetter:

NSLayoutManager

setTypesetterBehavior:

NSLayoutManager

setTypingAttributes:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setUndoManager:

NSDocument

setUniqueID:

NSUniqueIDSpecifier

setUpFieldEditorAttributes:

NSTextFieldCell, NSCell

setUpGState

NSView

setUpPrintOperationDefaultValues

NSPrintInfo

setUserFixedPitchFont:

NSFont

setUserFont:

NSFont

setUsesDataSource:

NSComboBoxCell, NSComboBox

setUsesEPSOnResolutionMismatch:

NSImage

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setUsesFontPanel:

NSTextView, NSText

setUsesItemFromMenu:

NSPopUpButtonCell

setUsesRuler:

NSTextView

setUsesScreenFonts:

NSLayoutManager

setUsesThreadedAnimation:

NSProgressIndicator

setUsesUserKeyEquivalents:

NSMenuItem

setValidateSize:

NSMatrix

setValueWraps:

NSStepperCell, NSStepper

setValues:forParameter:

NSOpenGLContext

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setVersion:

NSObject

setVertical:

NSSplitView

setVerticalLineScroll:

NSScrollView

setVerticalMotionCanBeginDrag:

NSTableView

setVerticalPageScroll:

NSScrollView

setVerticalPagination:

NSPrintInfo

setVerticalRulerView:

NSScrollView

setVerticalScroller:

NSScrollView

setVerticallyCentered:

NSPrintInfo

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setVerticallyResizable:

NSText

setView:

NSOpenGLContext, NSTabViewItem, NSToolbarItem, NSStatusItem

setViewsNeedDisplay:

NSWindow

setVisible:

NSToolbar

setVolatileDomain:forName:

NSUserDefaults

setVolume:

NSMovieView

setWidth:

NSTableColumn

setWidthTracksTextView:

NSTextContainer

setWindingRule:

NSBezierPath

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setWindow:

NSWindowController, NSDocument

setWindowController:

NSWindow

setWindowFrameAutosaveName:

NSWindowController

setWindowFrameForAttachingToRect:onScreen:preferredEdge:popUpSelectedItem:

NSMenuView

setWindowsMenu:

NSApplication

setWindowsNeedUpdate:

NSApplication

setWithArray:

NSSet

setWithCapacity:

NSMutableSet

setWithObject:

NSSet

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

setWithObjects:...

NSSet

setWithObjects:count:

NSSet

setWithSet:

NSSet

setWordFieldStringValue:

NSSpellChecker

setWords:

NSTextStorage

setWorksWhenModal:

NSPanel

setWraps:

NSCell

shadowColor

NSColor

shadowWithLevel:

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

sharedAppleEventManager

NSAppleEventManager

sharedApplication

NSApplication

sharedCoercionHandler

NSScriptCoercionHandler

sharedColorPanel

NSColorPanel

sharedColorPanelExists

NSColorPanel

sharedDocumentController

NSDocumentController

sharedFontManager

NSFontManager

sharedFontPanel

NSFontPanel

sharedFontPanelExists

NSFontPanel

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

sharedFrameworksPath

NSBundle

sharedHelpManager

NSHelpManager

sharedInstance

NSSocketPortNameServer, NSSimpleHorizontalTypesetter, NSMessagePortNameServer, NSMachBootstrapServer

sharedPrintInfo

NSPrintInfo

sharedScriptExecutionContext

NSScriptExecutionContext

sharedScriptSuiteRegistry

NSScriptSuiteRegistry

sharedSpellChecker

NSSpellChecker

sharedSpellCheckerExists

NSSpellChecker

sharedSupportPath

NSBundle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

sharedSystemTypesetter

NSTypesetter

sharedSystemTypesetterForBehavior:

NSTypesetter

sharedWorkspace

NSWorkspace

shortValue

NSNumber

shouldAntialias

NSGraphicsContext

shouldBeTreatedAsInkEvent:

NSResponder

shouldCascadeWindows

NSWindowController

shouldChangePrintInfo:

NSDocument

shouldChangeTextInRange:replacementString:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

shouldCloseDocument

NSWindowController

shouldCloseWindowController:

NSDocument

shouldCloseWindowController:delegate:shouldCloseSelector:contextInfo:

NSDocument

shouldCollapseAutoExpandedItemsForDeposited:

NSOutlineView

shouldCreateUI

NSDocumentController

shouldDelayWindowOrderingForEvent:

NSView

shouldDrawColor

NSView

shouldDrawInsertionPoint

NSTextView

shouldRunSavePanelWithAccessoryView

NSDocument

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

showAttachmentCell:inRect:characterIndex:

NSLayoutManager

showContextHelp:

NSResponder

showContextHelpForObject:locationHint:

NSHelpManager

showController:adjustingSize:

NSMovieView

showGuessPanel:

NSText

showHelp:

NSApplication

showPackedGlyphs:length:glyphRange:atPoint:font:color:printingAdjustment:

NSLayoutManager

showPanels

NSPrintOperation

showPools

NSAutoreleasePool

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

showWindow:

NSWindowController

showWindows

NSDocument

showsAlpha

NSColorPanel

showsBorderOnlyWhileMouseInside

NSButtonCell, NSButton

showsControlCharacters

NSLayoutManager

showsInvisibleCharacters

NSLayoutManager

showsResizeIndicator

NSWindow

showsStateBy

NSButtonCell

size

NSImage, NSAttributedString, NSImageRep

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

sizeForKey:inTable:

NSPrinter

sizeForMagnification:

NSMovieView

sizeForPaperName:

NSPrintInfo

sizeLastColumnToFit

NSTableView

sizeMode

NSToolbar

sizeOfLabel:

NSTabViewItem

sizeOfTypesetterGlyphInfo

NSSimpleHorizontalTypesetter

sizeToCells

NSMatrix

sizeToFit

NSTableColumn, NSMenu, NSProgressIndicator, NSControl, NSBox, NSMenuView, NSText

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

sizeValue

NSValue

skipDescendents

NSDirectoryEnumerator

sleepUntilDate:

NSThread

slideImage:from:to:

NSWorkspace

smallSystemFontSize

NSFont

smallestEncoding

NSString

smartDeleteRangeForProposedRange:

NSTextView

smartInsertAfterStringForString:replacingRange:

NSTextView

smartInsertBeforeStringForString:replacingRange:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

smartInsertDeleteEnabled

NSTextView

smartInsertForString:replacingRange:beforeString:afterString:

NSTextView

socket

NSSocketPort

socketType

NSSocketPort

sortSubviewsUsingFunction:context:

NSView

sortUsingFunction:context:

NSMutableArray, NSMatrix

sortUsingSelector:

NSMutableArray, NSMatrix

sortedArrayHint

NSArray

sortedArrayUsingFunction:context:

NSArray

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

sortedArrayUsingFunction:context:hint:

NSArray

sortedArrayUsingSelector:

NSArray

sound

NSButtonCell, NSButton

sound:didFinishPlaying:

NSSound

soundNamed:

NSSound

soundUnfilteredFileTypes

NSSound

soundUnfilteredPasteboardTypes

NSSound

source

NSAppleScript, NSNibConnector

spellCheckerDocumentTag

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

spellServer:didForgetWord:inLanguage:

NSSpellServer

spellServer:didLearnWord:inLanguage:

NSSpellServer

spellServer:findMisspelledWordInString:language:wordCount:countOnly:

NSSpellServer

spellServer:suggestGuessesForWord:inLanguage:

NSSpellServer

spellingPanel

NSSpellChecker

splitView:canCollapseSubview:

NSSplitView

splitView:constrainMaxCoordinate:ofSubviewAt:

NSSplitView

splitView:constrainMinCoordinate:ofSubviewAt:

NSSplitView

splitView:constrainSplitPosition:ofSubviewAt:

NSSplitView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

splitView:resizeSubviewsWithOldSize:

NSSplitView

splitViewDidResizeSubviews:

NSSplitView

splitViewWillResizeSubviews:

NSSplitView

standardError

NSTask

standardInput

NSTask

standardOutput

NSTask

standardUserDefaults

NSUserDefaults

standardWindowButton:

NSWindow

standardWindowButton:forStyleMask:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

standardizedURL

NSURL

start:

NSMovieView

startAnimation:

NSProgressIndicator

startPeriodicEventsAfterDelay:withPeriod:

NSEvent

startSpeaking:

NSTextView

startSpecifier

NSRangeSpecifier

startSubelementIdentifier

NSWhoseSpecifier

startSubelementIndex

NSWhoseSpecifier

startTrackingAt:inView:

NSCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

state

NSMenuItem, NSCell, NSDrawer, NSButton

stateImageOffset

NSMenuView

stateImageRectForBounds:

NSMenuItemCell

stateImageWidth

NSMenuItemCell, NSMenuView

statistics

NSConnection

status

NSURLHandle

statusBar

NSStatusItem

statusForTable:

NSPrinter

statusItemWithLength:

NSStatusBar

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

stepBack:

NSMovieView

stepForward:

NSMovieView

stop

NSSound, NSNetServiceBrowser, NSNetService

stop:

NSMovieView, NSApplication

stopAnimation:

NSProgressIndicator

stopModal

NSApplication

stopModalWithCode:

NSApplication

stopPeriodicEvents

NSEvent

stopSpeaking:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

stopTracking:at:inView:mouseIsUp:

NSCell

string

NSString, NSAttributedString, NSScanner, NSText

stringArrayForKey:

NSUserDefaults

stringByAbbreviatingWithTildeInPath

NSString

stringByAppendingFormat:...

NSString

stringByAppendingPathComponent:

NSString

stringByAppendingPathExtension:

NSString

stringByAppendingString:

NSString

stringByDeletingLastPathComponent

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

stringByDeletingPathExtension

NSString

stringByExpandingTildeInPath

NSString

stringByPaddingToLength:withString:startingAtIndex:

NSString

stringByResolvingSymlinksInPath

NSString

stringByStandardizingPath

NSString

stringByTrimmingCharactersInSet:

NSString

stringForKey:

NSUserDefaults

stringForKey:inTable:

NSPrinter

stringForObjectValue:

NSFormatter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

stringForType:

NSPasteboard

stringListForKey:inTable:

NSPrinter

stringValue

NSControl, NSCell, NSAppleEventDescriptor, NSNumber, NSActionCell

stringWithCString:

NSString

stringWithCString:length:

NSString

stringWithCapacity:

NSMutableString

stringWithCharacters:length:

NSString

stringWithContentsOfFile:

NSString

stringWithContentsOfURL:

NSString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

stringWithFileSystemRepresentation:length:

NSFileManager

stringWithFormat:...

NSString

stringWithSavedFrame

NSWindow

stringWithString:

NSString

stringWithUTF8String:

NSString

stringsByAppendingPaths:

NSString

stroke

NSBezierPath

strokeLineFromPoint:toPoint:

NSBezierPath

strokeRect:

NSBezierPath

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

style

NSProgressIndicator

styleMask

NSWindow

subarrayWithRange:

NSArray

subdataWithRange:

NSData

submenu

NSMenuItem

submenuAction:

NSMenu

subpathsAtPath:

NSFileManager

subscript:

NSText

subscriptRange:

NSMutableAttributedString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

substituteFontForFont:

NSLayoutManager

substringFromIndex:

NSString

substringToIndex:

NSString

substringWithRange:

NSString

subtype

NSEvent

subviews

NSView

suiteForAppleEventCode:

NSScriptSuiteRegistry

suiteName

NSScriptClassDescription, NSScriptCommandDescription

suiteNames

NSScriptSuiteRegistry

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

superclass

NSObject

superclassDescription

NSScriptClassDescription

supermenu

NSMenu

superscript:

NSText

superscriptRange:

NSMutableAttributedString

superview

NSView

supportedWindowDepths

NSScreen

supportsCommand:

NSScriptClassDescription

suspend

NSTask

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

suspended

NSDistributedNotificationCenter

swapWithMark:

NSResponder

symbolicLinkDestination

NSFileWrapper

synchronize

NSUserDefaults

synchronizeFile

NSFileHandle

synchronizeTitleAndSelectedItem

NSPopUpButton, NSPopUpButtonCell

synchronizeWindowTitleWithDocumentName

NSWindowController

systemDefaultPortNameServer

NSPortNameServer

systemFontOfSize:

NSFont

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

systemFontSize

NSFont

systemStatusBar

NSStatusBar

systemTimeZone

NSTimeZone

systemVersion

NSCoder, NSUnarchiver

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



## T

TIFFRepresentation

NSImage, NSBitmapImageRep

TIFFRepresentationOfImageRepsInArray:

NSBitmapImageRep

TIFFRepresentationOfImageRepsInArray:usingCompression:factor:

NSBitmapImageRep

TIFFRepresentationUsingCompression:factor:

NSImage, NSBitmapImageRep

tabState

NSTabViewItem

tabStopType

NSTextTab

tabStops

NSParagraphStyle

tabView

NSTabViewItem

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

tabView:didSelectTabViewItem:

NSTabView

tabView:shouldSelectTabViewItem:

NSTabView

tabView:willSelectTabViewItem:

NSTabView

tabViewDidChangeNumberOfTabViewItems:

NSTabView

tabViewItemAtIndex:

NSTabView

tabViewItemAtPoint:

NSTabView

tabViewItems

NSTabView

tabViewType

NSTabView

tableColumnWithIdentifier:

NSTableView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

tableColumns

NSTableView

tableView

NSTableColumn, NSTableHeaderView

tableView:didClickTableColumn:

NSTableView

tableView:didDragTableColumn:

NSTableView

tableView:mouseDownInHeaderOfTableColumn:

NSTableView

tableView:shouldEditTableColumn:row:

NSTableView

tableView:shouldSelectRow:

NSTableView

tableView:shouldSelectTableColumn:

NSTableView

tableView:willDisplayCell:forTableColumn:row:

NSTableView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

tableViewColumnDidMove:

NSTableView

tableViewColumnDidResize:

NSTableView

tableViewSelectionDidChange:

NSTableView

tableViewSelectionIsChanging:

NSTableView

tag

NSControl, NSMenuItem, NSCell, NSToolbarItem, NSActionCell, NSView

tailIndent

NSParagraphStyle

takeColorFrom:

NSColorWell

takeDoubleValueFrom:

NSControl, NSCell

takeFloatValueFrom:

NSControl, NSCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

takeIntValueFrom:

NSControl, NSCell

takeObjectValueFrom:

NSControl, NSCell

takeSelectedTabViewItemFromSender:

NSTabView

takeStringValueFrom:

NSControl, NSCell

takesTitleFromPreviousColumn

NSBrowser

target

NSProtocolChecker, NSControl, NSMenuItem, NSCell, NSToolbarItem, NSActionCell, NSStatusItem, NSInvocation

targetForAction:

NSApplication

targetForAction:to:from:

NSApplication

tearOffMenuRepresentation

NSMenu

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

temporaryAttributesAtCharacterIndex:effectiveRange:

NSLayoutManager

terminate

NSTask

terminate:

NSApplication

terminationStatus

NSTask

test

NSWhoseSpecifier

testPart:

NSScroller

textAttributesForNegativeValues

NSNumberFormatter

textAttributesForPositiveValues

NSNumberFormatter

textBackgroundColor

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

textColor

NSTextFieldCell, NSColor, NSTextField, NSText

textContainer

NSTextView

textContainerChangedGeometry:

NSLayoutManager

textContainerChangedTextView:

NSLayoutManager

textContainerForGlyphAtIndex:effectiveRange:

NSLayoutManager

textContainerInset

NSTextView

textContainerOrigin

NSTextView

textContainers

NSLayoutManager

textDidBeginEditing:

NSTableView, NSMatrix, NSTextField, NSText

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

textDidChange:

NSTableView, NSMatrix, NSTextField, NSText

textDidEndEditing:

NSTableView, NSMatrix, NSTextField, NSText

textFileTypes

NSAttributedString

textPasteboardTypes

NSAttributedString

textShouldBeginEditing:

NSTableView, NSMatrix, NSTextField, NSText

textShouldEndEditing:

NSTableView, NSMatrix, NSTextField, NSText

textStorage

NSTextView, NSLayoutManager

textStorage:edited:range:changeInLength:invalidatedRange:

NSLayoutManager

textStorageDidProcessEditing:

NSTextStorage

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

textStorageWillProcessEditing:

NSTextStorage

textUnfilteredFileTypes

NSAttributedString

textUnfilteredPasteboardTypes

NSAttributedString

textView

NSTextContainer

textView:clickedOnCell:inRect:

NSTextView

textView:clickedOnCell:inRect:atIndex:

NSTextView

textView:clickedOnLink:

NSTextView

textView:clickedOnLink:atIndex:

NSTextView

textView:doCommandBySelector:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

textView:doubleClickedOnCell:inRect:

NSTextView

textView:doubleClickedOnCell:inRect:atIndex:

NSTextView

textView:draggedCell:inRect:event:

NSTextView

textView:draggedCell:inRect:event:atIndex:

NSTextView

textView:shouldChangeTextInRange:replacementString:

NSTextView

textView:willChangeSelectionFromCharacterRange:toCharacterRange:

NSTextView

textView:writablePasteboardTypesForCell:atIndex:

NSTextView

textView:writeCell:atIndex:toPasteboard:type:

NSTextView

textViewDidChangeSelection:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

textViewForBeginningOfSelection

NSLayoutManager

thickness

NSStatusBar

thicknessRequiredInRuler

NSRulerMarker

thousandSeparator

NSNumberFormatter

threadDictionary

NSThread

threadPriority

NSThread

tickMarkPosition

NSSliderCell

tickMarkValueAtIndex:

NSSliderCell

tightenKerning:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

tile

NSTableView, NSScrollView, NSBrowser

timeInterval

NSTimer

timeIntervalSince1970

NSDate

timeIntervalSinceDate:

NSDate

timeIntervalSinceNow

NSDate

timeIntervalSinceReferenceDate

NSDate

timeZone

NSCalendarDate

timeZoneForSecondsFromGMT:

NSTimeZone

timeZoneWithAbbreviation:

NSTimeZone

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

timeZoneWithName:

NSTimeZone

timeZoneWithName:data:

NSTimeZone

timerWithTimeInterval:invocation:repeats:

NSTimer

timerWithTimeInterval:target:selector:userInfo:repeats:

NSTimer

timestamp

NSEvent

title

NSSlider, NSWindow, NSSavePanel, NSMenu, NSSliderCell, NSButtonCell, NSBox, NSFormCell, NSMenuItem, NSCell, NSButton, NSStatusItem

titleAlignment

NSFormCell

titleBarFontOfSize:

NSFont

titleCell

NSSlider, NSSliderCell, NSBox

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

titleColor

NSSlider, NSSliderCell

titleFont

NSSlider, NSSliderCell, NSBox, NSFormCell

titleFrameOfColumn:

NSBrowser

titleHeight

NSBrowser

titleOfColumn:

NSBrowser

titleOfSelectedItem

NSPopUpButton, NSPopUpButtonCell

titlePosition

NSBox

titleRect

NSBox

titleRectForBounds:

NSCell, NSMenuItemCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

titleWidth

NSFormCell, NSMenuItemCell

titleWidth:

NSFormCell

toManyRelationshipKeys

NSClassDescription

toOneRelationshipKeys

NSClassDescription

toggle:

NSDrawer

toggleContinuousSpellChecking:

NSTextView

toggleRuler:

NSText

toggleToolbarShown:

NSWindow

toggleTraditionalCharacterShape:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

toolTip

NSToolbarItem, NSStatusItem, NSView

toolTipForCell:

NSMatrix

toolTipsFontOfSize:

NSFont

toolbar

NSWindow, NSToolbarItem

toolbar:itemForItemIdentifier:willBeInsertedIntoToolbar:

NSToolbar

toolbarAllowedItemIdentifiers:

NSToolbar

toolbarDefaultItemIdentifiers:

NSToolbar

toolbarDidRemoveItem:

NSToolbar

toolbarWillAddItem:

NSToolbar

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

topAutoreleasePoolCount

NSAutoreleasePool

topLevelObject

NSScriptExecutionContext

topMargin

NSPrintInfo

totalAutoreleasedObjects

NSAutoreleasePool

trackKnob:

NSScroller

trackMarker:withMouseEvent:

NSRulerView

trackMouse:adding:

NSRulerMarker

trackMouse:inRect:ofView:untilMouseUp:

NSCell

trackRect

NSSliderCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

trackScrollButtons:

NSScroller

trackWithEvent:

NSMenuView

trackingNumber

NSEvent

trailingOffset

NSDrawer

traitsOfFont:

NSFontManager

transactionID

NSAppleEventDescriptor

transform

NSAffineTransform

transformBezierPath:

NSAffineTransform

transformPoint:

NSAffineTransform

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

transformSize:

NSAffineTransform

transformStruct

NSAffineTransform

transformUsingAffineTransform:

NSBezierPath

translateOriginToPoint:

NSView

translateXBy:yBy:

NSAffineTransform

transpose:

NSResponder

transposeWords:

NSResponder

treatsFilePackagesAsDirectories

NSSavePanel

truncateFileAtOffset:

NSFileHandle

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

tryLock

NSDistributedLock, NSConditionLock, NSLock, NSRecursiveLock

tryLockWhenCondition:

NSConditionLock

tryToPerform:with:

NSWindow, NSResponder, NSApplication

turnOffKerning:

NSTextView

turnOffLigatures:

NSTextView

type

NSPrinter, NSNetService, NSCell, NSEvent

typeCodeValue

NSAppleEventDescriptor

typeForArgumentWithName:

NSScriptCommandDescription

typeForKey:

NSScriptClassDescription

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

typeFromFileExtension:

NSDocumentController

types

NSPasteboard

typesFilterableTo:

NSPasteboard

typesetter

NSLayoutManager

typesetterBehavior

NSLayoutManager

typesetterLaidOneGlyph:

NSSimpleHorizontalTypesetter

typingAttributes

NSTextView

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## U

URL

NSSavePanel, NSMovie

URL:resourceDataDidBecomeAvailable:

NSObject

URL:resourceDidFailLoadingWithReason:

NSObject

URLFromPasteboard:

NSURL

URLHandleClassForURL:

NSURLHandle

URLHandleUsingCache:

NSURL

URLResourceDidCancelLoading:

NSObject

URLResourceDidFinishLoading:

NSObject

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

URLWithString:

NSURL

URLWithString:relativeToURL:

NSURL

URLs

NSOpenPanel

URLsFromRunningOpenPanel

NSDocumentController

UTF8String

NSString

unarchiveObjectWithData:

NSKeyedUnarchiver, NSUnarchiver

unarchiveObjectWithFile:

NSKeyedUnarchiver, NSUnarchiver

unarchiver:cannotDecodeObjectOfClassName:originalClasses:

NSKeyedUnarchiver

unarchiver:didDecodeObject:

NSKeyedUnarchiver

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

unarchiver:willReplaceObject:withObject:

NSKeyedUnarchiver

unarchiverDidFinish:

NSKeyedUnarchiver

unarchiverWillFinish:

NSKeyedUnarchiver

underline:

NSText

underlineGlyphRange:underlineType:lineFragmentRect:lineFragmentGlyphRange:containerOr

NSLayoutManager

underlinePosition

NSFont

underlineThickness

NSFont

undo

NSUndoManager

undoActionName

NSUndoManager

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

undoManager

NSResponder, NSDocument

undoManagerForTextView:

NSTextView

undoMenuItemTitle

NSUndoManager

undoMenuTitleForUndoActionName:

NSUndoManager

undoNestedGroup

NSUndoManager

unhide

NSCursor

unhide:

NSApplication

unhideAllApplications:

NSApplication

unhideWithoutActivation

NSApplication

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

unionSet:

NSMutableSet

uniqueID

NSUniqueIDSpecifier

uniqueSpellDocumentTag

NSSpellChecker

unlock

NSDistributedLock

unlockFocus

NSImage, NSView

unlockWithCondition:

NSConditionLock

unmountAndEjectDeviceAtPath:

NSWorkspace

unregisterDraggedTypes

NSWindow

unregisterImageRepClass:

NSImageRep

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

unscript:

NSText

unscriptRange:

NSMutableAttributedString

unsignedCharValue

NSNumber

unsignedIntValue

NSNumber

unsignedLongLongValue

NSNumber

unsignedLongValue

NSNumber

unsignedShortValue

NSNumber

update

NSWindow, NSOpenGLView, NSMenu, NSOpenGLContext, NSMenuView

updateAttachmentsFromPath:

NSMutableAttributedString

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

updateCell:

NSControl

updateCellInside:

NSControl

updateChangeCount:

NSDocument

updateCurGlyphOffset

NSSimpleHorizontalTypesetter

updateDragTypeRegistration

NSTextView

updateFontPanel

NSTextView

updateFromPath:

NSFileWrapper

updateFromPrintInfo

NSPrintPanel

updateInsertionPointStateAndRestartTimer:

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

updateRuler

NSTextView

updateScroller

NSBrowser

updateSpellingPanelWithMisspelledWord:

NSSpellChecker

updateWindows

NSApplication

updateWindowsItem:

NSApplication

uppercaseLetterCharacterSet

NSCharacterSet

uppercaseString

NSString

uppercaseWord:

NSResponder

usableParts

NSScroller

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

useAllLigatures:

NSTextView

useFont:

NSFont

useOptimizedDrawing:

NSWindow

useStandardKerning:

NSTextView

useStandardLigatures:

NSTextView

usedRectForTextContainer:

NSLayoutManager

user

NSURL

userData

NSEvent

userDefaultsChanged

NSWorkspace

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

userFixedPitchFontOfSize:

NSFont

userFontOfSize:

NSFont

userInfo

NSException, NSTimer, NSNotification

userKeyEquivalent

NSMenuItem

usesDataSource

NSComboBoxCell, NSComboBox

usesEPSOnResolutionMismatch

NSImage

usesFontPanel

NSTextView, NSText

usesItemFromMenu

NSPopUpButtonCell

usesRuler

NSTextView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

usesScreenFonts

NSLayoutManager

usesThreadedAnimation

NSProgressIndicator

usesUserKeyEquivalents

NSMenuItem

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## V

validRequestorForSendType:returnType:

NSWindow, NSResponder, NSTextView, NSApplication

validate

NSToolbarItem

validateEditing

NSControl

validateMenuItem:

NSDocumentController, NSDocument

validateUserInterfaceItem:

NSDocumentController, NSDocument

validateVisibleColumns

NSSavePanel, NSBrowser

validateVisibleItems

NSToolbar

value:withObjCType:

NSValue

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

valueForProperty:

NSBitmapImageRep

valueWithBytes:objCType:

NSValue

valueWithNonretainedObject:

NSValue

valueWithPoint:

NSValue

valueWithPointer:

NSValue

valueWithRange:

NSValue

valueWithRect:

NSValue

valueWithSize:

NSValue

valueWraps

NSStepperCell, NSStepper

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

version

NSObject

versionForClassName:

NSCoder

verticalLineScroll

NSScrollView

verticalMotionCanBeginDrag

NSTableView

verticalPageScroll

NSScrollView

verticalPagination

NSPrintInfo

verticalRulerView

NSScrollView

verticalScroller

NSScrollView

view

NSPrintOperation, NSOpenGLContext, NSTabViewItem, NSToolbarItem, NSStatusItem

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

viewBoundsChanged:

NSClipView

viewDidEndLiveResize

NSView

viewDidMoveToSuperview

NSView

viewDidMoveToWindow

NSView

viewFrameChanged:

NSClipView

viewSizeChanged:

NSColorPicker

viewWillMoveToSuperview:

NSView

viewWillMoveToWindow:

NSView

viewWillStartLiveResize

NSView

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

viewWithTag:

NSView

viewsNeedDisplay

NSWindow

visibleFrame

NSScreen

visibleItems

NSToolbar

visibleRect

NSView

volatileDomainForName:

NSUserDefaults

volatileDomainNames

NSUserDefaults

volume

NSMovieView

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## W

waitForDataInBackgroundAndNotify

NSFileHandle

waitForDataInBackgroundAndNotifyForModes:

NSFileHandle

waitUntilExit

NSTask

wantsToDelayTextChangeNotifications

NSInputManager

wantsToHandleMouseEvents

NSInputManager

wantsToInterpretAllKeystrokes

NSInputManager

weightOfFont:

NSFontManager

whiteColor

NSColor

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

whiteComponent

NSColor

whitespaceAndNewlineCharacterSet

NSCharacterSet

whitespaceCharacterSet

NSCharacterSet

width

NSTableColumn

widthAdjustLimit

NSView

widthOfString:

NSFont

widthTracksTextView

NSTextContainer

willRemoveSubview:

NSView

willSetLineFragmentRect:forGlyphRange:usedRect:

NSSimpleHorizontalTypesetter

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

windingRule

NSBezierPath

window

NSCachedImageRep, NSWindowController, NSEvent, NSView

windowBackgroundColor

NSColor

windowController

NSWindow

windowControllerDidLoadNib:

NSDocument

windowControllerWillLoadNib:

NSDocument

windowControllers

NSDocument

windowDidBecomeKey:

NSWindow

windowDidBecomeMain:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

windowDidChangeScreen:

NSWindow

windowDidDeminiaturize:

NSWindow

windowDidEndSheet:

NSWindow

windowDidExpose:

NSWindow

windowDidLoad

NSWindowController

windowDidMiniaturize:

NSWindow

windowDidMove:

NSWindow

windowDidResignKey:

NSWindow

windowDidResignMain:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

windowDidResize:

NSWindow

windowDidUpdate:

NSWindow

windowFrameAutosaveName

NSWindowController

windowFrameColor

NSColor

windowFrameTextColor

NSColor

windowHandle

NSWindow

windowNibName

NSWindowController, NSDocument

windowNibPath

NSWindowController

windowNumber

NSWindow, NSEvent

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

windowRef

NSWindow

windowShouldClose:

NSWindow

windowShouldZoom:toFrame:

NSWindow

windowTitleForDocumentDisplayName:

NSWindowController

windowWillBeginSheet:

NSWindow

windowWillClose:

NSWindow

windowWillLoad

NSWindowController

windowWillMiniaturize:

NSWindow

windowWillMove:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

windowWillResize:toSize:

NSWindow

windowWillReturnFieldEditor:toObject:

NSWindow

windowWillReturnUndoManager:

NSWindow

windowWillUseStandardFrame:defaultFrame:

NSWindow

windowWithWindowNumber:

NSApplication

windows

NSApplication

windowsMenu

NSApplication

words

NSTextStorage

worksWhenModal

NSWindow, NSPanel, NSFontPanel

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

wraps

NSCell

writablePasteboardTypes

NSTextView

writableTypes

NSDocument

writeData:

NSFileHandle, NSURLHandle

writeEPSInsideRect:toPasteboard:

NSView

writeFileContents:

NSPasteboard

writeFileWrapper:

NSPasteboard

writePDFInsideRect:toPasteboard:

NSView

writePrintInfo

NSPageLayout, NSPageLayout

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

writeProperty:forKey:

NSURLHandle

writeRTFDToFile:atomically:

NSText

writeSelectionToPasteboard:type:

NSTextView

writeSelectionToPasteboard:types:

NSTextView

writeToFile:

NSColorList

writeToFile:atomically:

NSString, NSData, NSDictionary, NSArray

writeToFile:atomically:updateFilenames:

NSFileWrapper

writeToFile:ofType:

NSDocument

writeToFile:ofType:originalFile:saveOperation:

NSDocument

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

writeToPasteboard:

NSSound, NSColor, NSURL

writeToURL:atomically:

NSString, NSData, NSDictionary, NSArray

writeToURL:ofType:

NSDocument

writeWithBackupToFile:ofType:saveOperation:

NSDocument

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## XYZ

xHeight

NSFont

yank:

NSResponder

yearOfCommonEra

NSCalendarDate

years:months:days:hours:minutes:seconds:sinceDate:

NSCalendarDate

yellowColor

NSColor

yellowComponent

NSColor

zero

NSDecimalNumber

zoom:

NSWindow

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Part III: Appendix

Unlike the rest of the book's sections, there is only one short appendix inPart III of *Cocoa in a Nutshell*. Regardless of your experience level as a Mac developer, the*Appendix* contains valuable resources for Cocoa programmers, including details on how you can partner with Apple to market your application.

Appendix A: Resources for Cocoa Developers



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# Appendix A. Appendix: Resources for Cocoa Developers

If your mission is to produce commercial-quality software for Mac OS X, your journey can be made easier by knowing where to look for more information. This appendix lists information about the documents referred to in this book, and points you to other resources that can further help your Cocoa application development. These resources include:

- Developer documentation from Apple
- Cocoa and Mac OS X books aimed at the general programmer audience
- Articles and postings about particular Cocoa programming topics
- Cocoa developer mailing lists and newsgroups
- Partnership programs with Apple Computer



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# A.1 Apple Documentation

Many of the best resources on Cocoa development are installed on your hard drive when you install Apple's Developer Tools. These documents, mirrored online (http://developer.apple.com/techpubs), include but aren't limited to the following:

*Mac OS X Release Notes*

Updated with every release of Mac OS X, these notes are typically one step ahead of the rest o Apple's documentation. You should read through these every time you update your system so that you can stay on top of the latest changes to the system.

*/Developer/Documentation/ReleaseNotes*

*The Objective-C Programming Language*

This is the definitive reference for the Objective-C programming language, and is a must-read for all Cocoa developers. HTML and PDF versions of this document can be found on the Cocoa Documentation web site and on your system.

*/Developer/Documentation/Cocoa/ObjectiveC/ObjC.pdf*

*Foundation Reference for Objective-C*

This is a two-volume set, published by Apple through Vervanté, contains the complete reference documentation for the Foundation framework. This is the same material found online at Apple's Cocoa documentation web site, and on your hard drive as part of the developer tools installation.

*/Developer/Documentation/Cocoa/Reference/Foundation/ObjC_classic/Foundation.pdf*

*Application Kit Reference for Objective-C*

Like the Foundation Reference for Objective-C, this book is a three-volume set that contains the complete reference documentation for the Application Kit framework.

*/Developer/Documentation/Cocoa/Reference/ApplicationKit/ObjC_classic/AppKit.pdf*

*Inside Mac OS X: System Overview*

This overview of Mac OS X is valuable for anyone doing software development with Cocoa. You should read Inside Mac OS X: System Overview to familiarize yourself with the architecture of Mac OS X so you can take advantage of its design. This guide not only describes the features and capabilities of the operating system, it also describes concepts, facilities, and conventions common to the system's Carbon, Cocoa, Java, and BSD application environments.

*/Developer/Documentation/Essentials/SystemOverview/SystemOverview.pdf*

*Inside Mac OS X: Aqua Human Interface Guidelines*

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

This book, commonly referred to as "The HIG," describes how to design your application for Mac OS X's user interface (known as Aqua). The HIG provides examples of how to use such Aqua interface elements as windows, controls, dialogs, and icons so that the users of your Cocoa application will be familiar and comfortable with your product the moment they double-click its icon.

*/Developer/Documentation/Essentials/AquaHIGuidelines/AquaHIGuidelines.pdf*

*Inside Mac OS X: Performance*

This book tells you how to enhance your program to achieve maximum performance and how to use the development tools to analyze and tune your code. Topics include: managing virtual memory; accessing files efficiently; optimizing Carbon applications; building efficient C, C++, and Java code; using the Mac OS X performance measurement and analysis tools; and optimizing the in-memory layout of your program.

*/Developer/Documentation/Essentials/Performance/performance.pdf*

*Core Foundation Developer Documentation*

Cocoa is built upon the Core Foundation framework. Occasionally, you will need to use functionality at the Core Foundation level that isn't exposed in the Cocoa APIs.

*/Developer/Documentation/CoreFoundation/corefoundation_carbon.html*

If you prefer print over PDF, you can order printed, bound copies of many selected Apple documents, including the full Cocoa API reference, from Apple's print-on-demand service from Vervanté. For more information, or to order an Apple document, see:

http://www.vervante.com/apple

In total, the complete bound Objective-C references for Foundation and Application Kit span 5 volumes and nearly 3,000 pages of material.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# A.2 Related Books

Fast on the heels of the release of Mac OS X 10.0, O'Reilly began publishing a series of books as part of its ADC series, a joint-publishing agreement between Apple and O'Reilly. The books published in the ADC series are aimed at Mac OS X developers. Included in this series are several excellent Cocoa books:

*Cocoa Design Patterns*

As more users "Switch" from Unix and Windows to the Mac, programmers need to stay ahead of the curve and develop their applications using Apple's Cocoa frameworks. This book illustrates the core design patterns of Cocoa programming, and transfers knowledge about the structure and rationale of Cocoa-something that isn't covered in any other book in print. The book explains the essential patterns of objects that are used in Cocoa, and describes problems solved by Cocoa and the consequences of each solution. At the time of this writing, this book is still in development, but should be released by O'Reilly & Associates in the summer of 2003.

*Learning Cocoa with Objective-C*

Now in its second edition, *Learning Cocoa with Objective-C*, by James Duncan Davidson, is a great first book for Cocoa beginners. It eases you into the experience of Cocoa development not merely by reading, but by doing. After introductions to Project Builder and Interface Builder, you'll quickly come up to speed on the concepts of object-oriented programming with Objective-C.

*Objective-C Pocket Reference*

This small book by Andrew M. Duncan provides a quick and concise introduction to Objective-C for programmers already familiar with either C or C++. In addition to covering the essentials o Objective-C syntax, it also covers important facets of the language such as memory management, the Objective-C runtime, dynamic loading, distributed objects, and exception handling.

*Building Cocoa Applications*: *A Step-by-Step Guide*

This book by Simson Garfinkle and Michael Mahoney walks the reader through four full-fledged Cocoa applications from start to finish. In the course of each application the reader is immerse in Cocoa techniques and Mac OS X as a development platform.

In addition to *Cocoa*, there are several more books published by O'Reilly that are worth mentioning:

*Cocoa Programming for Mac OS X*

This book by Aaron Hillegass is an example driven approach to learning Cocoa that is an excellent resource for the beginning Cocoa developer.

*Cocoa Programming*

If you've tapped out all of your current Cocoa resources, consider this book to take you to the next level. This 1,200-page tome by Scott Anguish, Erik M. Buck, and Don Yacktman covers many of the less-talked-about aspects of Cocoa, including such subjects as advanced optimization and debugging techniques.

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

*Cocoa Recipes for Mac OS X*: *The Vermont Recipes*

This book by Bill Cheeseman builds a Cocoa application from start to finish with a practical step-by-step approach. Each stage of the application development is explained in clear detail.

To become an effective Cocoa programmer a thorough understanding of the C language is a must. Additionally, knowledge of object-oriented programming principles is essential. To expand the minds of all developers, Cocoa and others alike, we heartily recommend having the following books nearby:

*The C Programming Language*

To be an effective Objective-C programmer, you need to know C. This book, written by the creators of the C programming language, Kernighan and Ritchie-commonly referred to as "K&R"-is the definitive reference on the C language. Don't let the 1988 publication date deter you; this book is an essential.

*Practical C Programming*

Whenever anyone asks about books for learning C, Mike always recommends this book, which is the book he learned C from. This book covers everything that is in K&R, but from a different angle. Mike keeps both *Practical C Programming* and K&R close at hand.

*Design Patterns*

This is the book that codified what developers had known about object-oriented programming for many years prior to its publication. *Design Patterns* is hailed as a landmark book in the OOP community, and rightly so, as it defined a language for communicating ideas about OOP at a level more abstracts than level. Cocoa developers can take pride in the fact that NeXTSTEP (If you don't know the story yet, Cocoa is a direct descendent of NeXTSTEP) is cited repeatedly throughout the text for its use of design patterns.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# A.3 Web Sites

The Web provides a cornucopia of information about Cocoa (as it does about everything else). We've found it useful to use Google (http://www.google.com, or directly from the Safari web browser's interface) to provide help for the most arcane of issues, including odd compiler error messages. Just type it into the search field and go.

These are the sites that we browse most often for Cocoa information:

*Apple Developer Connection (ADC)*

Apple uses the Developer Documentation area of this web site to post new documents, and update existing ones, on a frequent basis. In addition, being an ADC member (the basic, online membership is free) gives you access to the latest Developer Tools releases.

http://developer.apple.com

*O'Reilly's Macintosh DevCenter*

Affiliated with O'Reilly & Associates, Inc., the O'Reilly Network is home to the Mac DevCenter, a hub site that offers news, FAQs, original articles, and other technical information for Mac developers and users alike.

http://www.macdevcenter.com

*MacTech magazine*

MacTech's web site contains a lot of downloadable source code and a monthly column from the print magazine that provides online technologies and resources. These resources include links to web pages, shareware archives, newsgroups, mailing lists, and castanet channels aimed at Macintosh programmers.

http://www.mactech.com

*Stepwise*

One of the original Cocoa sites, Stepwise was created as a resource for NeXTSTEP developers; it serves as an excellent resource for Cocoa and WebObjects programming.

http://www.stepwise.com

*The Vermont Recipes*

Published on Stepwise, this group of articles written by Bill Cheeseman, serves as a cookbook for developing Mac OS X applications with Cocoa using a no-nonsense, hands-on, step-by-step approach.

http://www.stepwise.com/Articles/VermontRecipes

*Cocoa Dev Central*

This site is updated fairly frequently with tips, tricks, and tutorials for novice Cocoa developers.

http://www.cocoadevcentral.com

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

*CocoaDev Wiki*

This user-editable web site is by and for the Mac OS X developer community. If you've never used the WikiWeb before, this style of site gives literally anyone the capability to view and add information on the site.

http://www.cocoadev.com

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# A.4 Mailing Lists

Many programmers find online mailing lists to be the best way to stay on top of what's fresh and new in the Cocoa community. In addition, they are an excellent place to get help on a problem; just be sure to search the archives first before asking!

*cocoa-dev*

Apple's moderated email list focused exclusively on Cocoa development issues.

http://lists.apple.com/mailman/listinfo/cocoa-dev

*projectbuilder-users*

Apple's moderated email list focused on Project Builder issues.

http://lists.apple.com/mailman/listinfo/projectbuilder-users

*macosx-dev*

This mailing list is hosted by one of the premiere Cocoa development houses, The Omni Group. This list is open to a wide variety of topics for Mac OS X developers.

http://www.omnigroup.com/developer/mailinglists/macosx-dev

*MacDev-1*

A source of news, information, updates, and special offers for Macintosh developers.

http://www.mactech.com/macdev-1

*Mamasam's Cocoa List Archive*

A browsable, searchable archive of Apple's *cocoa-dev* and The Omni Group's *macosx-dev* mailing lists.

http://cocoa.mamasam.com



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



# A.5 Partnering with Apple

Apple knows that your success is Apple's success. Apple wants developers like you to create successful applications that make customers clamor for Apple computers.

You should tap into some of the programs, products, and services offered by the Apple Developer Connection (ADC). Aimed at both large and small developers, the stated purpose of the ADC is "to help you successfully develop, test, market, and distribute software and hardware products for Apple platforms and technologies."

In addition to publishing the Developer web site at*developer.apple.com* (which includes the Cocoa Developer Documentation suite), hosting an annual Apple Worldwide Developer's Conference (WWDC), and championing developer needs to Apple's own development engineers, the ADC offers several program packages useful to you and other developers.

You should become a member of one of these programs. At the minimum, sign up for the Online program... it's free! The Online program allows you to download up-to-date development tools, gain access to certain early software releases, and receive weekly technical updates via email.

If you'd rather have this type of information mailed to you, you can pay to become an ADC Mailing customer. You'll then receive the latest in development tools, system software, development kits, and reference materials via a CD or DVD series delivered to you monthly via snail mail.

A low-cost ADC Student Program is targeted at university students around the world. ADC Student developers receive special introductory tools, access to a student community of Mac developers, and other educational opportunities, including the chance to win scholarships to the WWDC.

The priciest ADC programs are called Select and Premier. These programs offer a multitude of plush products and services, including fat discounts on Apple hardware and third-party products and services, as well as access to Apple's technical support engineers.

For information on signing up for any of these programs, go to the following URL:

http://developer.apple.com/membership

ADC members also receive discounts on O'Reilly's books and conferences. For more information about the discounts available to ADC members, go to the following URL:

http://developer.apple.com/mkt/programs/oreilly.html



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

## Colophon

Our look is the result of reader comments, our own experimentation, and feedback from distribution channels. Distinctive covers complement our distinctive approach to technical topics, breathing personality and life into potentially dry subjects.

The animal on the cover of *Cocoa in a Nutshell* is an Irish setter. Bred as a sporting dog in the 19th century, the Irish setter's agility and energy made it a prime companion for pheasant and quail hunters. By the 1890s, the dog's attractive, silky red coat and elegant build boosted its popularity as a show dog. For the past century, breeders have created a larger dog with a longer coat, with deep chestnut red or patches of red and white hair. The dog is also popular as a family pet. Described as loyal, gentle, energetic, and happy, the Irish setter gets along well with children. Some hospitals, nursing homes, and rehabilitation centers also adopt the Irish setter as a therapy dog.

Colleen Gorman was the production editor, and Colleen Gorman and Ann Schirmer were the copyeditors for *Cocoa in a Nutshell*. Mary Brady, Jane Ellin, Claire Cloutier, and Linley Dolby provided quality control. Reg Aubry wrote the index.

Emma Colby designed the cover of this book, based on a series design by Edie Freedman. The cover image is a 19th-century engraving from the Dover Pictorial Archive. Emma Colby produced the cover layout with QuarkXPress 4.1 using Adobe's ITC Garamond font.

David Futato and Bret Kerr designed the interior layout. This book was converted by Andrew Savikas to FrameMaker 5.5.6 with a format conversion tool created by Erik Ray, Jason McIntosh, Neil Walls, and Mike Sierra that uses Perl and XML technologies. The text font is Linotype Birka; the heading fon is Adobe Myriad Condensed; and the code font is LucasFont's TheSans Mono Condensed. The illustrations that appear in the book were produced by Robert Romano and Jessamyn Read using Macromedia FreeHand 9 and Adobe Photoshop 6. The tip and warning icons were drawn by Christopher Bing. This colophon was written by Ann Schirmer.

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



@private
@protected
@public



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

ABMultiValue object
ABPerson
ABRecord 2nd
ABSearchElement class
accessibility functions (Application Kit)
accessor methods
action messages
actions, defined 2nd
AddressBook framework
- access property values
- adding a record
- adding an image to a record
- comparison constants used by ABSearchElement
- create new record
- creating a vCard
- defining new properties
- getting an array of all groups
- getting an array of all people in address book
- keys of address dictionary
- notifications
- properties applicable to ABRecord objects
- property keys specific to ABPerson records
- removing a record
- saving changes to disk
- searching
- set "me"
- single- and multiple-value type properties

affine transforms 2nd
alert sheet functions
alert sound functions (Application Kit)
alloc method
API, defined
AppKit controls
Apple documentation for Cocoa
Apple Event descriptor
Apple partnering programs
AppleScript 2nd
- Make command

AppleScript Studio web site
application controls
application functions (Application Kit)
application help manager object
Application Kit
- architecture
- classes [See classes, Application Kit]
- colors
- control and cell classes

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir


data types [See data types, Application Kit]
defined
drawing and imaging classes
enumeration constants [See enumerations, Application Kit]
exceptions [See exceptions, Application Kit]
functions [See functions, Application Kit]
global variables [See variables, global, Application Kit]
protocols [See protocols, Application Kit]
application menus
application preferences
application programming interfaces [See API]
application resources
application windows
applicationDidBecomeActive: method
applicationDidFinishLaunching: method
applicationDidUnhide: method
applications
document-based
process information
quitting
applicationWillHide: method
applicationWillResignActive: method
applicationWillTerminate: method
Aqua Human Interface Guidelines
archiving 2nd
data
exception
keyed
objects
retrieving objects from
arcs
constructing
drawing
Arithmetic operations
assertion macros 2nd
assistive applications
asynchronous background socket communication
attributed string, creating 2nd
audio content, preparing
autocompletion behavior
autorelease pool 2nd


[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

base-10 arithmetic operations
Bezier
  curves
  paths
  vector-based paths
binary data
bitmapped raster images
Boolean
  expressions
  tests
bounds rectangle 2nd 3rd
  resizing
buffered communication
bundles
  defined
  functions
burn disc panel
burning data to CDs and DVDs
button control
byte ordering functions

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

calendar dates
category interface declaration
category, defined
cell classes
changing the flatness of a Bezier path
Character Palette utility
character sets, modifying contents 2nd
checking that an object conforms to a protocol
class clusters
class methods
class-cast exceptions
classes
- Application Kit
  - NSActionCell
  - NSAffineTransform
  - NSApplication [See NSApplication class]
  - NSBezierPath [See NSBezierPath class]
  - NSBitmapImageRep [See NSBitmapImageRep class]
  - NSBox
  - NSBrowser
  - NSBrowserCell
  - NSButton
  - NSButtonCell
  - NSCachedImageRep [See NSCachedImageRep class]
  - NSCell [See NSCell class]
  - NSClipView [See NSClipView class]
  - NSColor [See NSColor class]
  - NSColorList
  - NSColorPanel [See NSColorPanel class]
  - NSColorPicker
  - NSColorWell
  - NSComboBox
  - NSComboBoxCell
  - NSControl [See NSControl class]
  - NSCursor
  - NSCustomImageRep 2nd
  - NSDocument [See NSDocument class]
  - NSDocumentController [See NSDocumentController class]
  - NSDrawer
  - NSEPSImageRep
  - NSEvent [See NSEvent class]
  - NSFileWrapper
  - NSFont [See NSFont class]
  - NSFontManager
  - NSFontPanel
  - NSForm
  - NSFormCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSGlyphInfo
NSGraphicsContext [See NSGraphicsContext class]
NSHelpManager
NSImage [See NSImage class]
NSImageCell
NSImageRep [See NSImageRep class]
NSImageView
NSInputManager
NSInputServer
NSLayoutManager [See NSLayoutManager class]
NSMatrix [See NSMatrix class]
NSMenu [See NSMenu class]
NSMenuItem [See NSMenuItem class]
NSMenuItemCell
NSMenuView
NSMovie
NSMovieView
NSMutableParagraphStyle
NSNibConnector
NSNibControlConnector
NSNibOutletConnector
NSOpenGLContext
NSOpenGLPixelFormat
NSOpenGLView
NSOpenPanel
NSOutlineView [See NSOutlineView class]
NSPageLayout
NSPanel [See NSPanel class]
NSParagraphStyle
NSPasteboard [See NSPasteboard class]
NSPDFImageRep [See NSPDFImageRep class]
NSPictImageRep [See NSPictImageRep class]
NSPopUpButton
NSPopUpButtonCell
NSPrinter
NSPrintInfo [See NSPrintInfo class]
NSPrintOperation
NSPrintPanel [See NSPrintPanel class]
NSProgressIndicator
NSQuickDrawView
NSResponder [See NSResponder class]
NSRulerMarker
NSRulerView
NSSavePanel [See NSSavePanel class]
NSScreen
NSScroller
NSScrollView [See NSScrollView class]
NSSecureTextField
NSSecureTextFieldCell
NSSimpleHorizontalTypesetter
NSSlider
NSSliderCell

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSSound
NSSpellChecker
NSSplitView
NSStatusBar
NSStatusItem
NSStepper
NSStepperCell
NSTableColumn
NSTableHeaderCell
NSTableHeaderView
NSTableView
NSTabView
NSTabViewItem
NSText [See NSText class]
NSTextAttachment
NSTextAttachmentCell
NSTextContainer [See NSTextContainer class]
NSTextField
NSTextFieldCell
NSTextStorage [See NSTextStorage class]
NSTextTab
NSTextView [See NSTextView class]
NSToolbar [See NSToolbar class]
NSToolbarItem [See NSToolbarItem class]
NSTypesetter
NSView [See NSView class]
NSWindow [See NSWindow class]
NSWindowController [See NSWindowController class]
NSWorkspace [See NSWorkspace class]
defined
defining
Foundation framework
NSAppleEventDescriptor
NSAppleEventManager
NSAppleScript
NSArchiver [See NSArchiver class]
NSArray [See NSArray class]
NSAssertionHandler
NSAttributedString [See NSAttributedString class]
NSAutoreleasePool
NSBundle [See NSBundle class]
NSCalendarDate [See NSCalendarDate class]
NSCharacterSet [See NSCharacterSet class]
NSClassDescription
NSCloneCommand
NSCloseCommand
NSCoder
NSConditionLock [See NSConditionLock class]
NSConnection [See NSConnection class] 2nd
NSCountCommand
NSCountedSet
NSCreateCommand

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSData [See NSData class]
NSDate [See NSDate class]
NSDateFormatter
NSDecimalNumber [See NSDecimalNumber class]
NSDecimalNumberHandler
NSDeleteCommand
NSDeserializer
NSDictionary [See NSDictionary class]
NSDirectoryEnumerator
NSDistantObject
NSDistantObjectRequest
NSDistributedLock
NSDistributedNotificationCenter
NSEnumerator [See NSEnumerator class]
NSException
NSExistsCommand
NSFileHandle [See NSFileHandle class]
NSFileManager [See NSFileManager class]
NSGetCommand
NSHost [See NSHost class]
NSIndexSpecifier
NSInvocation
NSKeyedArchiver [See NSKeyedArchiver class]
NSKeyedUnarchiver [See NSKeyedUnarchiver class]
NSLock [See NSLock class]
NSLogicalTest
NSMachBootstrapServer
NSMachPort
NSMessagePort
NSMessagePortNameServer
NSMethodSignature
NSMiddleSpecifier
NSMoveCommand
NSMutableArray [See NSMutableArray class]
NSMutableAttributedString
NSMutableCharacterSet
NSMutableData
NSMutableDictionary
NSMutableSet
NSMutableString [See NSMutableString class]
NSNameSpecifier
NSNetService [See NSNetService class]
NSNetServiceBrowser [See NSNetServiceBrowser class]
NSNotification [See NSNotification class]
NSNotificationCenter [See NSNotificationCenter class]
NSNotificationQueue
NSNull
NSNumber [See NSNumber class]
NSNumberFormatter
NSObject
NSPipe [See NSPipe class]
NSPort

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSPortCoder [See NSPortCoder class]
NSPortMessage
NSPortNameServer
NSPositionalSpecifier
NSProcessInfo
NSPropertyListSerialization
NSPropertySpecifier
NSProtocolChecker
NSProxy
NSQuitCommand
NSRandomSpecifier
NSRangeSpecifier
NSRecursiveLock [See NSRecursiveLock class]
NSRelativeSpecifier
NSRunLoop [See NSRunLoop class]
NSScanner [See NSScanner class]
NSScriptClassDescription
NSScriptCoercionHandler
NSScriptCommand
NSScriptCommandDescription
NSScriptExecutionContext
NSScriptObjectSpecifier
NSScriptSuiteRegistry
NSScriptWhoseTest
NSSerializer
NSSet [See NSSet class]
NSSetCommand
NSSocketPort [See NSSocketPort class]
NSSocketPortNameServer
NSSpecifierTest
NSSpellServer
NSString [See NSString class]
NSTask [See NSTask class]
NSThread [See NSThread class]
NSTimer
NSTimeZone
NSUnarchiver [See NSUnarchiver class]
NSUndoManager
NSUniqueIDSpecifier
NSURL [See NSURL class]
NSURLHandle
NSUserDefaults [See NSUserDefaults class]
NSValue
NSWhoseSpecifier
immutable
implementation
interface 2nd
mutable
root class
cloning objects
Cocoa, defined
collections 2nd 3rd

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir


altering contents
dictionaries
enumerated
enumerating contents
memory management
NSArray class
NSDictionary class
NSEnumerator class
NSMutableArray class
NSSet class 2nd
range of objects within
unordered
color list
color objects, creating
color panel
color pickers 2nd
color space
classes
names global variables
color-picker panel
colors
colorspace
column display
column headers in a table view
communication
failures
interapplication
interprocess
ports 2nd
comparing objects 2nd
composite images
CompositeLab
compositing
operations and constants
concat
connecting to a remote object
Connection exception
constants
Foundation framework
NSDecimalMaxSize
NSDecimalNoScale
NSNotAnIntMapKey
NSNotAPointerMapKey
constraining a variableÕs scope
construct a complex shape using NSBezierPath
construct arcs
constructing and performing searches in the AddressBook framework
content view 2nd
contextual menus
controller, defined
coordinate system
copying a parameter to enforce encapsulation


downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

counting objects
creating an empty image data buffer
currentContext method
custom drawing code

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

data content, preparing
data display
data object, altering
data types
  Application Kit
  Foundation framework
  id
  numbers
  strings
date and time as an absolute reference 2nd
date and time classes
  NSCalendarDate
  NSDate
  NSTimeZone
dealloc method
decimal functions
defaultCenter method
defaults, user
defining a category interface
delegation, defined
deleting objects
deliverMessage: methods
design patterns
  defined
designated initializer
determinate progress indicator
dictionaries
directory contents
DiscRecording framework
  burn properties dictionary keys
  class hierarchy
  DRBurn class
  DRErase class
  DRTrack class
  preparing audio content
  preparing data content
DiscRecordingUI framework
  burn disc panel
  class hierarchy
  DRBurnProgressPanel class
  DRBurnSetupPanel class
  DREraseSetupPanel class
  erase disc panel
  using setup panels
Display Device class global variables
distributed lock object
distributed notifications

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir


- center
distributed objects 2nd
- API
- applications
- architecture
- efficiency and reliability
- threads and
Dock menu
document factory
document-based application architecture
document-based applications
domains
- defined
- persistent
- volatile
drag operations
dragging session
drawer interface
drawers 2nd
drawing and imaging
drawing and imaging classes
drawing arcs
drawing commands
drawing text
DRBurn class
DRErase class
DRTrack class
dynamic binding
- defined
- late binding vs.
dynamic typing, defined


[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

encapsulation, defined
enumerating the contents of an array
enumerations
  Application Kit
  Foundation framework 2nd
enumerators
erase disc panel
event descriptor objects
events
  functions (Application Kit)
  handling
  keyboard
  loops
  messages
  mouse
  objects
exception-handling
exceptions
  Application Kit
  Foundation class 2nd
  uncaught
executable binaries



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

File Attribute Keys global variable
file save dialog
File Type Attribute Keys global variable
Filesystem Attribute Keys global variable
filesystem interaction
fill method
first-class objects
flatness, defined
focus
font
font functions (Application Kit)
font, ligature
for-loops
Foundation framework
- classes
- defined
- functions [See functions, Foundation framework]
- protocols [See protocols, Foundation]

frame rectangle
frame, region of a superview
frameworks
- additional
- DiscRecording
- DiscRecordingUI
- Message
- Objective-C
- third-party

functions
- Application Kit
  - accessibility
  - alert sounds
  - application
  - events
  - fonts
  - graphics
  - interface style
  - OpenGL
  - panel
  - pasteboard
- Foundation
  - assertion macros
  - bundle
  - byte ordering
  - decimal
  - hash table
  - HFS file type
  - Java setup

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

map_table
memory_zones
object_allocation
Objective-C runtime
path_utilities
point
range
rect
size
uncaught_exceptions

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

General Foundation Exception Names exception
global variables, Application Kit [See variables, global, Application Kit]
glyphs
graphics contexts
  defined
  multiple
graphics functions (Application Kit)
grids



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

hasDeliveryClassBeenConfigured method
hash table functions
HFS file type functions
hierarchical data display
host name lookup
hosts



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

id data type
images
  composite
  drawing
  drawing into
immutable classes
implementation
  defined
  of a category
  of a class
indeterminate progress indicator
Info.plist file 2nd
init method
initialization method for a class
instance variables, scoping
instances
  @private
  @protected
  @public
  creating object
inter-process communication
interapplication and interthread communication
Interface Builder
  defined
interface header (.h) files
interface style functions (Application Kit)
interface, defined
Internet Assigned Numbers Authority catalog web site
IP address translation
IPC classes



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

Java Bridge
Java setup functions



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

key-value coding 2nd
  defined 2nd
key-value pairs
keyboard events
keyed archiving 2nd
  exception
keys, address dictionary
keys, defined
keys, property (AddressBook framework)
keystrokes



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

Language-Dependent Date/Time Information global variable
Language-Dependent Numeric Information global variable
late binding
layout managers
ligature, font
line
  cap style 2nd
  dashes and phase 2nd
  join style
  join styles
  width
line attributes
line movement direction
line sweep direction
loading code with NSBundle
loadNibName:owner: method
locally represent objects
lock objects
lockFocus message
locking
locks
  explained



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

Mach IPC ports
mailing lists for Cocoa developers
MainMenu.nib file
manipulating an imageÕs data on a byte level
map table functions
matrixes
measuring angles
memory management 2nd
  and collections
  in accessor methods
  web site
memory zones
menu targets
menus
menus, contextual
Message framework
  NSMailDelivery class
    deliverMessage:headers:format:protocol: method
    deliverMessage:subject:to: method
    hasDeliveryClassBeenConfigured method
messages
  arguments
  defined
  multiple arguments
  nested
  nil
  resolved into methods
  selector and target
  structure of
methods, signature
MiscKit (Object Foundation) web site
miter limit 2nd
model, defined
Model-View-Controller (MVC) design pattern 2nd
  defined
mouse cursors
mouse events 2nd
move operations
multiple-value objects
mutable copies
mutable subclass



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

naming conventions
network classes hierarchy
network domains
network services 2nd 3rd
  creating and publishing
networking
nib files
notifications 2nd 3rd
  center 2nd
    defined
  changing delivery behavior
  defined
  distributed
  observers
  removing
  suspended
NSAccessibility class
  global variables 2nd 3rd 4th 5th 6th 7th
  protocol
NSAccessibilityPostNotification function
NSAccessibilityUnignoredAncestor function
NSAccessibilityUnignoredChildren function
NSAccessibilityUnignoredChildrenForOnlyChild function
NSAccessibilityUnignoredDescendant function
NSActionCell class (Application Kit)
NSAffineTransform class 2nd
  Application Kit
NSAffineTransformStruct data type
NSAllHashTableObjects function
NSAllMapTableKeys function
NSAllMapTableValues function
NSAllocateMemoryPages function
NSAllocateObject function
NSAppleEvent Timeouts global variable
NSAppleEventDescriptor class
NSAppleEventManager class
NSAppleScript class
NSApplication class 2nd
  Application Kit
  delegate object
  enumeration
  global variables
NSApplicationLoad function
NSApplicationMain function 2nd
NSApplicationTerminateReply data type
NSArchiver class 2nd
NSArgumentDomain class

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSArray class 2nd
NSAssert function
NSAssert1 through NSAssert5 functions
NSAssertionHandler class
NSAttributedString class 2nd
  attributes
  enumeration
  global variables 2nd 3rd 4th 5th
NSAutoreleasePool class
NSAvailableWindowDepths function
NSBackingStoreType data type
NSBeep function
NSBeginAlertSheet function
NSBeginCriticalAlertSheet function
NSBeginInformationalAlertSheet function
NSBestDepth function
NSBezelStyle data type
NSBezierPath class 2nd
  Application Kit
  constructing complex shape
NSBezierPathElement data type
NSBitmapImageFileType data type
NSBitmapImageRep class
  Application Kit
  global variables
  subclass
NSBitsPerPixelFromDepth function
NSBitsPerSampleFromDepth function
NSBorderType data type
NSBox class (Application Kit)
NSBoxType data type
NSBrowser class (Application Kit)
NSBrowserCell class (Application Kit)
NSBundle class 2nd
  loading code
  loading resources
NSButton class (Application Kit)
NSButtonCell class (Application Kit)
NSButtonType data type
NSCachedImageRep class (Application Kit)
NSCachedImageRep subclass
NSCalculationError data type
NSCalendarDate class 2nd
NSCaseInsensitiveSearch
NSCAssert function
NSCAssert1 through NSCAssert5 functions
NSCell class
  Application Kit
  enumeration 2nd
  hierarchy
NSCellAttribute data type
NSCellImagePosition data type

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSCellState data type
NSCellType data type
NSChangeSpelling protocol (Application Kit)
NSCharacterCollection data type
NSCharacterSet class 2nd
NSClassDescription class
NSClassFromString function
NSClipView class
  Application Kit
NSCloneCommand class
NSCloseCommand class
NSCoder class 2nd
NSCoding protocol
NSColor class 2nd
  Application Kit
  global variables
NSColorList class (Application Kit)
NSColorPanel class
  Application Kit
  enumeration 2nd
NSColorPicker class (Application Kit)
NSColorPickingCustom protocol (Application Kit)
NSColorPickingDefault protocol (Application Kit)
NSColorSpaceFromDepth function
NSColorWell class (Application Kit)
NSComboBox class (Application Kit)
NSComboBoxCell class (Application Kit)
NSComboBoxCellDataSource protocol (Application Kit)
NSComboBoxDataSource protocol (Application Kit)
NSCompareHashTables function
NSCompareMapTables function
NSComparisonMethods protocol
NSComparisonResult data type
NSCompositingOperation data type
NSConditionLock class 2nd
NSConnection class 2nd 3rd
NSConnectionReplyMode global variable
NSContainsRect function
NSControl class
  Application Kit
  hierarchy
NSControlSize data type
NSControlTint data type
NSConvertGlyphsToPackedGlyphs function
NSConvertHostDoubleToSwapped function
NSConvertHostFloatToSwapped function
NSConvertSwappedDoubleToHost function
NSConvertSwappedFloatToHost function
NSCopyBits function
NSCopyHashTableWithZone function
NSCopying protocol
NSCopyMapTableWithZone function

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSCopyMemoryPages function
NSCopyObject function
NSCountCommand class
NSCountedSet class
NSCountHashTable function
NSCountMapTable function
NSCountWindows function
NSCountWindowsForContext function
NSCParameterAssert function
NSCreateCommand class
NSCreateFileContentsPboardType function
NSCreateFilenamePboardType function
NSCreateHashTable function
NSCreateHashTableWithZone function
NSCreateMapTable function
NSCreateMapTableWithZone function
NSCreateZone function
NSCursor class (Application Kit)
NSCustomImageRep class
  Application Kit
  subclass
NSData class 2nd
NSDate class 2nd
  convert to human-readable date and time string
NSDateFormatter class
NSDeallocateMemoryPages function
NSDeallocateObject function
NSDecimal data type
NSDecimalAdd function
NSDecimalCompact function
NSDecimalCompare function
NSDecimalCopy function
NSDecimalDivide function
NSDecimalMaxSize constant
NSDecimalMultiply function
NSDecimalMultiplyByPowerOf10 function
NSDecimalNormalize function
NSDecimalNoScale constant
NSDecimalNumber class 2nd
  exception
NSDecimalNumberBehaviors protocol
NSDecimalNumberHandler class
NSDecimalPower function
NSDecimalRound function
NSDecimalString function
NSDecimalSubtract function
NSDecrementExtraRefCountWasZero function
NSDefaultMallocZone function
NSDefaultRunLoopMode global variable
NSDeleteCommand class
NSDeserializer class
NSDictionary class 2nd

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSDirectoryEnumerator class
NSDistantObject class
NSDistantObjectRequest class
NSDistributedLock class
NSDistributedNotificationCenter class
NSDivideRect function
NSDocument class
  Application Kit
NSDocumentChangeType data type
NSDocumentController class
  Application Kit
NSDottedFrameRect function
NSDragging (Operations) enumeration
NSDraggingDestination protocol (Application Kit)
NSDraggingInfo protocol (Application Kit)
NSDraggingSource protocol (Application Kit)
NSDragOperation data type
NSDrawBitmap function
NSDrawButton function
NSDrawColorTiledRects function
NSDrawDarkBezel function
NSDrawer class
  Application Kit
NSDrawerState data type
NSDrawGrayBezel function
NSDrawGroove function
NSDrawLightBezel function
NSDrawTiledRects function
NSDrawWhiteBezel function
NSDrawWindowBackground function
NSEndHashTableEnumeration function
NSEndMapTableEnumeration function
NSEnumerateHashTable function
NSEnumerateMapTable function
NSEnumerator class 2nd
NSEPSImageRep class
  Application Kit
  subclass
NSEqualPoints function
NSEqualRanges function
NSEqualRects function
NSEqualSizes function
NSEraseRect function
NSEvent class
  Application Kit
  enumeration 2nd 3rd 4th 5th
NSEventMaskFromType function
NSEventType data type
NSException class
NSExistsCommand class
NSExtraRefCount function
NSFileHandle class 2nd 3rd

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir


client side
exception
methods
server socket communication
NSFileManager class 2nd
NSFileTypeForHFSTypeCode function
NSFileWrapper class (Application Kit)
NSFocusRingPlacement data type
NSFont class
Application Kit
enumeration
global variables 2nd
NSFontAction data type
NSFontManager class (Application Kit)
NSFontPanel class (Application Kit)
NSFontTraitMask data type
NSForm class (Application Kit)
NSFormatter class
NSFormCell class (Application Kit)
NSFrameRect function
NSFrameRectWithWidth function
NSFrameRectWithWidthUsingOperation function
NSFreeHashTable function
NSFreeMapTable function
NSFullUserName function
NSGetAlertPanel function
NSGetCommand class
NSGetCriticalAlertPanel function
NSGetFileType function
NSGetInformationalAlertPanel function
NSGetSizeAndAlignment function
NSGetUncaughtExceptionHandler function
NSGetWindowServerMemory function
NSGlobalDomain class
NSGlyph data type
enumeration
NSGlyphInfo class (Application Kit)
NSGlyphInfoAtIndex function
NSGlyphInscription data type
NSGlyphLayoutMode data type
NSGlyphRelation data type
NSGradientType data type
NSGraphics (Alpha Values) enumeration
NSGraphicsContext class
Application Kit
global variables
NSHashEnumerator data type
NSHashGet function
NSHashInsert function
NSHashInsertIfAbsent function
NSHashInsertKnownAbsent function
NSHashRemove function


downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSHashTable Callbacks global variable
NSHashTable data type
NSHashTableCallBacks data type
NSHeight function
NSHelpManager class (Application Kit)
NSHFSTypeCodeFromFileType function
NSHFSTypeOfFile function
NSHighlightRect function
NSHomeDirectory function
NSHomeDirectoryForUser function
NSHost class 2nd
NSHostByteOrder function
NSIgnoreMisspelledWords protocol (Application Kit)
NSImage class 2nd
  Application Kit
NSImageAlignment data type
NSImageCacheMode data type
NSImageCell class (Application Kit)
NSImageFrameStyle data type
NSImageInterpolation data type
NSImageLoadStatus data type
NSImageRep class 2nd
  Application Kit
  enumeration
  subclasses
NSImageRepLoadStatus data type
NSImageScaling data type
NSImageView class
  Application Kit
  subclass
NSIncrementExtraRefCount function
NSIndexSpecifier class
NSInputManager class (Application Kit)
NSInputServer class (Application Kit)
NSInputServerMouseTracker protocol (Application Kit)
NSInputServiceProvider protocol (Application Kit)
NSInsertionPosition data type
NSInsetRect function
NSIntegralRect function
NSInterfaceStyle data type 2nd
NSInterfaceStyleDefault global variables
NSIntersectionRange function
NSIntersectionRect function
NSIntersectsRect function
NSInvocation class
NSIsEmptyRect function
NSJavaBundleCleanup function
NSJavaBundleSetup function
NSJavaClassesForBundle function
NSJavaClassesFromPath function
NSJavaNeedsToLoadClasses function
NSJavaNeedsVirtualMachine function

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSJavaObjectNamedInPath function
NSJavaProvidesClasses function
NSJavaSetup
  function
  global variable
NSJavaSetupVirtualMachine function
NSKeyedArchiver class 2nd
NSKeyedUnarchiver class 2nd
NSKeyValueCoding
  protocol
NSLayoutDirection data type
NSLayoutManager class 2nd 3rd 4th
  Application Kit
NSLayoutStatus data type
NSLineBreakMode data type
NSLineCapStyle data type
NSLineJoinStyle data type
NSLineMovementDirection data type
NSLineSweepDirection data type
NSLiteralSearch
NSLocalizedString function
NSLocalizedStringFromTable function
NSLocalizedStringFromTableInBundle function
NSLocalizedStringWithDefaultValue function
NSLocalNotificationCenterType global variable
NSLocationInRange function
NSLock class 2nd 3rd
NSLocking protocol
NSLog function
NSLogicalTest class
NSLogPageSize function
NSLogv function
NSMachBootstrapServer class
NSMachPort class
NSMailDelivery class
NSMakePoint function
NSMakeRange function
NSMakeRect function
NSMakeSize function
NSMapEnumerator data type
NSMapGet function
NSMapInsert function
NSMapInsertIfAbsent function
NSMapInsertKnownAbsent function
NSMapMember function
NSMapRemove function
NSMapTable
  data type
  Key Call Backs global variable
  Value Callbacks global variable
NSMapTableKeyCallBacks data type
NSMapTableValueCallBacks data type

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSMatrix class
Application Kit
subclass
NSMatrixMode data type
NSMaxRange function
NSMaxX function
NSMaxY function
NSMenu class
Application Kit
NSMenuItem class
Application Kit
protocol
NSMenuItemCell class (Application Kit)
NSMenuValidation protocol (Application Kit)
NSMenuView class (Application Kit)
NSMessagePort class
NSMessagePortNameServer class
NSMethodSignature class
NSMiddleSpecifier class
NSMidX function
NSMidY function
NSMinX function
NSMinY function
NSModalSession data type
NSMouseInRect function
NSMoveCommand class
NSMovie class (Application Kit)
NSMovieView class (Application Kit)
NSMultibyteGlyphPacking data type
NSMutableArray class 2nd
NSMutableAttributedString class
NSMutableCharacterSet class
NSMutableCopying protocol
NSMutableData class
NSMutableDictionary class
NSMutableParagraphStyle class (Application Kit)
NSMutableSet class
NSMutableString class 2nd
appending, inserting, deleting, replacing
NSNameSpecifier class
NSNetService class 2nd
delegate methods
error codes
NSNetServiceBrowser class 2nd
NSNetServices Errors global variable
NSNetServicesError data type
NSNextHashEnumeratorItem function
NSNextMapEnumeratorPair function
NSNibAwaking protocol (Application Kit)
NSNibConnector class (Application Kit)
NSNibControlConnector class (Application Kit)
NSNibOutletConnector class (Application Kit)

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSNotAnIntMapKey constant
NSNotAPointerMapKey constant
NSNotFound
  enumeration
NSNotification class 2nd 3rd
NSNotificationCenter class 2nd 3rd
NSNotificationCoalescing data type
NSNotificationQueue class
NSNotificationSuspensionBehavior data type
NSNull class
NSNumber class 2nd
NSNumberFormatter class
NSNumberOfColorComponents function
NSObjCTypeSerializationCallBack protocol
NSObjCValue data type
NSObject class
  protocol
NSOffsetRect function
NSOpenGLContext class (Application Kit)
NSOpenGLContextAuxiliary data type
NSOpenGLContextParameter data type
NSOpenGLGetOption function
NSOpenGLGetVersion function
NSOpenGLGlobalOption data type
NSOpenGLPixelFormat class (Application Kit)
NSOpenGLPixelFormatAttribute data type
NSOpenGLPixelFormatAuxiliary data type
NSOpenGLSetOption function
NSOpenGLView class (Application Kit)
NSOpenPanel class (Application Kit)
NSOpenStepRootDirectory function
NSOpenStepUnicodeReservedBase enumeration
NSOutlineView class
  Application Kit
  enumeration
NSOutlineViewDataSource protocol (Application Kit)
NSPageLayout class (Application Kit)
NSPageSize function
NSPanel class
  Application Kit
  enumeration 2nd 3rd
NSParagraphStyle class (Application Kit)
NSParameterAssert function
NSPasteboard class
  Application Kit
  global variables 2nd 3rd
NSPDFImageRep
  subclass
NSPDFImageRep class
  Application Kit
NSPerformService function
NSPictImageRep

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir


subclass
NSPictImageRep class
Application Kit
NSPipe class 2nd
NSPlanarFromDepth function
NSPoint data type 2nd
NSPointArray data type
NSPointFromString function
NSPointInRect function
NSPointPointer data type
NSPopUpArrowPosition data type
NSPopUpButton class (Application Kit)
NSPopUpButtonCell class (Application Kit)
NSPort class
NSPortCoder class 2nd
NSPortMessage class
NSPortNameServer class
NSPositionalSpecifier class
NSPostingStyle data type
NSPrinter class (Application Kit)
NSPrinterTableStatus data type
NSPrintInfo class
Application Kit
global variables
NSPrintingOrientation data type
NSPrintingPageOrder data type
NSPrintingPaginationMode data type
NSPrintOperation class (Application Kit)
NSPrintPanel class
Application Kit
global variables
NSProcessInfo class 2nd
enumeration
NSProgressIndicator class (Application Kit)
NSProgressIndicatorStyle data type
NSProgressIndicatorThickness data type
NSPropertyListFormat data type
NSPropertyListMutabilityOptions data type
NSPropertyListSerialization class
NSPropertySpecifier class
NSProtocolChecker class
NSProxy class
NSQTMovieLoopMode data type
NSQuickDrawView class (Application Kit)
NSQuitCommand class
NSRandomSpecifier class
NSRange data type 2nd 3rd
NSRangeFromString function
NSRangePointer data type
NSRangeSpecifier class
NSReadPixel function
NSRealMemoryAvailable function


downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSRect data type 2nd
NSRectArray data type
NSRectClip function
NSRectClipList function
NSRectEdge data type
NSRectFill function
NSRectFillList function
NSRectFillListUsingOperation function
NSRectFillListWithColors function
NSRectFillListWithColorsUsingOperation function
NSRectFillListWithGrays function
NSRectFillUsingOperation function
NSRectFromString function
NSRectPointer data type
NSRecursiveLock class 2nd
NSRecycleZone function
NSRegisterServicesProvider function
NSRegistrationDomain class
NSRelativePosition data type
NSRelativeSpecifier class
NSReleaseAlertPanel function
NSRequestUserAttentionType data type
NSResetHashTable function
NSResetMapTable function
NSResponder
NSResponder class 2nd
  Application Kit
NSReturnAddress function
NSRoundDownToMultipleOfPageSize function
NSRoundingMode data type
NSRoundUpToMultipleOfPageSize function
NSRulerMarker class (Application Kit)
NSRulerOrientation data type
NSRulerView class (Application Kit)
NSRunAlertPanel function
NSRunCriticalAlertPanel function
NSRunInformationalAlertPanel function
NSRunLoop class 2nd
  enumeration 2nd
  global variables
NSSaveOperationType data type
NSSaveOptions data type
NSSavePanel class
  Application Kit
  enumeration
NSScanner class 2nd
NSScreen class (Application Kit)
NSScreenAuxiliaryOpaque data type
NSScriptClassDescription class
NSScriptCoercionHandler class
NSScriptCommand class
  enumeration

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSScriptCommandDescription class
NSScriptExecutionContext class
NSScriptingComparisonMethods protocol
NSScriptKeyValueCoding
  exception
  protocol
NSScriptObjectSpecifier class
  enumeration
NSScriptObjectSpecifiers protocol
NSScriptSuiteRegistry class
NSScriptWhoseTest class
NSScrollArrowPosition data type
NSScroller class (Application Kit)
NSScrollerArrow data type
NSScrollerPart data type
NSScrollView class
  Application Kit
NSSearchPathDirectory data type
NSSearchPathDomainMask data type
NSSearchPathForDirectoriesInDomains function
NSSecureTextField class (Application Kit)
NSSecureTextFieldCell class (Application Kit)
NSSelectionAffinity data type
NSSelectionDirection data type
NSSelectionGranularity data type
NSSelectorFromString function
NSSerializer class
NSServicesRequests protocol (Application Kit)
NSSet class 2nd 3rd
NSSetCommand class
NSSetFocusRingStyle function
NSSetShowsServicesMenuItem function
NSSetUncaughtExceptionHandler function
NSSetZoneName function
NSShouldRetainWithZone function
NSShowsServicesMenuItem function
NSSimpleHorizontalTypesetter class (Application Kit)
NSSize data type 2nd
NSSizeArray data type
NSSizeFromString function
NSSizePointer data type
NSSlider class (Application Kit)
NSSliderCell class (Application Kit)
NSSocketPort class 2nd
NSSocketPortNameServer class
NSSound class (Application Kit)
NSSpecifierTest class
NSSpellChecker class (Application Kit)
NSSpellServer class
NSSplitView class (Application Kit)
NSStatusBar class (Application Kit)
NSStatusItem class (Application Kit)

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSStepper class (Application Kit)
NSStepperCell class (Application Kit)
NSString class 2nd 3rd
- append a format
- append a string
- check for prefix or suffix
- comparing strings
- create a string using printf style formatting
- create a string with a character array
- create one string from another string
- determine the length of a string
- extract strings
- get a C string from
- handling exception
- initializing
- literal syntax
- release
- retain
- return 6 characters starting at index 7
- return capitalization
- return characters from beginning to character 5
- return lowercase
- return uppercase
- search substrings
- Unicode and
- using text file to initialize a string

NSStringEncoding data type
NSStringFromClass function
NSStringFromHashTable function
NSStringFromMapTable function
NSStringFromPoint function
NSStringFromRange function
NSStringFromRect function
NSStringFromSelector function
NSStringFromSize function
NSSwapBigDoubleToHost function
NSSwapBigFloatToHost function
NSSwapBigIntToHost function
NSSwapBigLongLongToHost function
NSSwapBigLongToHost function
NSSwapBigShortToHost function
NSSwapDouble function
NSSwapFloat function
NSSwapHostDoubleToBig function
NSSwapHostDoubleToLittle function
NSSwapHostFloatToBig function
NSSwapHostFloatToLittle function
NSSwapHostIntToBig function
NSSwapHostIntToLittle function
NSSwapHostLongLongToBig function
NSSwapHostLongLongToLittle function
NSSwapHostLongToBig function

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSSwapHostLongToLittle function
NSSwapHostShortToBig function
NSSwapHostShortToLittle function
NSSwapInt function
NSSwapLittleDoubleToHost function
NSSwapLittleFloatToHost function
NSSwapLittleIntToHost function
NSSwapLittleLongLongToHost function
NSSwapLittleLongToHost function
NSSwapLittleShortToHost function
NSSwapLong function
NSSwapLongLong function
NSSwappedDouble data type
NSSwappedFloat data type
NSSwapShort function
NSTableColumn class (Application Kit)
NSTableDataSource protocol (Application Kit)
NSTableHeaderCell class (Application Kit)
NSTableHeaderView class (Application Kit)
NSTableView class (Application Kit)
NSTableViewDropOperation data type
NSTabState data type
NSTabView class (Application Kit)
NSTabViewItem class (Application Kit)
NSTabViewItemAuxiliaryOpaque data type
NSTabViewType data type
NSTask class 2nd
NSTemporaryDirectory function
NSTestComparisonOperation data type
NSText class
  Application Kit
  enumeration 2nd
NSTextAlignment data type
NSTextAttachment (Attachment Character) enumeration
NSTextAttachment class (Application Kit)
NSTextAttachmentCell class (Application Kit)
NSTextAttachmentCell protocol (Application Kit)
NSTextContainer class 2nd 3rd
  Application Kit
NSTextField class (Application Kit)
NSTextFieldBezelStyle data type
NSTextFieldCell class (Application Kit)
NSTextInput protocol (Application Kit)
NSTextStorage class 2nd 3rd
  Application Kit
  enumeration
NSTextStorage subclass
NSTextStorageScripting protocol (Application Kit)
NSTextTab class (Application Kit)
NSTextTabType data type
NSTextView class 2nd
  Application Kit

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSThread class 2nd
sleepUntilDate: method
NSTickMarkPosition data type
NSTIFFCompression data type
NSTimeInterval data type
NSTimer class
NSTimeZone class 2nd
NSTitlePosition data type
NSToolbar class
Application Kit
NSToolbarDisplayMode data type
NSToolbarItem class
Application Kit
global variables
NSToolbarItemValidation protocol (Application Kit)
NSToolbarSizeMode data type
NSToolTipOwner protocol (Application Kit)
NSToolTipTag data type
NSTrackingRectTag data type
NSTypesetter class (Application Kit)
NSTypesetterBehavior data type
NSTypesetterGlyphInfo data type
NSUnarchiver class 2nd
NSUncaughtExceptionHandler data type
NSUndoCloseGroupingRunLoopOrdering enumeration
NSUndoManager class
NSUnionRange function
NSUnionRect function
NSUniqueIDSpecifier class
NSUnRegisterServicesProvider function
NSUpdateDynamicServices function
NSURL class 2nd 3rd
global variable
methods
NSURLHandle class 2nd 3rd
NSURLHandle FTP Property Keys global variable
NSURLHandle HTTP Property Keys global variable
NSURLHandleClient protocol
NSURLHandleStatus data type
NSUsableScrollerParts data type
NSUserDefaults class 2nd
global variable
NSUserInterfaceValidations protocol (Application Kit)
NSUserName function
NSValidatedUserInterfaceItem protocol (Application Kit)
NSValue class
NSView class 2nd 3rd
Application Kit
enumeration
NSWhoseSpecifier class
NSWhoseSubelementIdentifier data type
NSWidth function

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

NSWindingRule data type
NSWindow class 2nd
Application Kit
enumeration
global variables 2nd
NSWindowAuxiliaryOpaque data type
NSWindowButton data type
NSWindowController class
Application Kit
NSWindowDepth data type
NSWindowList function
NSWindowListForContext function
NSWindowOrderingMode data type
NSWindowScripting protocol (Application Kit)
NSWorkspace class
Application Kit
global variables 2nd
NSWritingDirection data type
NSZone data type
NSZoneCalloc function
NSZoneFree function
NSZoneFromPointer function
NSZoneMalloc function
NSZoneName function
NSZoneRealloc function
number precision
numeric data types

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



object allocation functions
object specifiers, defined
object tree
object-oriented programming (OOP)
Objective-C 2nd
  naming conventions
  runtime functions
objects
  archiving 2nd
  arrays
  checking that conforms to protocol
  cloned
  closing
  collection 2nd
  comparing 2nd
  copying
  counting
  creating instances
  data, altering
  deallocating
  defined
  deleting
  distributed 2nd
  distributed, threads and
  first-class
  help manager
  locally representing
  lock
  modifying sets
  multiple-value
  mutable copies
  ordered collections
  paragraph style
  property list 2nd
  proxies
  proxy for
  remote, connecting to
  scanner
  used by multiple applications
observers (notification center)
Omni Frameworks
  OmniAppKit
  OmniBase
  OmniFoundation
  OmniHTML
  OmniNetworking
  OWF

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

Omni Group, The web site
Open panel
OpenGL API
OpenGL functions (Application Kit)
outlets
    actions and
    defined 2nd
outline view
overriding a superclass method

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

Page Layout panel
page-view
paginating text
panel functions (Application Kit)
paragraph style
parent window, defined
pasteboard functions (Application Kit)
pasteboard server
path flatness
path utilities functions
PDF image rendering
persistent domains
point functions
pop-up button interface
port name servers 2nd
port registration services
PPD file
presentation layer
primary identifier
print job information
Print panel
Print Preview window
printf-style formatting web site
process discovery
Project Builder, defined
property keys (AddressBook framework)
property list objects 2nd 3rd
proposed rectangle
protocols
  Application Kit
  defining
  Foundation
proxies



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

Quartz
- 2D API
- composite images and
- Compositor
- defined
- path-based drawing API

querying the contents of the array
quick reference, how it was generated
QuickDraw drawing commands
QuickTime movie data



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

range functions
rect functions
reference counting mechanism
Rendezvous network services
    web site
resources for Cocoa developers
    Apple documentation
    Apple partnering programs
    mailing lists
    related books
    web sites
resources, application
    loading resources
responder chain 2nd
    pattern, defined
retrieve objects from an archive
root class 2nd
rotating
ruler view
run loops 2nd 3rd
    defined



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

[ Team LiB ]

[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

scalar data items
scaling
scanners 2nd
scoping instance variables
screen readers
script suites
scriptable classes
scripting 2nd 3rd
  commands
  data types
  language reference form
  statements
scroll view 2nd
scrolling
Search Types enumeration
secure text
selectors, defined
serialization and deserialization operations
server setup
set
setAction: method
setTarget: method
sheet funtions
sheets
single inheritance language
singleton design pattern, defined
size functions
sleepUntilDate: method
slider controls
socket file descriptors
sockets
sound file player
special variables
spellchecking 2nd
Spelling panel 2nd
static typing, defined
status bars
Stepwise (Softtrak) web site
String Encodings enumeration
strings
  altering contents and attributes
  altering portions of
  attributes 2nd
  comparing
  manipulating
subprocesses
subviews

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir

superclass methods, overriding
superview
symbolic marker display

[ Team LiB ]

downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

target/action pattern 2nd
  defined
tasks
text
  drawing
  manual assembly of components
text attachments
text handling 2nd
  assembling
  classes
  layout
text input
text layout
  multicolumn text
  multiple simultaneous layouts
  paginating
  scenarios
  simple
text storage
text system class hierarchy
textual representations of cells 2nd
third-party frameworks
thread communication
thread locking
thread locks
threaded programming
threads, input resources
time zones 2nd
toolbars 2nd
  item identifiers
  methods
tracking rectangles
transform convenience constructor
transformations
translating



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

uncaught exceptions
undo and redo system
Unicode characters 2nd 3rd
  catalog web site
unique ID
Unix pipes
unordered collections
URL resources 2nd
user defaults 2nd



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

variables
- global
  - Application Kit
  - Foundation
- special

vector-based paths
view class
view hierarchy
view, defined
volatile domains



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

web sites for Cocoa developers
winding rule 2nd
  even-odd
  non-zero
window class
workspace services
wrapper, around a C data buffer
wrappers, file



downloaded from: lib.ommolketab.ir

downloaded from: lib.ommolketab.ir



[SYMBOL] [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N] [O] [P] [Q] [R] [S] [T] [U] [V] [W] [Z]

Zero Constants global variable
zero-configuration networking (zeroconf)
zones, memory



downloaded from: lib.ommolketab.ir